

Pierlux ECO Highbay Gen7

ECOHB200LSE5G7

- 200W / 170W / 150W / 100W System Power, 5K CCT
- 34,100lm / 29,600lm / 21,700lm / 18,400lm
- Flicker Free Driver

Performance

System Power	200W, 170W, 120W, 100W
Exit Lumen	34100lm, 29600lm, 21700lm, 18400lm
Efficacy	160lm/W
CCT	5000K
CRI	80
Operating Temperature	-25 to 50
Ingress Protection Rating	IP65
Impact Rating	IK08
Beam Distribution	Symmetric
Beam Angle	115°
Warranty	5 Years
Lifetime	50,000hrs (L70/B10)

Physical

Dimensions	L330 x W330 x H119 mm
Diffuser	Tempered Glass
Luminaire Colour	Black
Weight	2.5kg
Luminaire Material	Aluminium (Die Cast)
Driver Location	Integrated
Finish	Powder Coated
Installation	Suspended


Electrical

Voltage	240V
Line Voltage Frequency	50Hz
Inrush Current	65A
Inrush Current Duration	240µs
Line Current	0.85A
Surge protection	Yes
Electrical Rating	Class I



LUMEN SELECT™

Line Drawings

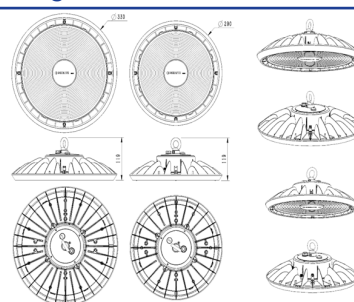


Product Images




Accessories

ECOHB120BRKT	120W SURFACE MOUNTING BRACKET KIT
ECOHB200BRKT	ECO HIGHBAY 200W SURFACE MOUNT BRACKET
HBPCREFR	HIGHBAY POLYCARBONATE REFRACTOR T/S ECO HB & DALI HIGHBAY
HBPCLENS	HIGHBAY POLYCARBONATE REFRACTOR LENS T/S ECO HB & DALI HIGHBAY
HBALREFL	HIGHBAY ALUMINIUM REFLECTOR T/S ECO HB & DALI HIGHBAY
HBWG	HIGHBAY WIRE GUARD FOR ECO HB & DALI HIGHBAY BOTH 120W & 200W
HBGRIP2MKIT	Highbay Gripple Suspension KIT - Purlin Bracket 2m Hanger c/w 214 Gauge & Screws

Product Images



Accessories

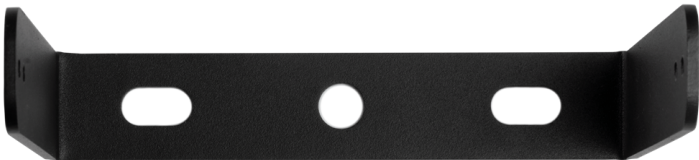

ECOHB120BRKT

*Rated LED design life where stated is based upon application of Pierlite's operating and maintenance guidelines; see pierlite.com.au. Actual product life may vary dependent upon frequency of maintenance and product application. Due to continual product improvement, information is subject to change without notification. Pierlite standard Terms and Conditions apply.