


OUTDOOR CHAMPION LED FLOOD LIGHT




CHAMPION LED flood light


- Suitable for use in decking areas, drives, pathways, sign illumination, wall washing, atriums, patios, car parks, garages, and industrial units
- LED replacement for 50-400W metal halide / 200-1500W halogen flood lights
- Die cast aluminium housing providing optimal heat dissipation and high resistance to weather conditions
- Pre-wired with 1m of rubber flex
- Tempered glass providing high impact rating of IK07
- Complete with stainless steel screws
- No warm up or cool down period required by LED
- High efficacy of 110-145 Lm/W
- 50,000 hour average lamp life
- Pre-drilled mounting bracket with 180° adjustable angle
- Suitable for switching by external PIR, Microwave or Photocell

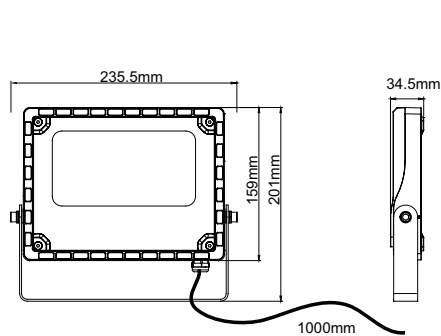


RCM3040-04

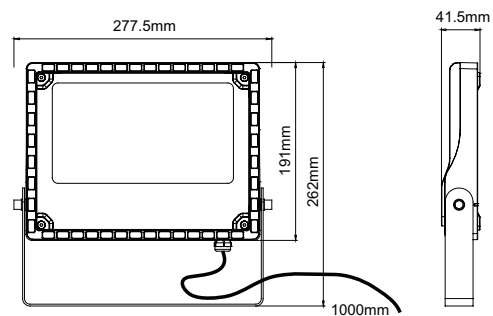

RCM5040-04

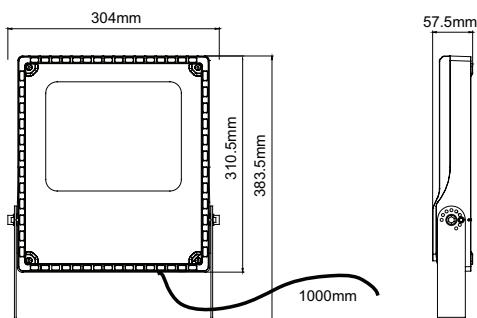

RCM10040-04

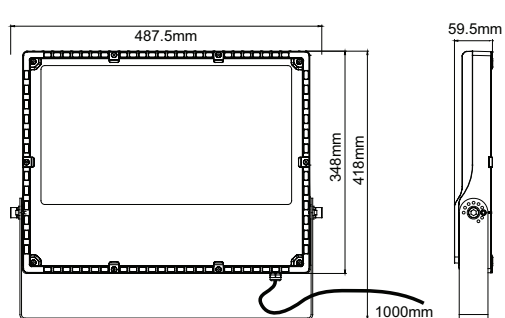

RCM13040-04
RCM17040-04




130W



170W

	30W	50W	100W	130W	170W
	RCM3040-04	RCM5040-04	RCM10040-04	RCM13040-04	RCM17040-04
Comparable to:	50W metal halide 200W halogen	80W metal halide 350W halogen	150W metal halide 800W halogen	250W metal halide 1200W halogen	400W metal halide 1500W halogen
Total Power (W):	28.8	47.8	94.6	127.0	174.7
Total Light Output (lm):	3,220	5,260	11,490	18,110	24,770
Efficacy (lm/cctW):	112	110	121	145	142
Lifetime (hrs):	50,000	50,000	50,000	50,000	50,000
Lux at 1m (lux):	1,200	1,900	4,200	6,780	8,920
Beam Angle (deg):	110	110	110	110	110
CCT (K):	4000	4000	4000	4000	4000
CRI:	80	80	80	80	80
Impact Rating (IK):	07	07	07	07	07
IP:	65	65	65	65	65
Power Factor (PF):	0.97	0.97	0.97	0.97	0.97
Height (mm):	201	262	383.5	418	418
Width (mm):	235.5	277.5	304	487.5	487.5
Depth (mm):	34.5	41.5	57.5	59.5	59.5
Box Qty:	1	1	1	1	1
Weight (kg):	1.1	1.6	3.5	5.9	5.9



MICRO Slimline LED flood light spike accessory

- Plastic 180mm spike for MICRO flood lights

	RMCSPIKE-04
Length (mm):	180
Diameter (mm):	40
Weight (kg):	0.4