

9W

IP65



PRODUCT INFORMATION DOCUMENT

CONSTRUCTION

- High quality polycarbonate housing
- Polycarbonate lamp heads and diffusers
- LiFePO4 battery

FEATURES

- IP65 Waterproof rating
- LED replacement for 2x50W halogen twin spots
- Prewired with 1.2m flex and plug
- 20mm conduit entries in side and back
- High quality LiFePO4 battery provides extended lifetime duration to comply with AS 2293
- 5-year warranty for the fitting and a 3-year warranty for the battery
- Input power is 4.9W / output power is 9W



FITTING WARRANTY



BATTERY WARRANTY



BATTERY



TESTING



RATED HOURS



IK RATING



IP RATING



OPERATING VOLTAGE



BEAM ANGLE



CCT





SAFETY CLASS

	RFN9165-01
Comparable to:	2x50W halogen
Total Power (W):	4.9
Total Emergency Light Output (lm):	1140
Emergency Lux at 1m (lux):	400
Emergency Classification	C0:D20 / C90:D25
Efficacy (lm/cctW):	N/A
IP:	65
Operation Temperature (°C)	0 ≤ Ta ≤ +45
CCT (K):	6500
RG Value:	RG0
L70B50 or the variant:	50000
Dimensions LxWxH	300x292x48
Weight (kg):	0.95

Product is certified to all the relevant standards.

Please contact our technical department for market specific compliances.

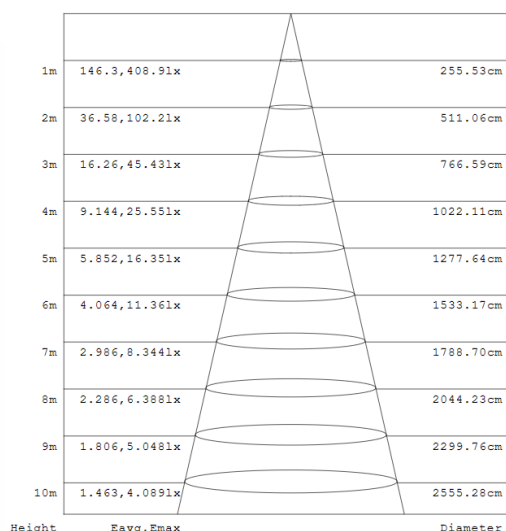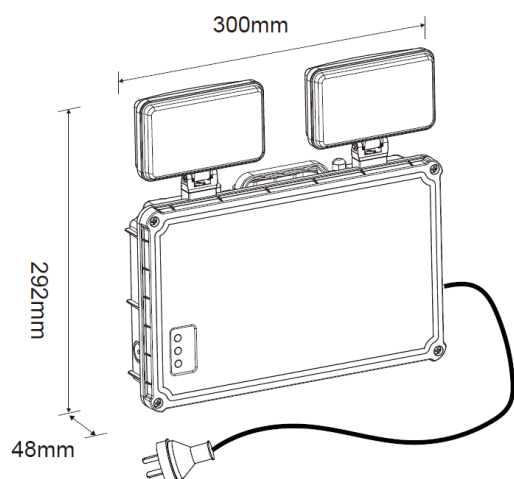

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

IRE: TEL: +353 1 709 9000
UK: TEL: 0800 973 220
AUS: TEL: +61 7 3890 5444
NZ: TEL: +64 03 668 5285

WEB: WWW.ROBUS.COM
WEB: WWW.ROBUS.COM
WEB: WWW.ROBUS.COM.AU
WEB: WWW.ROBUSLED.CO.NZ

LED GROUP EUROPE · AUSTRALIA · NEW ZEALAND · ASIA · MIDDLE EAST · AFRICA