

CASSIE TILT CCT3 LED DOWNLIGHT

8W

CCT3






PRODUCT INFORMATION DOCUMENT

CONSTRUCTION


- White or Black Nylon housing with polycarbonate trim
- Polymethyl methacrylate (PMMA) Diffuser with silver finish reflector
- Steel spring clips
- Pre-wired with 600mm Flex & Plug

FEATURES

- Switch on the back of the fitting allows selection between 3000K, 4000K, 5700K colour temperature
- Beam angle of 60 degrees with 30 degree tilt
- Very low glare with UGR <22 (black version) or UGR<25 (white version)
- Offers Thermal Insulation rating of IC-4
- High efficacy of 73-107Lm/W
- Dimming Compatible with most TRIAC dimmers (compatibility list available on the website)



PRODUCT CODE	RCS8CCT3T-01	RCS8CCT3T-04
Comparable to:	50W halogen	50W halogen
Total Power (W):	8.2/7.9/8.3	8.2/7.9/8.3
Total Light Output (lm):	760/840/770	590/660/610
Total Emergency Light Output (lm):	NA	NA
Efficacy (lm/cctW):	93/107/93	73/84/74
Lux at 1m (lux):	640/710/650	580/630/590
Emergency Lux at 1m (lux):	NA	NA
CCT (K):	3000/4000/5700	3000/4000/5700
IP:	44	44
Operation Temperature (°C)	-20 ≤ Ta ≤ +40	-20 ≤ Ta ≤ +40
Inrush Current:	1.4A/31us	1.4A/31us
RG Value:	0	0
Rated Life to L70B50 (Hrs):	>30000	>30000
Dimensions ØxH (mm):	106x84	106x84
Cut Out (mm):	90	90
Weight (kg):	0.21	0.21

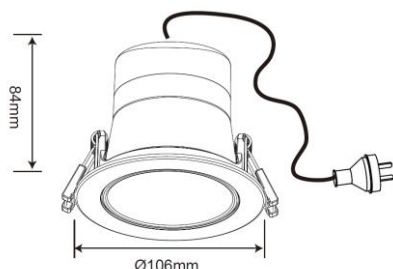

Product is certified to all the relevant standards.

Please contact our technical department for market specific compliances.

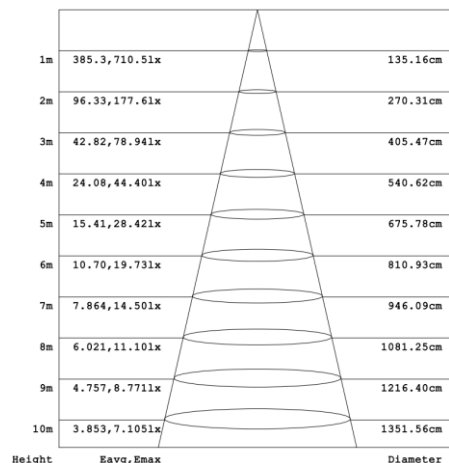


Diagram for RCS8CCT3-01 in 4000K. Other diagrams available on request

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

IRE: TEL: +353 1 709 9000
UK: TEL: 0800 973 220
AUS: TEL: +61 7 3890 5444
NZ: TEL: +64 03 668 5285

WEB: ROBUS.COM
WEB: ROBUS.COM
WEB: ROBUS.COM.AU
WEB: ROBUSLED.CO.NZ

LED GROUP EUROPE · AUSTRALIA · NEW ZEALAND · ASIA · MIDDLE EAST · AFRICA