


COMMERCIAL SUN CIRCULAR LED PANEL LIGHTS

SUN Circular LED Panel Light, Available in 15W & 18W versions

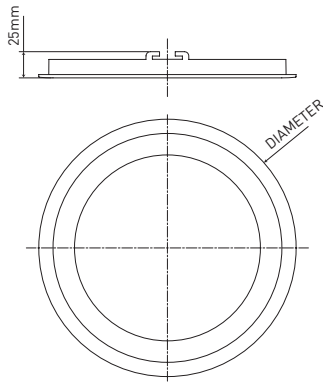

CODE	DIAMETER	DEPTH	CUT-OUT
R195LEDCAU	195mm	25mm	180mm
R225LEDCAU	225mm	25mm	210mm

- Complete with driver, flex and plug
- Light output comparable to 18W or 26W PL downlights
- 30,000 hour average rated LED life
- Simple to install and low/no maintenance
- Low glare diffuser ensures this product can be successfully used in offices, hospitals, restaurants, leisure, retail and educational centres
- Suitable for PIR switching
- Available in both cool white and warm white

Warm White

	15W	18W
	R195LEDCAU-30	R225LEDCAU-30
Total Power (W):	15	18
Power Factor:	0.9	0.9
Total Light Output (lm):	900	1,100
Beam Angle (deg):	120	120
Lux at 1m (lux):	320	400
CCT (K):	3,000	3,000
CRI:	75	75
Efficacy (lm/cctW):	60	60
Lifetime (hrs):	30,000	30,000
Diameter (mm):	195	225
Depth (mm):	25	25
Cut-Out (mm):	180	210
Weight (kg):	0.36	0.45
IP:	20	20

Cool White

	15W	18W
	R195LECAU-40	R225LECAU-40
Total Power (W):	15	18
Power Factor:	0.9	0.9
Total Light Output (lm):	1,000	1,200
Beam Angle (deg):	120	120
Lux at 1m (lux):	360	440
CCT (K):	4,000	4,000
CRI:	75	75
Efficacy (lm/cctW):	67	67
Lifetime (hrs):	30,000	30,000
Diameter (mm):	195	225
Depth (mm):	25	25
Cut-Out (mm):	180	210
Weight (kg):	0.36	0.45
IP:	20	20





COMMERCIAL
SUN CIRCULAR LED PANEL LIGHTS

SUN Circular 24W LED Panel Light,
Available in Cool White and Warm White

- Complete with driver, flex and plug
- Light output comparable to 32W PL downlights
- 30,000 hour average rated LED life
- Simple to install and low/no maintenance
- Low glare diffuser ensures this product can be successfully used in offices, hospitals, restaurants, leisure, retail and educational centres
- Suitable for PIR switching
- Available in both cool white and warm white

	Warm White	Cool White
	R300LEDCAU-30	R300LEDCAU-40
Total Power (W):	24	24
Power Factor:	0.9	0.9
Total Light Output (lm):	1,440	1,600
Beam Angle (deg):	120	120
Lux at 1m (lux):	320	360
CCT (K):	3,000	4,000
CRI:	70	70
Efficacy (lm/cctW):	60	67
Lifetime (hrs):	30,000	30,000
Diameter (mm):	300	300
Depth (mm):	25	25
Cut-Out (mm):	285	285
Weight (kg):	0.75	0.75
IP:	20	20

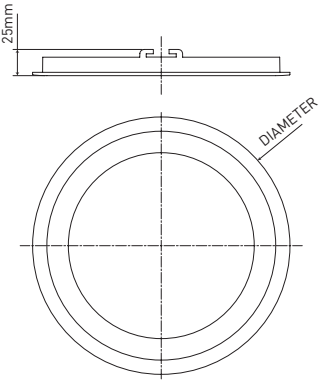

CODE	DIAMETER	DEPTH	CUT-OUT
R300LEDCAU	300mm	25mm	285mm