



CUBE II S9320 - 10W


LED 10 watt IP65 surface mounted CUBE wall luminaire

Application

Ideal for any residential or commercial interior or exterior space

Design Specifications

- Durable aluminium body profile, colour white or black
- Quality powder coat finish
- High efficiency SMD LED chips
- Independent up & down beam angle adjustable from 0° to 60°
- Integral constant current non-dimmable LED driver
- Indirect illumination optical performance




Technical Specification

Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI	Beam Angle (°)
S9320WW/WH	240	10	750	3000	80	60
S9320WW/BK	240	10	750	3000	80	60
S9320NDL/WH	240	10	900	5000	80	60
S9320NDL/BK	240	10	900	5000	80	60

Model No.	Dimmable	Dim (mm)	Body Colour
S9320WW/WH	NO	120(W) x 100(H)	WHITE
S9320WW/BK	NO	120(W) x 100(H)	BLACK
S9320NDL/WH	NO	120(W) x 100(H)	WHITE
S9320NDL/BK	NO	120(W) x 100(H)	BLACK

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".


Dimensions

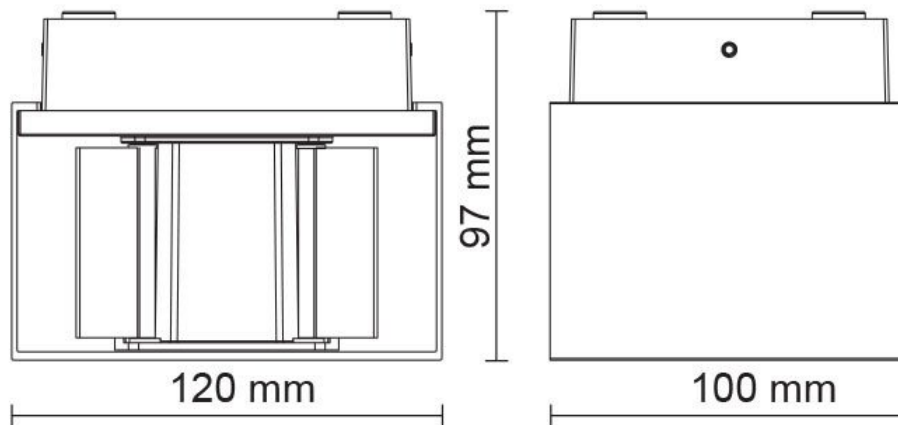

Photometric Data

Unit: cd C0/C180 C30/C210
cd C60/C240 C90/C270

S9320WW at 3000K





PIXIE AMBIENCE, CHANGE YOUR COLOUR TO MATCH YOUR STYLE.

The innovative PIXIE AMBIENCE SWITCH PLATES have been designed with the end user and installer in mind, allowing you to change the colour face plate as fashion demands.

For more
information
please
scan me

