





COOLUM PLUS S9168TC - 9W

9 watt dimmable, tilt downlight, with selectable colour temperature

Application

Ideal for residential or commercial interior applications

Design Specifications

- 9 watt integral dimmable driver
- A versatile design supplied with flex and plug fitted for easy installation
- High efficiency SMD LED chips, multi-faceted optical
- CRI > 80, CCT selectable, beam distribution 40 degree, 30 degree tilt
- Polyamide trim and body colour white or black
- IC 4 rated











Performance

Dimmable - YES

Technical Specification

Мо	del No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	сст (к)	Beam Angle (°)	Dimmable
S916	STC/WH	240	9	750/830/810	3000/4000/5700	40	YES
S916	68TC/BK	240	9	750/830/810	3000/4000/5700	40	YES


Model No.	CRI	Body Colour	Cut Out (mm)	Diameter (mm)	Dim (mm)
S9168TC/WH	80	WHITE	92	105	105(W) x 71(H)
S9168TC/BK	80	BLACK	92	105	105(W) x 71(H)

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with SAL Terms and Conditions of sale and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".






Dimensions

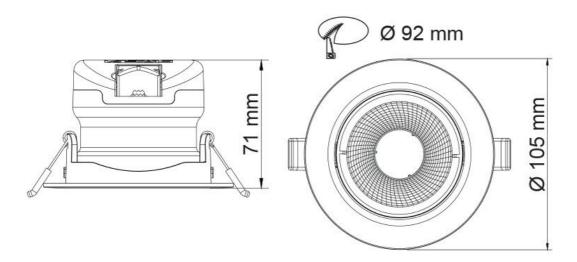

Photometric Data





THE SFI SYSTEM ELIMINATES LED FLICKERING.

SIMPLY MATCH THE ECOGEM SFI DOWNLIGHT WITH THIS SDD400SFI DIMMER







DIM with FLICKER CONTROL

For related products please scan me



NSW/ACT: 02 9723 3099 QLD: 07 3879 5999 VIC/TAS/SA/NT: 03 9532 3168 WA: 08 9248 7458

