



FLEXI 24V RGB IP44, FL2415RGB/S-15W/M

Run length 6 metre, RGB 24V, LED Strip IP44

Application

A creative solution for residential and commercial interior spaces




Design Specifications

- High efficiency SMD LED chips with 3M self-adhesive tape.
- Maximum run length per driver 6 m, cuttable every 100 mm at scissors symbol
- RGB colour changeable with compatible controller LT8915RGB/BT with LT8914RGB/RP if required
- Heat sink and 24V constant voltage LED driver required
- LED channel options refer this section

Performance

Dimmable - **OPTIONAL**

Dimmer Type - **PIXIE**

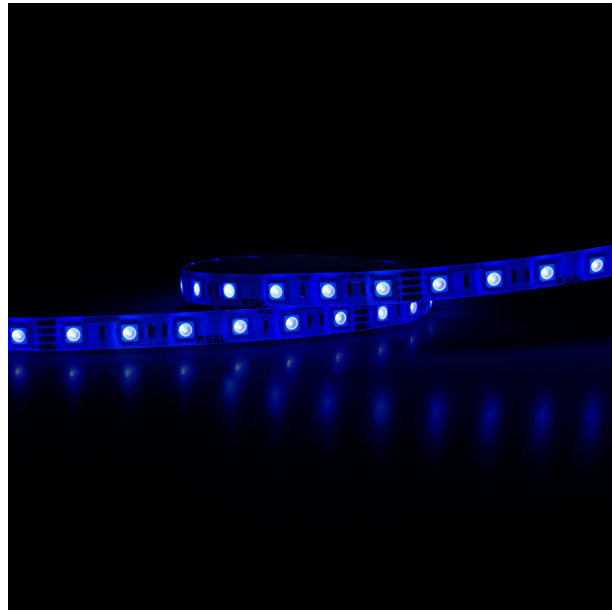


Technical Specification

Model No.	Input Voltage (V/DC)	Watts per metre (W/m)	Beam Angle (°)	LEDs Per Metre	Dim (mm)
FL2415RGB/S	24	15	115	60	10(W) x 3.5(H)

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

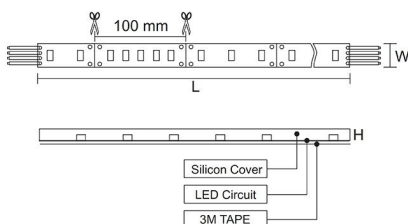

TO TURN YOUR HOME INTO A **PIXIE SMART** HOME, SELECT A **PIXIE CERTIFIED** INSTALLER.



SIMPLE!

For more
information
please
scan me

