



LED DOWNLIGHTS






www.sal.net.au

IP64 LED DOWNLIGHT

3 COLOUR TEMPERATURES SELECTABLE WITH A DIP SWITCH

S9071TC, S9072TC, S9073TC PREMIER

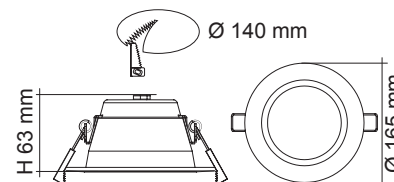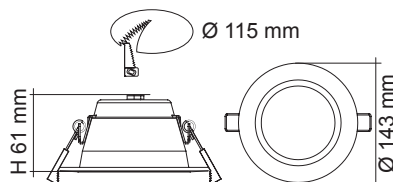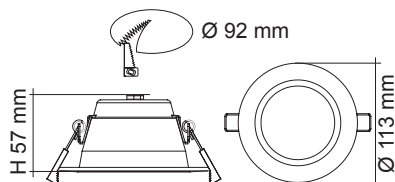

CONSTRUCTION

- Premium aluminium body
- Powder coated finish
- Opal acrylic diffuser
- High efficiency SMD LED chips
- Constant current LED driver fitted
- 1.2m flex & plug fitted

IP RATING

- IP64 weatherproof

APPLICATIONS

- Residential
- Hotels
- Shops
- Conference Rooms
- Reception areas

DIMMING OPTIONS

- Analogue dimming (1-10V)
- Digital dimming (DSI/DALI)

DIP SWITCH

- Select colour temperature with DIP switch





Model No.	Input	Power	Lumen	CCT	CRI	Beam Angle	Dimmable	Fitting Colour
S9071TC WH	240V	10W	800lm/900lm/900lm	3000K/4000K/5700K selectable	>80	90°	Yes	White
S9071TC SL	240V	10W	800lm/900lm/900lm	3000K/4000K/5700K selectable	>80	90°	Yes	Silver
S9072TC WH	240V	14W	1000lm/1150lm/1150lm	3000K/4000K/5700K selectable	>80	90°	Yes	White
S9072TC SL	240V	14W	1000lm/1150lm/1150lm	3000K/4000K/5700K selectable	>80	90°	Yes	Silver
S9073TC WH	240V	18W	1500lm/1700lm/1700lm	3000K/4000K/5700K selectable	>80	90°	Yes	White
S9073TC SL	240V	18W	1500lm/1700lm/1700lm	3000K/4000K/5700K selectable	>80	90°	Yes	Silver


PHOTOMETRIC DATA

Unit: cd

S9071 WP C0/C180 — C90/C270 — S9072 WP



S9073 WP





LED DOWNLIGHTS






www.sal.net.au

IP64 LED DOWNLIGHT

3 COLOUR TEMPERATURES SELECTABLE WITH A DIP SWITCH

S9071TC, S9072TC, S9073TC PREMIER

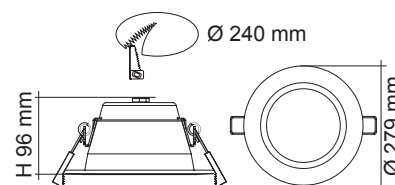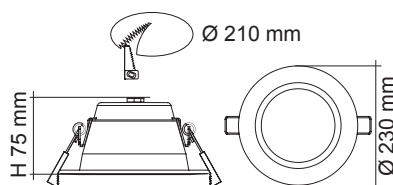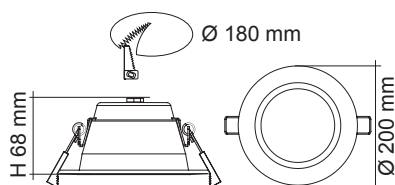

CONSTRUCTION

- Premium aluminium body
- Powder coated finish
- Opal acrylic diffuser
- High efficiency SMD LED chips
- Constant current LED driver fitted
- 1.2m flex & plug fitted

IP RATING

- IP64 weatherproof

APPLICATIONS

- Residential
- Hotels
- Shops
- Conference Rooms
- Reception areas

DIMMING OPTIONS

- Trailing edge dimming (S9074 & S9075)
- Analogue dimming (1-10V)
- Digital dimming (DSI/DALI)

DIP SWITCH

- Select colour temperature with DIP switch



Model No.	Input	Power	Lumen	CCT	CRI	Beam Angle	Dimmable	Fitting Colour
S9074TC WH	240V	20W	1600lm/1800lm/1800lm	3000K/4000K/5700K selectable	>80	90°	No	White
S9075TC WH	240V	30W	2600lm/2800lm/2800lm	3000K/4000K/5700K selectable	>80	90°	No	White
S9076TC WH	240V	40W	3600lm/3900lm/3900lm	3000K/4000K/5700K selectable	>80	90°	No	White

PHOTOMETRIC DATA

Unit: cd

S9074 WP C0/C180 — C90/C270 — S9075 WP

S9076 WP

