



PORT MKIII - SHP210MP 70/310W


IP66 LED area luminaire, IK10 rated with selectable power

Application

A decorative and versatile exterior commercial solution

Design Specifications

- Stylish die-cast aluminium body, durable powder coated finish in charcoal black
- Adjustable spigot (60mm OD) mounting, 0 - 90°
- High efficiency LED optics, CRI >70, CCT 5000K
- Integral constant current non-dimmable LED driver, pre-wired with 1500mm of 3 core rubber flex for easy termination
- Light distribution - Standard Symmetric (Type V), optional to order (Type III)
- PEB shorting cap provided as standard, optional PE cell configurations available

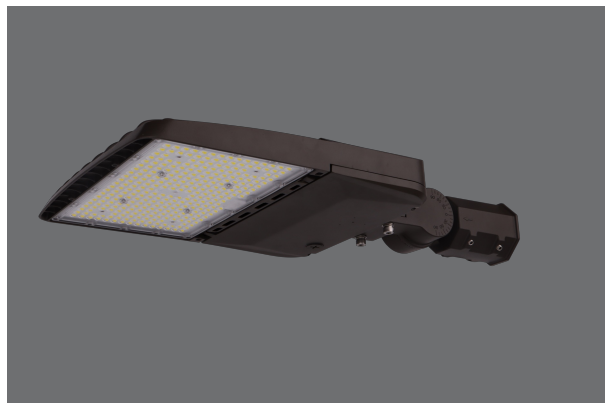

Performance

- Dimmable - **NO**
- In Built Sensor - **OPTIONAL**
- Sensor Type - **PE**



Technical Specification

Product	Model No.	Input Voltage (V/AC)	Power (W)	Multiple Wattage	Lumens (lm)	CCT (K)
	SHP210/70MP/NDL	240	70	30/40/50/70	5100/6800/8500/11900	5000
	SHP210/150MP/NDL	240	150	80/100/120/150	12000/15000/18000/22500	5000
	SHP210/240MP/NDL	240	240	170/200/220/240	25500/30000/33000/36000	5000
	SHP210/300MP/NDL	240	310	240/260/280/310	36000/39000/42000/46500	5000
	SHP210G3PE					
	SHP210G3UB					

CRI	Body Colour	Mass (kg)	Length (mm)	Width (mm)	Height (mm)
70	CHARCOAL BLACK	4.4	375	299	65
70	CHARCOAL BLACK	4.4	375	299	65
70	CHARCOAL BLACK	5.2	415	299	65
70	CHARCOAL BLACK	6.2	545	299	82
	OPAL	0.05			
	CHARCOAL BLACK	1.3			

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

SHP210G3UB

