



PANEL S9784TC/DP2 - 12/50W

LED panel with selectable CCT and power

Application

Designed for commercial and office space lighting tasks.



Design Specifications

- Extruded aluminium profile with high efficiency opal diffuser, suitable for a range of installation types
- Quality white powder coat finish, high efficiency SMD LED optics, CRI >80
- Remote constant current non-dimmable LED driver, complete with flex and plug
- Easy selectable colour temperature with an inbuilt DIP switch, 3000K/4000K/5700K and selectable power.
- Suspended wire or surface mount kits available


Performance

Dimmable - **OPTIONAL**

Dimmer Type - **Trailing edge, 1-10V, DALI / DSI**

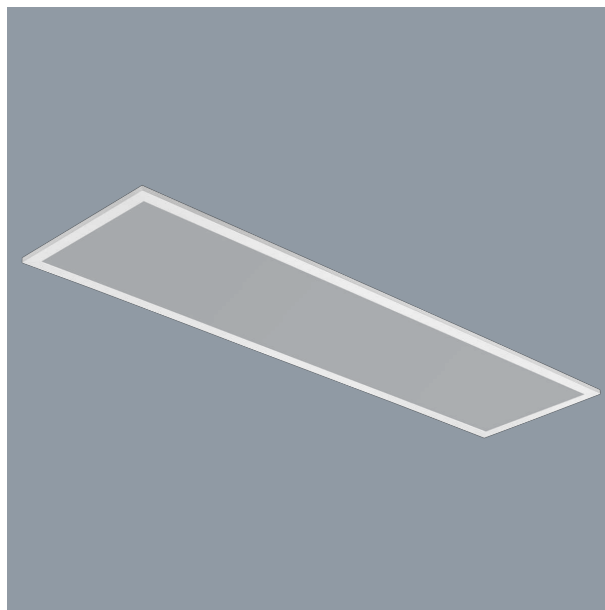

Technical Specification

Product	Model No.	Input Voltage (V/AC)	Multiple Wattage	Lumens (lm)	CCT (K)	CRI
	S9784/312TC/DP2	240	18/36	3400/3750/3650	3000/4000/5700	80

Beam Angle (°)	Body Colour	Dim (mm)
110	WHITE	1195(L) x 295(W) x 32(H)

Note (1) : Lumens (lm) shown are for TOTAL system performance.

Note (2) : For dimmable configurations, the CCT must be specified at the time of order and the DP function is deactivated.

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".



LED downlights, oysters, linear battens and profiles,
track lights, strip lights, interior architectural, highbays,
lamps, emergency, floodlights, exterior architectural,
weatherproof, bulkheads, sensors, electrical accessories,
smart lighting controls, drivers

For more
information
please
scan me

