



RENMARK S9083R - 24/35W TC/DP


IP44, 24/35W LED downlight with selectable colour temperature and power

Application

Ideal for any retail, residential or commercial interior space

Design Specifications

- Premium aluminium body profile, IC-4 rated
- Stylish white body profile and WH trim with optional WH square, BK round or BK square quick connect trims to order
- High performance faceted reflector profile, beam 60°, UGR <19
- High efficiency SMD LED chips
- Remote constant current selectable power, flickerCONTROLLED LED driver, with flex and plug
- Selectable colour temperature 3000, 4000, 5700K







Performance

Dimmable - **OPTIONAL**

Dimmer Type - **Trailing Edge**

Technical Specification



Product	Model No.	Input Voltage (V/AC)	Multiple Wattage	Lumens (lm)	CCT (K)	Beam Angle (°)
	S9083R35TC/DP	240	24/35	3500/4000/3850	3000/4000/5700	60
	S9083SQ/WH/P					
	S9083RD/BK/P					
	S9083SQ/BK/P					

Dimmable	CRI	Body Colour	Cut Out (mm)	Diameter (mm)	Dim (mm)
OPTIONAL	80	WHITE	195	232	110(H)
		WHITE	195		232(L) x 232(W)
		BLACK	195	232	
		BLACK	195		232(L) x 232(W)

NOTE: lumens (lm) displayed are at MAXIMUM power

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

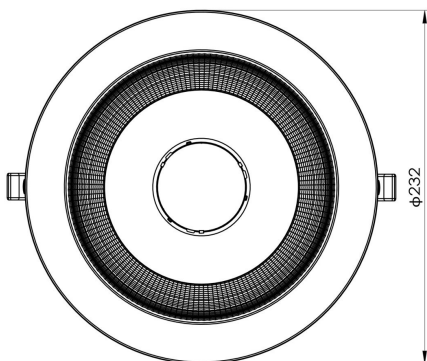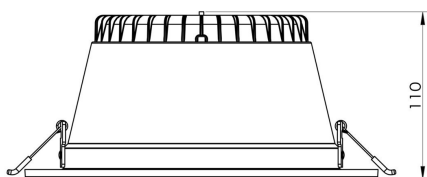

THE SFI SYSTEM ELIMINATES LED FLICKERING.

**SIMPLY
MATCH THE
ECOGEN SFI
DOWNLIGHT
WITH THIS
SDD400SFI
DIMMER.**



**DIM with
FLICKER
CONTROL**

For related
products
please
scan me

