



Head Office
40 Biloela Street
Villawood NSW 2163
T +612 9723 3099
F +612 9724 1899

Victoria
46-48 Keys Road
Moorabbin VIC 3189
T +613 9532 3168
F +613 9532 1838

Queensland
13/258 Musgrave Road
Coopers Plains QLD 4108
T +617 3276 8897
F +617 3277 8817


WA Agencies
Delta Lighting System
15 Hunt St. Malaga WA 6090
T +618 9249 4447
F +618 9249 2776



SL7266 MINI SPIKE



S7266WW/BK

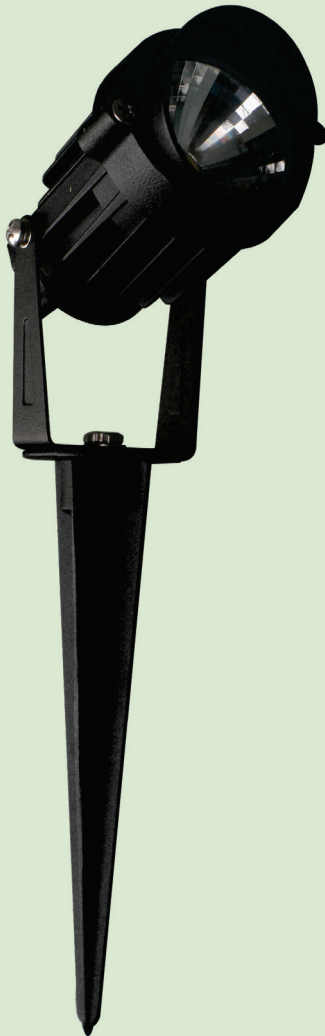

FEATURES

- Die-cast aluminium body
- Powder coated finish
- COB LED with reflector
- 12V AC or DC driver required
- 1.5 m double insulated cable fitted
- IP65 weatherproof


AVAILABLE COLOUR TEMPERATURE

- 2900K WARM WHITE

AVAILABLE FITTING COLOURS

- Black - Powder coated finish

DIMENSIONS

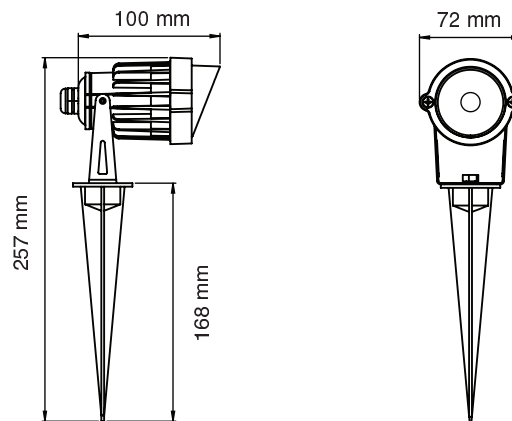

TECHNICAL SPECIFICATIONS

Model No.	Input Voltage	System Power	Luminous Flux	Colour Temp	Beam Angle	CRI (Ra)	Fitting Colour
SL7266WW/BK	12V AC/DC	6W	400lm	2900K	30°	>80	Black