

## LED DIFFUSED BATTEN

### SLD2000, SLD4000 LEDLINE



SLD4000



SLD2000

#### CONSTRUCTION

- Pressed steel body
- Powder coated finish
- Opal PMMA diffuser
- High efficiency SMD LED chips
- Constant current LED driver fitted
- Large terminal block, easy installation
- Unique diffuser fixing allows end to end installation

#### IP RATING

- IP20 suitable for indoor use only

#### COLOUR TEMPERATURE

- 4000K COOL WHITE

#### DIMMING OPTIONS

- Analogue (Trailing edge, 1-10V)
- Digital dimming (DSI, DALI)

#### EMERGENCY OPTIONS


- Compliant to AS2293

#### EMERGENCY CLASSIFICATIONS


- D63@C0, C180
- D32@C90, C270

#### DIMENSIONS


SLD2000



SLD4000

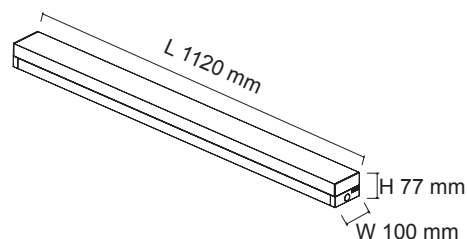

Model No.	Input	Power	Lumen	CCT	CRI	Beam Angle	Dimmable	Fitting Colour
SLD2000CW	240V	20W	1900lm	4000K	>80	120°	No	White
SLD4000CW	240V	40W	3800lm	4000K	>80	120°	No	White



## LED LINEAR & PROFILES



SLD2000 and SLD4000 inner view