



## SENSOR SMS807CR

PIR Sensor - recessed mount, 40mm cut-out

### Application

Versatile residential and commercial sensor

### Design Specifications

- Switched power 800W incandescent, 400W fluorescent, 300W LED
- Standby power <0.5W
- Detection distances Max. 6.0m in diameter at 4.0m mounting height, Max. 4.0m diameter at 2.2m mounting height.
- Detection angle 360° , Adjustable time delay Min, 10sec / Max. 7min
- Adjustable light (lux) sensitivity <10 - 2000 lux
- Manual override function, low profile white design, 40mm cut-out




### Performance

In Built Sensor - **YES**


Sensor Type - **PIR**

### Technical Specification

Product	Model No.	Input Voltage (V/AC)	Power (W)	Body Colour
	<b>SMS807CR</b>	240	800	WHITE

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

## Dimensions

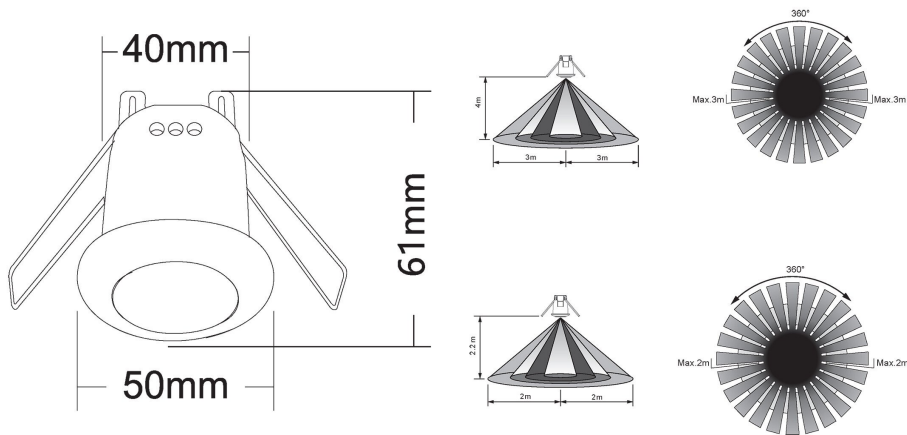



Selection of optional  
key caps and cover plate  
designs available

# PIXIE AMBIENCE, CHANGE YOUR STYLE.

The innovative PIXIE AMBIENCE GPO has been designed with the end user and installer in mind, allowing you to change the style or the colour face plate as fashion demands.

In addition to the standard 240V, 2400watt capacity, the AMBIENCE double GPO includes an innovative PIXIE Multifunction control, which when paired with another PIXIE Master device, you can create a scene, set a schedule and more!

For more  
information  
please  
scan me

