



TRADEGEM S9141TCSM - 9W

Dimmable IP20 9 watt surface mount LED downlight with selectable CCT

Application


Ideal for any residential or commercial interior space

Design Specifications



- Selectable CCT 3000K/4000K/5700K
- Durable aluminium surface mount body profile, IP20
- Stylish white or black powder coat finish
- Opal polycarbonate diffuser
- High efficiency LED optics
- Integral constant current trailing edge dimmable LED driver

Performance

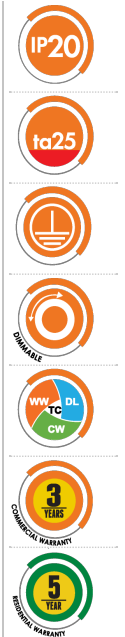- Dimmable - **YES**
- Dimmer Type - **Trailing edge**



Technical Specification

| Product | Model No. | Input Voltage (V/AC) | Power (W) | Lumens (lm) | CCT (K) | Beam Angle (°) |
|---|----------------------|----------------------|-----------|-------------|----------------|----------------|
|  | S9141TC/WH/SM | 240 | 9 | 700/850/800 | 3000/4000/5700 | 110 |
|  | S9141TC/BK/SM | 240 | 9 | 700/850/800 | 3000/4000/5700 | 110 |


| Dimmable | CRI | Body Colour | Diameter (mm) | Dim (mm) |
|----------|-----|-------------|---------------|------------------|
| YES | 80 | WHITE | 82 | 81.5(W) x 110(H) |
| YES | 80 | BLACK | 82 | 81.5(W) x 110(H) |

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions




Dimensions



Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9141TC SM at 4000K



THE SFI SYSTEM ELIMINATES LED FLICKERING.

**SIMPLY
MATCH THE
ECOGEN SFI
DOWNLIGHT
WITH THIS
SDD400SFI
DIMMER.**



**DIM with
FLICKER
CONTROL**

For related
products
please
scan me

