



## UFO II SHB25HEDL - 80/180W

Dimmable 1-10V, IP65 LED multi-function highbay or lowbay

### Application

Ideal for any commercial or industrial interior space

### Design Specifications

- Multi-function highbay or lowbay with optional quick connect CorridorSTANDBY dimming sensor
- Die-cast aluminium body, black powder coat finish
- High efficiency SMD LED optics
- Clear polycarbonate lens, 120° lens
- Integral 1-10V dimmable LED driver with 4KV surge protection, IP65, IK08 rated, complete with flex and plug for easy installation
- Wide selection of optional mounting, optical and control accessories, including a DALI 24V signal converter to 1-10V

### Performance

Dimmable - **YES**

Dimmer Type - **1-10V or SAL DALI SIGNAL CONVERTER**



### Technical Specification

Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	Beam Angle (°)	CRI
SHB25HE80DL	240	80	12000	5700	120	80
SHB25HE120DL	240	120	18000	5700	120	80
SHB25HE180DL	240	180	27000	5700	120	80
SHB25HE/CS						


Model No.	Body Colour	Dim (mm)	Mass (kg)	IPART	VEET
SHB25HE80DL	BLACK	251(W) x 175(H)	2.2	YES	YES
SHB25HE120DL	BLACK	271(W) x 183(H)	2.4	YES	YES
SHB25HE180DL	BLACK	341(W) x 184(H)	3.2	YES	YES
SHB25HE/CS	STANDBY SENSOR				

Note (1) : Sensor default settings: Sensitivity=100%, Hold Time=30mins, StandBy power=30%, StandBy time 30mins, Daylight Threshold=disabled

Note (2) : Sensor and dimming functions cannot be operated simultaneously

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

## Dimensions

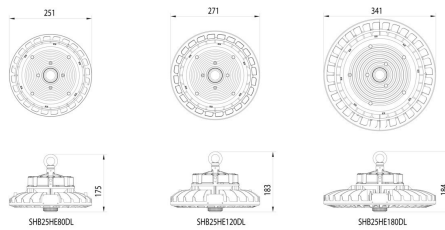

### Accessories



Bracket for Low Bay  
SHB25HE120PLB  
SHB25HE180PLB



Metal reflector  
SHB25HE120PMR  
SHB25HE180PMR



Clear polycarbonate reflector  
SHB25HE120PPR  
SHB25HE180PPR



DALI signal converter  
LM-DALI0108



corridorSTANDBY sensor  
SHB25HE/CS




Remote control  
SHB25HE/RC




Daylight harvesting sensor  
SMS761

## Photometric Data


SHB25HE80DL

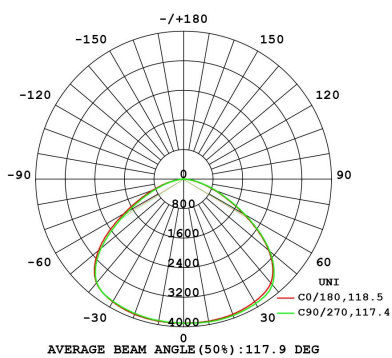

SHB25HE120DL

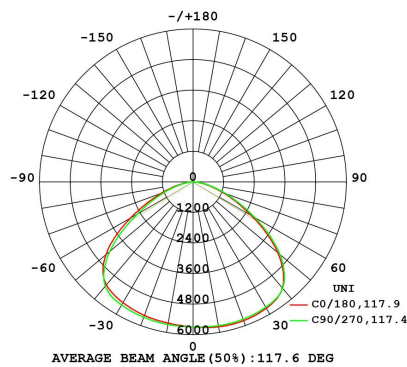

SHB25HE180DL

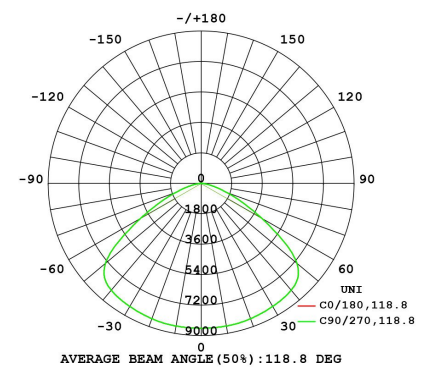

# THE NEW UFOIII SHB27 TC LED HIGHBAY

WITH TC CONTROL  
AND POWER CONTROL  
ALL IN ONE



**TC SELECTABLE COLOUR**

WARM WHITE

COOL WHITE

NEUTRAL  
DAYLIGHT

**SELECTABLE POWER**

For related  
products  
please  
scan me

