



## WAVE SE S9065TC/MS - 9W

IP44 LED downlight with selectable CCT and movement sensor

### Application

Ideal for any residential or strata common area interior spaces

### Design Specifications


- Selectable CCT 3000K/4000K/5700K and integral microwave sensor
- Microwave sensor adjustments - 5sec/90sec/5min/30min, daylight threshold 30 lux / disable, detection distances 8M diameter @ 2.4hm, 6M diameter @ 4.0hm
- Opal polycarbonate diffuser
- Integral constant current non-dimmable LED driver, with flex and plug
- Poly covered aluminium body, double insulation, IC - 4 rated
- Deco ring options - Satin Nickel (S9065SN/RING), Black (S9065BK/RING)



### Performance

- In Built Sensor - **YES**
- Sensor Type - **MICROWAVE**

### Technical Specification


Product	Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	Beam Angle (°)
	<b>S9065TC/MS</b>	240	9	750/900/800	3000/4000/5700	90

Dimmable	CRI	Body Colour	Cut Out (mm)	Diameter (mm)	Dim (mm)
NO	80	WHITE	92	113	59(H)

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".


## Dimensions

### S9065

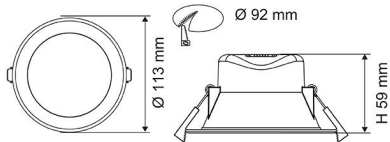

#### SENSOR ADJUSTMENT UNDER TERMINAL COVER


S1	S2	Time	S3	Lux
0	0	5s	0	Disable
1	0	90s	1	30Lux
0	1	5min	1	(ON)
1	1	30min	0	(OFF)

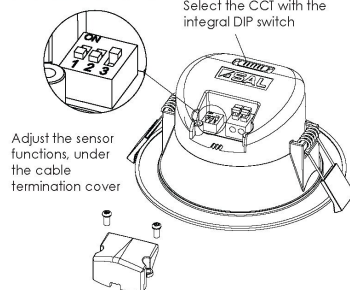

## Photometric Data

Unit: cd C0/C180 — C90/C270 —

#### S9065TC at 3000K



# THE SFI SYSTEM ELIMINATES LED FLICKERING.

**SIMPLY  
MATCH THE  
ECOGEN SFI  
DOWNLIGHT  
WITH THIS  
SDD400SFI  
DIMMER.**



**DIM with  
FLICKER  
CONTROL**

For related  
products  
please  
scan me

