

ZBRRC

Programmable receiver - 4 PNP - 200 mA - 24 V DC - 2 pusbuttons - 6 LEDs



Main

Range of product	Harmony
Product or component type	Programmable receiver
Device short name	ZBRRC
Output type	4 PNP
Product specific application	Interface to PLC
Function of module	Monostable
Reset time	2 ms (time delay)

Complementary


Maximum switching current	0.2 A DC
[Us] rated supply voltage	24 V DC - 15...20 %
Utilisation category	DC-13 conforming to IEC 60947-5-1
Power consumption in VA	20 VA DC
Power consumption in W	20 W DC
Immunity to microbreaks	7 ms
Width	35 mm
Output contacts	4 PNP
Nominal output current	0.2 A
Operating position	Any position without derating
Electrical connection	1 conductor cable 0.14...2.5 mm ² - AWG26...AWG14 - solid - without cable end conforming to IEC 60947-1 2 conductors cable 0.14...1.5 mm ² - AWG26...AWG16 - solid - without cable end conforming to IEC 60947-1 1 conductor cable 0.14...4 mm ² - AWG26...AWG12 - flexible - with cable end conforming to IEC 60947-1 2 conductors cable 0.14...1.5 mm ² - AWG26...AWG16 - flexible - with cable end conforming to IEC 60947-1
Tightening torque	0.5...1 N.m conforming to IEC 60947-1
Housing material	Self-extinguishing plastic
Status LED	1 LED green for power ON 1 LED green and yellow for reception signal 4 LEDs green for relay ON
Mounting support	35 mm symmetrical DIN rail conforming to EN/IEC 60715

The information provided in this documentation contains general descriptions and/or technical characteristics of the products of the company Schneider Electric. This information is not intended to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.


Environment

Standards	IEC 6100-4-2 IEC 6100-4-3 IEC 6100-4-4 IEC 6100-4-5 IEC 6100-4-6 IEC 6100-4-11
Product certifications	CSA C-Tick GOST UL ANATEL SRRC
Marking	CE
Ambient air temperature for storage	-40...70 °C
Ambient air temperature for operation	-25...55 °C
Relative humidity	90 % at 55 °C
Vibration resistance	+/- 6.2 mm (f= 5...11 Hz) conforming to IEC 60068-2-6 3 gn (f= 11...150 Hz) conforming to IEC 60068-2-6
Shock resistance	30 gn (duration = 11 ms) conforming to IEC 60068-2-27
IP degree of protection	IP20 on casing conforming to IEC 60529 IP20 on terminals
Pollution degree	2 conforming to IEC 60664-1
Overvoltage category	III conforming to IEC 60664-1
Insulation resistance	> 500 MOhm at 500 V DC conforming to NF C 20030
[Ui] rated insulation voltage	< 60 V conforming to IEC 60664-1
Electromagnetic compatibility	Conducted emission conforming to EN 300-489-3 and EN 300-489-1 Radiated emission conforming to EN 300-440-1 and EN 300-440-2
Resistance to electrostatic discharge	8 kV in free air (in insulating parts) conforming to IEC 61000-4-2 6 kV on contact (on metal parts) conforming to IEC 61000-4-2
Resistance to electromagnetic fields	10 V/m, f = 80...2000 MHz conforming to IEC 60947-5-1 3 V/m, f = 80...2700 MHz, distance = 20 m conforming to IEC 60947-4-3
Resistance to fast transients	1 kV (PNP output wires) 2 kV (power supply wires)

Programmable Receiver

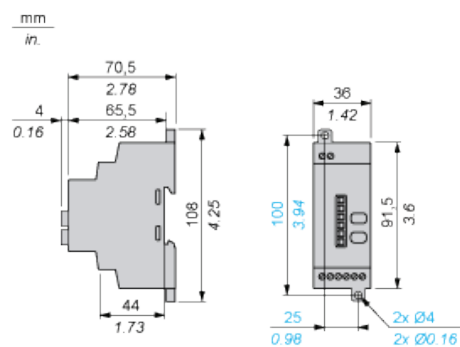


Receiver Clearance

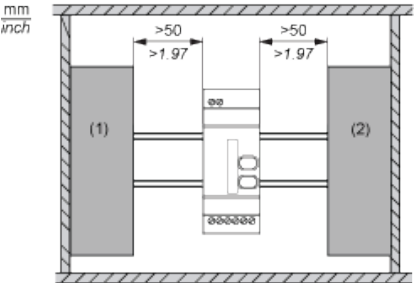


- (1) Drive
- (2) Power Supply or PLC

Receiver Mounting

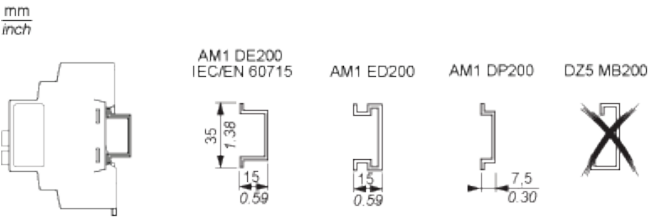

Programmable Receiver

Wiring Diagram

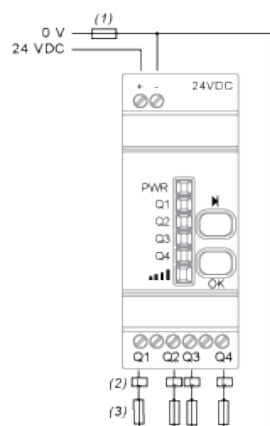

- (1) 400 mA fast-blow fuse
- (2) $I_{max} = 200 \text{ mA}$
- (3) $I_{max} = 300 \text{ mA}$