

XENON STROBE BEACONS

MaxiXenoflash

SIRENA s.p.a.

- 2J and 6J versions
- AC/DC in low voltage version
- Double insulated
- Optional aluminium base with M20 entry
- Double flash version available
- High quality


SPECIFICATIONS

MODEL	VOLTAGE	CURRENT	CANDELA
MXFN2J12/24CA	12/24Vac/dc	500/440mA	700 Cd(p)
MXFN2J110A	110Vac	80mA	1100 Cd(p)
MXFN2J240A	240Vac	43mA	1250 Cd(p)

6 JOULE

MODEL	VOLTAGE	CURRENT	CANDELA
MXFN6J12/24CA	12/24Vac/dc	1.8/0.85A	3,000 Cd(p)
MXFN6J110A	110Vac	130mA	2,000 Cd(p)
MXFN6J240A	240Vac	100mA	5,000 Cd(p)

Flash Rate:	65 fpm ± 10
Flash Energy:	2 J or 6 J
Voltage Tolerance:	$\pm 10\%$ (ac 50/60Hz)
Protection:	IP54
Temp Rating (°C):	-30 to +40
Cable Entry:	M16 (M20 with optional aluminium base)
Construction:	Polycarbonate Base (optional aluminium), Polycarbonate Lens
Weight:	0.55Kg

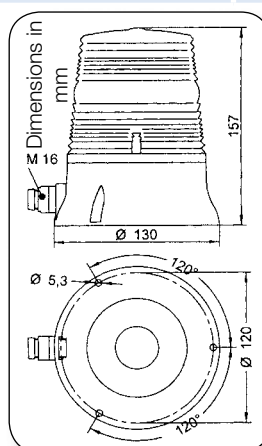

ORDER CODE

2 Joule	6 Joule	
SIR2202430*	SIR2202440*	12/24Vac/dc
SIR2211030*	SIR2211040*	110Vac
SIR2224030*	SIR2224040*	240Vac

****SPECIFY COLOUR** A = Amber, B = Blue, C = Clear, G = Green, R = Red

Add M to end of code for aluminium base

ACCESSORIES AND SPARE PARTS

SIR3400001*	Maxi-Xenoflash Dome (**Specify Colour)
SIR3999020	2 Joule Xenon Tube
SIR3999060	6 Joule Xenon Tube

