

Proven Performance

Selected for use in the World's Tallest Residential Tower, Q1 on the Gold Coast, Stanilite Cold Cathode exits have a proven track record of providing energy and cost savings. **50,000 HOUR LAMP LIFE**

PROVEN IN THE FIELD Stanilite Cold Cathode lamped exit signs have been installed in buildings since the year 2000 and have proven their ability to reduce both running and maintenance costs. Up to **300% MORE**

ENERGY EFFICIENT Significant cost savings over competing 8W & 10W fluorescent exits. **EMERGENCY CLASSIFICATION**

Stanilite Cold Cathode exits carry a full emergency classification hence eliminating the need for an adjacent emergency luminaire.

EASY MAINTENANCE Stanilite Cold Cathode tubes are user replaceable saving precious time and money.



www.tnbaust.com

To talk about using Stanilite[®] LUMATEC[®] Cold Cathode Technology on your next development call **1300 666 595**

Thomas & Betts

QUICKFIT 



The Quickfit range of exits is Australia's first choice for quality signage. Featuring cold cathode technology, the Quickfit Lumatec line up uses the only proven long life lamp in the Australian evacuation signage market. The Lumatec lamp is not only energy efficient but only needs to be replaced every 50,000 hours. The Quickfit also features a unique steel slide and connect bracket that provides strength, is compatible with all current and previous models for easy retrofit and enables quick and easy maintenance. Only the Quickfit bracket needs to be installed during fitout, which can greatly reduce damage.

The Quickfit is available in a complete range including Theatre Mask and Nexus models to cater for the entire project.

Features

- Stanilite Lumatec® cold cathode 6 year rated lamp
- BBEB electronic ballast technology
- Advanced dual rate battery charger with high temperature NiCad batteries
- Universal wall/ceiling mounting
- 24m viewing distance



Stanilite
LUMATEC

Quickfit Lumatec® Cold Cathode 50,000HR Standard – Pictograph

Part No.	Description
PQFDR50KSS	4W Maintained Single Sided DR 50K Hour Lamp
PQFDR50KDS	4W Maintained Double Sided DR 50K Hour Lamp

Note The above Standard Lumatec Cold Cathode Quickfits® include all Pictograph insert options.

Quickfit Lumatec® Cold Cathode 50,000HR Theatre Mask – Pictograph

PQFBDR50K-0001	4W Maintained T/Mask Single Sided DR 50K Hour Lamp, PICTO
PQFBDR50K-0002	4W Maintained T/Mask Single Sided DR 50K Hour Lamp, <PICTO
PQFBDR50K-0003	4W Maintained T/Mask Single Sided DR 50K Hour Lamp, PICTO>
PQFBDR50K-0005	4W Maintained T/Mask Double Sided DR 50K Hour Lamp, PICTO
PQFBDR50K-0006	4W Maintained T/Mask Double Sided DR 50K Hour Lamp, AOW PICTO

Note Theatre Mask range does not use inserts. Theatre mask exits do not have an emergency classification.

Stanilite
nexusLX

Quickfit Lumatec® Cold Cathode 50,000HR Standard Nexus® – Pictograph


Part No.	Description
PQFNXSDR50KSS	Nexus 4W Maintained Single Sided DR 50K Hour Lamp
PQFNXSDR50KDS	Nexus 4W Maintained Double Sided DR 50K Hour Lamp

Note The above Standard Nexus Cold Cathode Quickfits® include all Pictograph insert options.

Quickfit Lumatec® Cold Cathode 50,000HR Theatre Mask Nexus® – Pictograph

Part No.	Description
PQFBNXSDR50K-1	Nexus 4W Maintained T/Mask Single Sided DR 50K Hour Lamp, PICTO
PQFBNXSDR50K-2	Nexus 4W Maintained T/Mask Single Sided DR 50K Hour Lamp, <PICTO
PQFBNXSDR50K-3	Nexus 4W Maintained T/Mask Single Sided DR 50K Hour Lamp, PICTO>
PQFBNXSDR50K-5	Nexus 4W Maintained T/Mask Double Sided DR 50K Hour Lamp, PICTO
PQFBNXSDR50K-6	Nexus 4W Maintained T/Mask Double Sided DR 50K Hour Lamp, AOW PICTO

Note Theatre mask range does not use inserts. Theatre mask exits do not have an emergency classification.

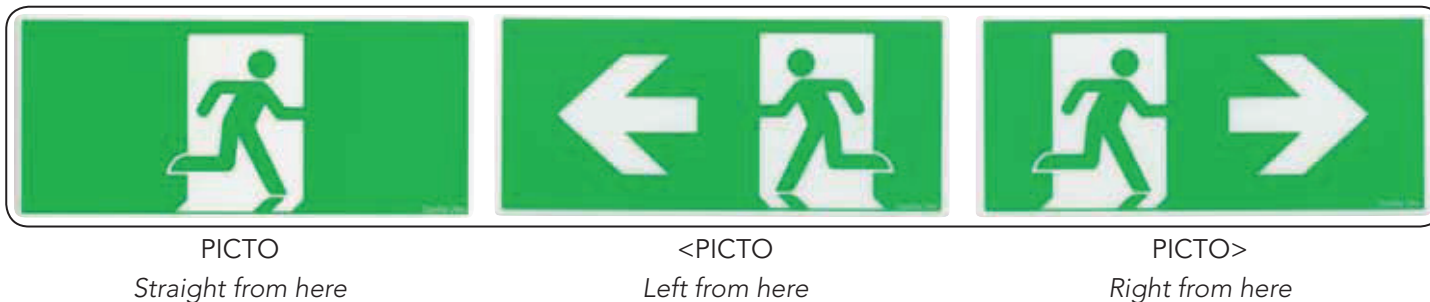

Exit Inserts

Lumatec Cold Cathode Standard Pictograph Quickfits® are supplied with all Pictograph insert options. For EXIT Insert Peel off Arrow, see below table:

Part No.	Description
29-E1-10	EXIT Insert Peel off Arrow 10 Pack

Technical Specifications

Photometrics & Luminaires Spacings												
Product	Classification		Mounting Height in Metres									
			2.1	2.4	2.7	3.0	3.3	3.6	4.0	4.5	5.0	6.0
PQFDR50KSS	C0	E1.25	5.2	5.2	5.4	5.2	5.0	4.6	4.8	4.0		
	C90	E1.25	4.2	4.2	4.0	3.6	4.0	3.0				
PQFDR50KDS	C0	E2.5	5.6	5.8	5.8	6.0	5.8	5.8	5.2	5.2	4.6	
	C90	E2.5	5.2	5.2	5.4	5.2	5.0	4.6	4.8	4.0		

* Nexus versions of the above have the same data

Note Under AS2293.1-2005, exit signs shall be mounted not less than 2m and not more than 2.7m above floor level, or immediately above the doorway if the doorway is higher than 2.7m. However, variations to these heights shall be allowed when specifically agreed by the relevant regulatory authority.

Power Consumption



240V AC 50HZ

• 4W Quickfit Lumatec Exit	6.6W
• 4W Quickfit Lumatec Nexus Exit	7.2W

Construction

• Body	Moulded ABS
• Bracket	Zinc Steel – White Powder Coated
• Diffuser	Moulded Acrylic

Dimensions

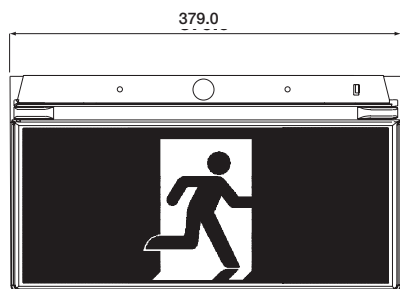

Single Sided – Double
Sided dimensions are
the same

Parts & Accessories

Part No.	Description
Bodies	
MQFDR50KMQ-0010	Quickfit Lumatec CC 50K no diffuser or back plate
MQFDR50KMQ-0011	Quickfit Lumatec CC 50K no diffuser
MQFNXSDR50KMQ-10	Quickfit Nexus Lumatec CC 50K no diffuser or back plate
MQFNXSDR50KMQ-11	Quickfit Nexus Lumatec CC 50K no diffuser
PQFBD50K-0010	Quickfit T/Mask Lumatec CC 50K no diffuser or back plate
PQFBD50K-0011	Quickfit T/Mask Lumatec CC 50K no diffuser
PQFBNXSDR50K-10	Quickfit Nexus T/Mask Lumatec CC 50K no diffuser or back plate
PQFBNXSDR50K-11	Quickfit Nexus T/Mask Lumatec CC 50K no diffuser
Diffusers	
31-PQFCC	Quickfit Lumatec CC Pictograph diffuser – includes PICTO insert
31-PQFCC-B	Quickfit Lumatec CC Pictograph diffuser – no insert
31-PQFT1	Quickfit 10W theatre mask PICTO diffuser
31-PQFT2	Quickfit 10W theatre mask <PICTO diffuser
31-PQFT3	Quickfit 10W theatre mask PICTO> diffuser
Back Plates	
31-MQBP	Back plate to suit Quickfit standard
31-MQBPB	Back plate to suit Quickfit theatre
Wire Guards	
QFWGCM	Quickfit wire guard ceiling mount
QFWGWM	Quickfit wire guard wall mount
Mounting Bracket	
03-02060	Ceiling bracket assembly white powder coated
03-02061	Ceiling bracket assembly black powder coated
MQFCL	Cantilever mounting bracket
Lamps	
CCFL4-5	Lumatec 4W lamp to suit Cold Cathode Quickfits – pack of 5
Batteries	
03-01205	Battery 6 cell sub C to suit DR50K Quickfits



MQFCL Bracket

Thomas & Betts emergency lighting products are tested to comply with AS2293 and meet relevant Australian EMC Standards. Due to ongoing product development, specification changes may result.

QUICKFIT 



The Quickfit range of exits is Australia's first choice for quality signage. Featuring cold cathode technology, the Quickfit Lumatec line up uses the only proven long life lamp in the Australian evacuation signage market. The Lumatec lamp is not only energy efficient but only needs to be replaced every 25,000 hours. The Quickfit also features a unique steel slide and connect bracket that provides strength, is compatible with all current and previous models for easy retrofit and enables quick and easy maintenance. Only the Quickfit bracket needs to be installed during fitout, which can greatly reduce damage.

The Quickfit is available in a complete range including Theatre Mask and Nexus models to cater for the entire project.

Features

- Stanilite Lumatec® cold cathode 3 year rated lamp
- BBEB electronic ballast technology
- Universal wall/ceiling mounting
- 24m viewing distance

Stanilite
LUMATEC

Quickfit Lumatec® Cold Cathode 25,000HR Standard – Pictograph

Part No.	Description
PQFVR25KSS	4W Maintained Single Sided VR 25K Hr Lamp
PQFVR25KDS	4W Maintained Double Sided VR 25K Hr Lamp

Note The above Standard Lumatec Cold Cathode Quickfits® include all Pictograph insert options.

Quickfit Lumatec® Cold Cathode 25,000HR Theatre Mask – Pictograph

PQFBVR25K-0001	4W Maintained T/Mask Single Sided VR 25K Hr Lamp, PICTO Diffuser
PQFBVR25K-0002	4W Maintained T/Mask Single Sided VR 25K Hr Lamp, <PICTO Diffuser
PQFBVR25K-0003	4W Maintained T/Mask Single Sided VR 25K Hr Lamp, PICTO> Diffuser
PQFBVR25K-0005	4W Maintained T/Mask Double Sided VR 25K Hr Lamp, PICTO Diffuser
PQFBVR25K-0006	4W Maintained T/Mask Double Sided VR 25K Hr Lamp, AOW PICTO Diffuser

Note Theatre Mask range does not use inserts. Theatre mask exits do not have an emergency classification.



PICTO
Straight from here



<PICTO
Left from here



PICTO>
Right from here

Exit Inserts

Lumatec Cold Cathode Standard Pictograph Quickfits® are supplied with all Pictograph insert options. For EXIT Insert Peel off Arrow, see below table:

Part No.	Description
29-E1-10	EXIT Insert Peel off Arrow 10 Pack

Technical Specifications

Photometrics & Luminaires Spacings											
Product	Classification		Mounting Height in Metres								
			2.1	2.4	2.7	3.0	3.3	3.6	4.0	4.5	5.0
PQFVR25KSS	C0	E1.25		5.2	5.2	5.4	5.2	5.0	4.6	4.8	4.0
	C90	E1.25	4.2	4.2	4.0	3.6	4.0	3.0			
PQFVR25KDS	C0	E2.5	5.6	5.8	5.8	6.0	5.8	5.8	5.2	5.2	4.6
	C90	E2.5	5.2	5.2	5.4	5.2	5.0	4.6	4.8	4.0	

Note Under AS2293.1-2005, exit signs shall be mounted not less than 2m and not more than 2.7m above floor level, or immediately above the doorway if the doorway is higher than 2.7m. However, variations to these heights shall be allowed when specifically agreed by the relevant regulatory authority.



Power Consumption

240V AC 50HZ	
• 4W Quickfit Lumatec Exit	7.6W

Construction

• Body	Moulded ABS
• Bracket	Zinc Steel – White Powder Coated
• Diffuser	Moulded Acrylic

Dimensions

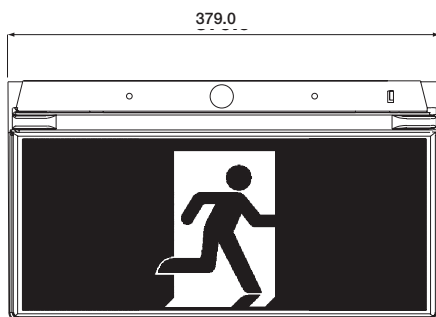

Single Sided – Double
Sided dimensions are
the same

Parts & Accessories

Part No.	Description
Bodies	
MOFVR25KMQ-0010	Quickfit Lumatec CC 25K no diffuser or back plate
MOFVR25KMQ-0011	Quickfit Lumatec CC 25K no diffuser
PQFBVR25K-0010	Quickfit T/Mask Lumatec CC 25K no diffuser or back plate
PQFBVR25K-0011	Quickfit T/Mask Lumatec CC 25K no diffuser
Diffusers	
31-PQFCC	Quickfit Lumatec CC Pictograph diffuser – includes PICTO insert
31-PQFCC-B	Quickfit Lumatec CC Pictograph diffuser – no insert
31-PQFT1	Quickfit 10W theatre mask PICTO diffuser
31-PQFT2	Quickfit 10W theatre mask <PICTO diffuser
31-PQFT3	Quickfit 10W theatre mask PICTO> diffuser
Back plates	
31-MQBP	Back plate to suit Quickfit standard
31-MQBPB	Back plate to suit Quickfit theatre
Wire guards	
QFWGCM	Quickfit wire guard ceiling mount
QFWGWM	Quickfit wire guard wall mount
Mounting Bracket	
03-02060	Ceiling bracket assembly white powder coated
03-02061	Ceiling bracket assembly black powder coated
MQFCL	Cantilever mounting bracket
Lamps	
CCFL4-5	Lumatec 4W lamp to suit Cold Cathode Quickfits – pack of 5
Batteries	
03-01205	Battery 6 cell sub C to suit VR25K Quickfits



MQFCL Bracket

Thomas & Betts emergency lighting products are tested to comply with AS2293 and meet relevant Australian EMC Standards. Due to ongoing product development, specification changes may result.

QUICKFIT®



The Quickfit range of exits is Australia's first choice for quality signage. Featuring cold cathode technology, the Quickfit Lumatec line up uses the only proven long life lamp in the Australian evacuation signage market. The Lumatec lamp is not only energy efficient but only needs to be replaced every 50,000 hours. The Quickfit also features a unique steel slide and connect bracket that provides strength, is compatible with all current and previous models for easy retrofit and enables quick and easy maintenance. Only the Quickfit bracket needs to be installed during fitout, which can greatly reduce damage.

The Quickfit is available in a complete range including Theatre Mask and Nexus models to cater for the entire project.

Features

- Stanilite Lumatec® Cold Cathode 6 year rated lamp
- BBEB electronic ballast technology
- Advanced dual rate battery charger with high temperature NiCad batteries
- Universal wall/ceiling mounting
- 24m viewing distance



Stanilite
LUMATEC®

Quickfit Lumatec® Cold Cathode 50,000HR Standard

Part No.	Description
MQFDR50KSS	4W Maintained Single Sided DR 50K HR Lamp, EXIT Insert Peel off Arrow
MQFDR50KDS	4W Maintained Double Sided DR 50K HR Lamp, EXIT Insert Peel off Arrow

Quickfit Lumatec® Cold Cathode 50,000HR Theatre Mask

MQFBDR50KMOT-1	4W Maintained T/Mask Single Sided DR 50K Hour Lamp, EXIT
MQFBDR50KMOT-2	4W Maintained T/Mask Single Sided DR 50K Hour Lamp <EXIT
MQFBDR50KMOT-3	4W Maintained T/Mask Single Sided DR 50K Hour Lamp EXIT>
MQFBDR50KMOT-4	4W Maintained T/Mask Single Sided DR 50K Hour Lamp <EXIT>
MQFBDR50KMOT-5	4W Maintained T/Mask Double Sided DR 50K Hour Lamp EXIT
MQFBDR50KMOT-6	4W Maintained T/Mask Double Sided DR 50K Hour Lamp AOW EXIT
MQFBDR50KMOT-7	4W Maintained T/Mask Double Sided DR 50K Hour Lamp <EXIT>

Note Theatre mask range does not use inserts. Theatre mask exits do not have an emergency classification.

Quickfit Lumatec® Cold Cathode 50,000HR Standard Nexus®

Stanilite
nexusLX®

Part No.	Description
MQFNXSDR50KSS	Nexus 4W Maintained Single Sided DR 50K HR Lamp EXIT Insert Peel off Arrow
MQFNXSDR50KDS	Nexus 4W Maintained Double Sided DR 50K HR Lamp EXIT Insert Peel off Arrow

Quickfit Lumatec® Cold Cathode 50,000HR Theatre Mask Nexus®

Part No.	Description
MOFBNXSDR50KT-1	Nexus 4W Maintained T/Mask Single Sided DR 50K Hour Lamp, EXIT
MOFBNXSDR50KT-2	Nexus 4W Maintained T/Mask Single Sided DR 50K Hour Lamp, <EXIT
MOFBNXSDR50KT-3	Nexus 4W Maintained T/Mask Single Sided DR 50K Hour Lamp, EXIT>
MOFBNXSDR50KT-4	Nexus 4W Maintained T/Mask Single Sided DR 50K Hour Lamp, <EXIT>
MOFBNXSDR50KT-5	Nexus 4W Maintained T/Mask Double Sided DR 50K Hour Lamp, EXIT
MOFBNXSDR50KT-6	Nexus 4W Maintained T/Mask Double Sided DR 50K Hour Lamp, AOW EXIT
MOFBNXSDR50KT-7	Nexus 4W Maintained T/Mask Double Sided DR 50K Hour Lamp, <EXIT>

Note Theatre mask range does not use inserts. Theatre mask exits do not have an emergency classification.

Technical Specifications

Photometrics & Luminaires Spacings												
Product	Classification		Mounting Height in Metres									
			2.1	2.4	2.7	3.0	3.3	3.6	4.0	4.5	5.0	6.0
MQFDR50KSS	C0	E2	5.2	5.2	5.4	5.2	5.0	4.6	4.8	4.0		
	C90	E1.25	4.2	4.2	4.0	3.6	4.0	3.0				
MQFDR50KDS	C0	E2.5	5.6	5.8	5.8	6.0	5.8	5.8	5.2	5.2	4.6	
	C90	E2	5.2	5.2	5.4	5.2	5.0	4.6	4.8	4.0		

*Nexus versions of the above have the same data

Note Under AS2293.1-2005, exit signs shall be mounted not less than 2m and not more than 2.7m above floor level, or immediately above the doorway if the doorway is higher than 2.7m. However, variations to these heights shall be allowed when specifically agreed by the relevant regulatory authority.


Power Consumption

240V AC 50HZ	
• 4W Quickfit Lumatec Exit	6.6W
• 4W Quickfit Lumatec Nexus Exit	7.2W

Construction

• Body	Moulded ABS
• Bracket	Zinc Steel – Powder Coated
• Diffuser	Moulded Acrylic

Dimensions

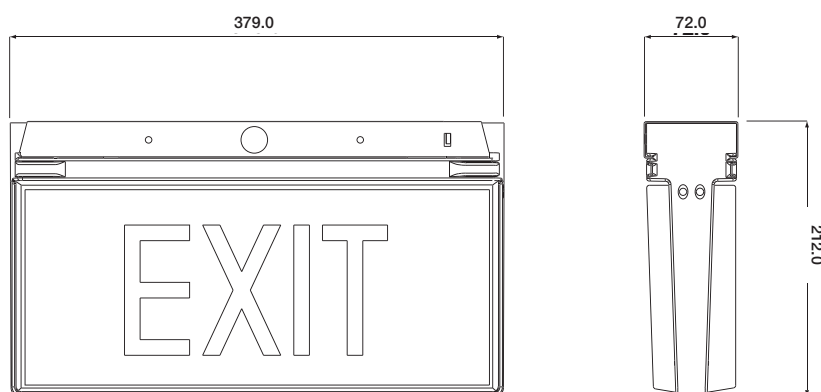

Single Sided – Double sided same dimensions

Parts & Accessories

Part No.	Description
Bodies	
MQFDR50KMQ-0010	Quickfit Lumatec CC 50K Exit no diffuser or back plate
MQFDR50KMQ-0011	Quickfit Lumatec CC 50K Exit no diffuser
MQFBDR50KMQT-10	Quickfit 4W T/Mask Lumatec CC 50K no diffuser or back plate
MQFBDR50KMQT-11	Quickfit 4W T/Mask Lumatec CC 50K no diffuser
MQFNXSD50KMQ-10	Quickfit Lumatec CC 50K Nexus Exit no diffuser or back plate
MQFNXSD50KMQ-11	Quickfit Lumatec CC 50K Nexus Exit no diffuser
MQFBNXSD50KT-10	Quickfit Nexus 4W T/Mask Lumatec CC 50K no diffuser or back plate
MQFBNXSD50KT-11	Quickfit Nexus 4W T/Mask Lumatec CC 50K no diffuser
Diffusers	
31-MQPO	Quickfit Lumatec CC diffuser – EXIT Peel off Arrow
31-MQ1	Quickfit Lumatec CC diffuser – screened EXIT
31-MQ2	Quickfit Lumatec CC diffuser – screened <EXIT
31-MQ3	Quickfit Lumatec CC diffuser – screened EXIT>
31-MQ4	Quickfit Lumatec CC diffuser – screened <EXIT>
31-MQ9	Quickfit Lumatec CC opal diffuser – no insert
31-MQ1-U	Quickfit Lumatec CC diffuser – EXIT up side down
31-MQ2-U	Quickfit Lumatec CC diffuser – <EXIT up side down
31-MQ3-U	Quickfit Lumatec CC diffuser – EXIT> up side down
31-MQT1	Quickfit Lumatec CC theatre mask diffuser – laser cut EXIT
31-MQT2	Quickfit Lumatec CC theatre mask diffuser – laser cut <EXIT
31-MQT3	Quickfit Lumatec CC theatre mask diffuser – laser cut EXIT>
31-MQT4	Quickfit Lumatec CC theatre mask diffuser – laser cut <EXIT>
31-MQBF	Breakfront diffuser single sided EXIT
Back Plates	
31-MQBP	Back plate to suit Quickfit standard
31-MQBPB	Back plate to suit Quickfit theatre
Wire Guards	
QFWGCM	Quickfit wire guard ceiling mount
QFWGWM	Quickfit wire guard wall mount
Mounting Bracket	
03-02060	Ceiling bracket assembly white powder coated
03-02061	Ceiling bracket assembly black powder coated
MQFCL	Cantilever mounting bracket
Lamps	
CCFL4-5	Lumatec 4W lamp to suit Cold Cathode Quickfits – pack of 5
Batteries	
03-01205	Battery 6 cell sub C to suit DR50K Quickfits



Note 31-MQBF does not comply with Australian Standard AS2293

Thomas & Betts emergency lighting products are tested to comply with AS2293 and meet relevant Australian EMC Standards. Due to ongoing product development, specification changes may result.

QUICKFIT®



The Quickfit range of exits is Australia's first choice for quality signage. Featuring cold cathode technology, the Quickfit Lumatec line up uses the only proven long life lamp in the Australian evacuation signage market. The Lumatec lamp is not only energy efficient but only needs to be replaced every 25,000 hours. The Quickfit also features a unique steel slide and connect bracket that provides strength, is compatible with all current and previous models for easy retrofit and enables quick and easy maintenance. Only the Quickfit bracket needs to be installed during fitout, which can greatly reduce damage.

The Quickfit is available in a complete range including Theatre Mask and Nexus models to cater for the entire project.

Features

- Stanilite Lumatec® cold cathode 3 year rated lamp
- BBEB electronic ballast technology
- Advanced dual rate battery charger with high temperature NiCad batteries
- Universal wall/ceiling mounting
- 24M viewing distance



Stanilite
LUMATEC®

Quickfit Lumatec® Cold Cathode 25,000HR Standard

Part No.	Description
MQFVR25KSS	4W Maintained, Single Sided VR 25K Hour Lamp, EXIT Insert Peel of Arrow
MQFVR25KDS	4W Maintained, Double Sided VR 25K Hour Lamp, EXIT Insert Peel of Arrow

Quickfit Lumatec® Cold Cathode 25,000HR Theatre Mask

MQFBVR25KMOT-1	4W Maintained T/Mask Single Sided VR 25K Hour Lamp, EXIT
MQFBVR25KMOT-2	4W Maintained T/Mask Single Sided VR 25K Hour Lamp, <EXIT
MQFBVR25KMOT-3	4W Maintained T/Mask Single Sided VR 25K Hour Lamp EXIT>
MQFBVR25KMOT-4	4W Maintained T/Mask Single Sided VR 25K Hour Lamp <EXIT>
MQFBVR25KMOT-5	4W Maintained T/Mask Double Sided VR 25K Hour Lamp EXIT
MQFBVR25KMOT-6	4W Maintained T/Mask Double Sided VR 25K Hour Lamp AOW EXIT
MQFBVR25KMOT-7	4W Maintained T/Mask Double Sided VR 25K Hour Lamp <EXIT>

Note Theatre mask range does not use inserts. Theatre mask exits do not have an emergency classification.

Technical Specifications

Photometrics & Luminaires Spacings


Product	Classification	Mounting Height In Metres									
		2.1	2.4	2.7	3.0	3.3	3.6	4.0	4.5	5.0	6.0
MQFVR25KSS	C0 E2	5.2	5.2	5.4	5.2	5.0	4.6	4.8	4.0		
	C90 E1.25	4.2	4.2	4.0	3.6	4.0	3.0				
MQFVR25KDS	C0 E2.5	5.6	5.8	5.8	6.0	5.8	5.8	5.2	5.2	4.6	
	C90 E2	5.2	5.2	5.4	5.2	5.0	4.6	4.8	4.0		

Note Under AS2293.1-2005, exit signs shall be mounted not less than 2m and not more than 2.7m above floor level, or immediately above the doorway if the doorway is higher than 2.7m. However, variations to these heights shall be allowed when specifically agreed by the relevant regulatory authority.

Power Consumption

240V AC 50HZ	
• 4W Quickfit Lumatec Exit	7.6W

Dimensions

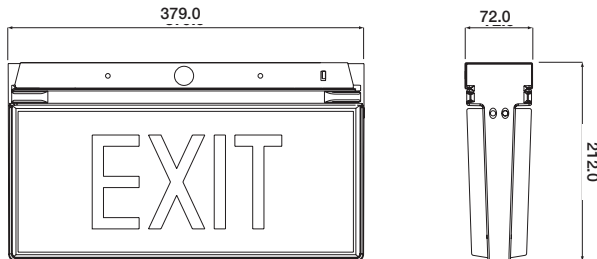

Single Sided - Double sided
are the same dimensions

Construction

• Body	Moulded ABS
• Bracket	Zinc Steel – Powder Coated
• Diffuser	Moulded Acrylic

Parts & Accessories

Part No.	Description
Bodies	
MQFVR25KMQ-0010	Quickfit Lumatec CC 25K Exit no diffuser or back plate
MQFVR25KMQ-0011	Quickfit Lumatec CC 25K Exit no diffuser
MQFBVR25KMOT-10	Quickfit T/Mask Lumatec CC 25K no diffuser or back plate
MQFBVR25KMOT-11	Quickfit T/Mask Lumatec CC 25K no diffuser
Diffusers & Back Plates	
31-MQPO	Quickfit Lumatec CC diffuser – EXIT Peel off Arrow
31-MQ1	Quickfit Lumatec CC diffuser – screened EXIT
31-MQ2	Quickfit Lumatec CC diffuser – screened <EXIT
31-MQ3	Quickfit Lumatec CC diffuser – screened EXIT>
31-MQ4	Quickfit Lumatec CC diffuser – screened <EXIT>
31-MQ9	Quickfit Lumatec CC opal diffuser – no insert
31-MQ1-U	Quickfit Lumatec CC diffuser – EXIT up side down
31-MQ2-U	Quickfit Lumatec CC diffuser – <EXIT up side down
31-MQ3-U	Quickfit Lumatec CC diffuser – EXIT> up side down
31-MQT1	Quickfit Lumatec CC theatre mask diffuser – laser cut EXIT
31-MQT2	Quickfit Lumatec CC theatre mask diffuser – laser cut <EXIT
31-MQT3	Quickfit Lumatec CC theatre mask diffuser – laser cut EXIT>
31-MQT4	Quickfit Lumatec CC theatre mask diffuser – laser cut <EXIT>
31-MQBF	Breakfront diffuser single sided EXIT
31-MQBP	Back plate to suit Quickfit standard
31-MQBPF	Back plate to suit Quickfit theatre
Wire Guards	
QFWGCM	Quickfit wire guard ceiling mount
QFWGWM	Quickfit wire guard wall mount
Mounting Bracket	
03-02060	Ceiling bracket assembly white powder coated
03-02061	Ceiling bracket assembly black powder coated
MQFCL	Cantilever mounting bracket
Lamps & Batteries	
CCFL4-5	Lumatec 4W lamp to suit Cold Cathode Quickfits – pack of 5
03-01205	Battery 6 cell sub C to suit VR25K Quickfits



Thomas & Betts emergency lighting products are tested to comply with AS2293 and meet relevant Australian EMC Standards. Due to ongoing product development, specification changes may result.