

[AURA]

LED FLOODLIGHT



3
YEAR
PRODUCT
WARRANTY

**IP
65**
INGRESS
PROTECTION

**IK
07**
IMPACT
PROTECTION

S
SENSE
TECHNOLOGY

Description

The [AURA] LED Floodlight provides superior area lighting in a variety of unit sizes and wattages. Sleek and slim design makes it quick and easy to install across any commercial or residential application.

Key Features

- Slim design for easy installation
- High quality powder coated finish
- Swivel bracket for versatile mounting
- Integrated breather vents to prevent condensation
- User-friendly installation with flex and plug



Flexible Installation


Adjustable <180° bracket for flexible installation.

Technical Specifications

Rated Life	≥30,000 hours
Body	Powder-coated aluminium
Installation	Adjustable bracket
Beam Angle	120°
Power Factor	>0.98, >0.55 (10W, 20W)
CRI	>80

Operating Temperature	-20°C to +40°C
Input Voltage	220-240 VAC ~ 50/60Hz
IP Rating	IP65
Connection	Flex and plug (1m)
IK Rating	IK07

Dimensional Drawing

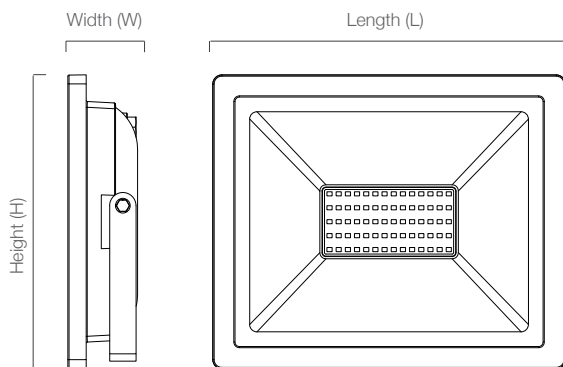

Wattage	L	W	H
10W	89	75	30
20W	136	115	36
30W	186	156	45
50W	240	200	47
100W	277	231	49
150W	312	260	49

Unit = mm

Product Data

Part Number	Power	Lumen Output	CCT	Weight
FA-10D120A*	10W	950lm	5000K	0.37kg
FA-20D120A*	20W	1,900lm	5000K	0.59kg
FA-30D120A*	30W	2,850lm	5000K	0.98kg
FA-50D120A*	50W	4,750lm	5000K	1.53kg
FA-100D120A	100W	9,500lm	5000K	2.1kg
FA-150D120A	150W	14,250lm	5000K	2.58kg

* = Sensor model available via special order