

[PRIME]

GEN 3 LED HIGHBAY



Description

The [PRIME] GEN 3 LED Highbay is a blend of high efficacy and robust construction, ideal for premium and industrial applications. With its custom lensing for glare reduction and improved light throw, its dust-resistant unique heat sink, and a 10-year warranty, the [PRIME] is a true best-in-class luminaire.



Key Features

- Efficacy up to 180lm/W
- Low glare UGR<25
- Durable design
- Unique design to reduce dust build up

ACCESSORIES



Microwave Motion Sensor



Remote Control
for Microwave Motion Sensor




Ceiling Mount Bracket


Technical Specifications

Rated Life	≥131,000 hours	Operating Temperature	-30°C to +50°C
Body	Powder Coated Aluminium Alloy	Input Voltage	100 - 240 VAC ~ 50/60Hz
Installation	Suspension Mount / Ceiling Mount	IP Rating	IP65
Beam Angle	90° / 120°	Connection	Flex & Plug
Power Factor	>0.95	Weight	3.3kg
CRI	>Ra70		


Dimensional Drawing




Without Sensor



Photometry

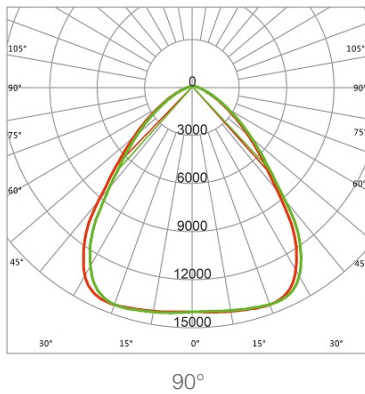

90°

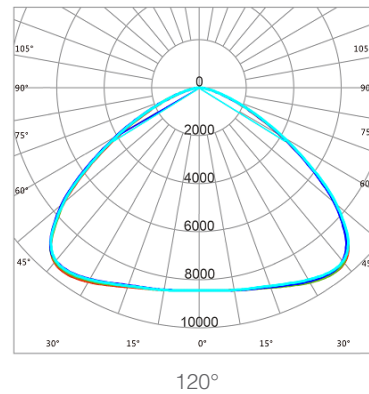

120°

Product Data

Part Number	Power	Lumen Output	CCT
HP-85D90-G3, HP-85D120-G3	85W	15,000lm	5000K
HP-115D90-G3, HP-115D120-G3	115W	21,000lm	5000K
HP-180D90-G3, HP-180D120-G3	180W	32,400lm	5000K
HP-85D90-SG3, HP-85D120-SG3	85W	15,000lm	5000K
HP-115D90-SG3, HP-115D120-SG3	115W	21,000lm	5000K
HP-180D90-SG3, HP-180D120-SG3	180W	32,400lm	5000K