

96270781 FLEX 24L50 SYM CL2 W5M D76 L730 ANT

LED 40W LED_FLEX_3350		IP66	IK09		T _a -20 +25
-----------------------	---	------	------	---	---------------------------


FleXity

A modern, discreet and versatile post top LED lantern with a symmetric distribution. Electronic, LED control gear driving 24 LEDs at 500mA. Compatible with DALI, 1-10V, RF, Power Line, Minicell, Nema, Presence Detection. Class II electrical, IP66, IK09. Canopy and base: die-cast aluminium (EN AC-46100) powder coated dark grey (close to RAL 7043). Enclosure: clear polycarbonate. Complete with 3000K LED. Post top mounting to Ø76mm column, maximum spigot length 75mm. Pre-wired with 5m cable.


Dimensions: 370 x 430 x 290 mm
 Total power: 40 W
 Luminaire luminous flux: 3350 lm
 Luminaire efficacy: 84 lm/W
 Weight: 4.7 kg
 Scx: 0.038 m²



TLG_FLEX_F_D76PDB.jpg

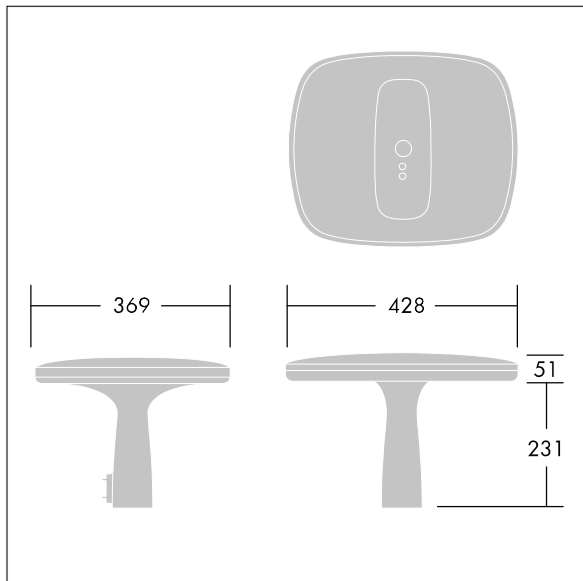

TLG_FLEX_M_LD1.wmf

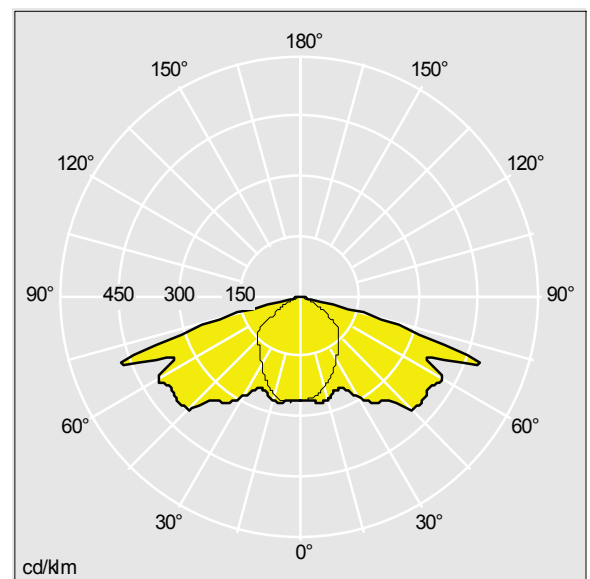

TLG_SP_0042016.idt

Lamp position: STD - standard
 Light Source: LED
 Total luminous flux*: 3350 lm
 Luminaire efficacy*: 84 lm/W
 Lamp efficacy: 84 lm/W
 Colour Rendering Index min.: 70


Correlated colour temperature*: 3000 Kelvin
 Rated median useful life*: 100000h L80 at 25°C
 Ballast: 1x EL2 CoolLED
 Luminaire input power*: 40 W
 Dimming: DIM_LED
 LOR: 1,00 ULOR: 0,00 DLOR: 1,00

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Colour temperature is subject to a tolerance of up to ± 150 Kelvin from the nominal value. Unless stated otherwise, the values apply to an ambient temperature of 25°C.


In most products the failure of one LED point causes no functional impairment to the lighting performance of the luminaire and is therefore no reason for complaint.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
 © Thorn Lighting

96270781 FLEX 24L50 SYM CL2 W5M D76 L730 ANT

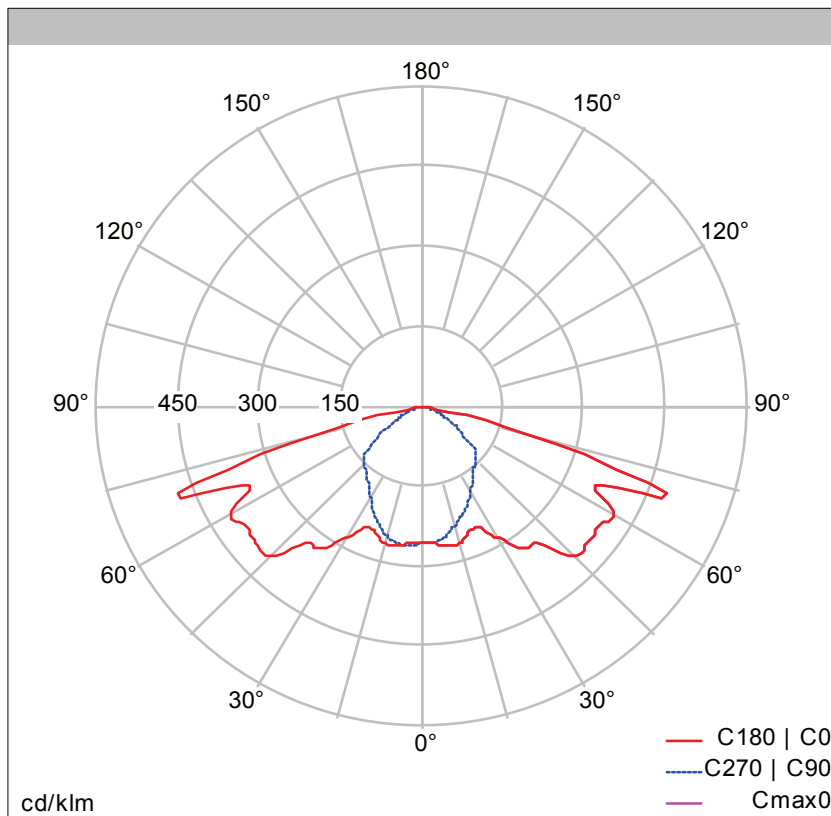


Description	FLEXITY 24L50 SYM CL2 W5W D60 L730 (96270773) - 500mA
Measurement	TLG_SP_0042016
Lamps	1 x LED Module Oslon x2 3350
Lamp adjustment	
IP	

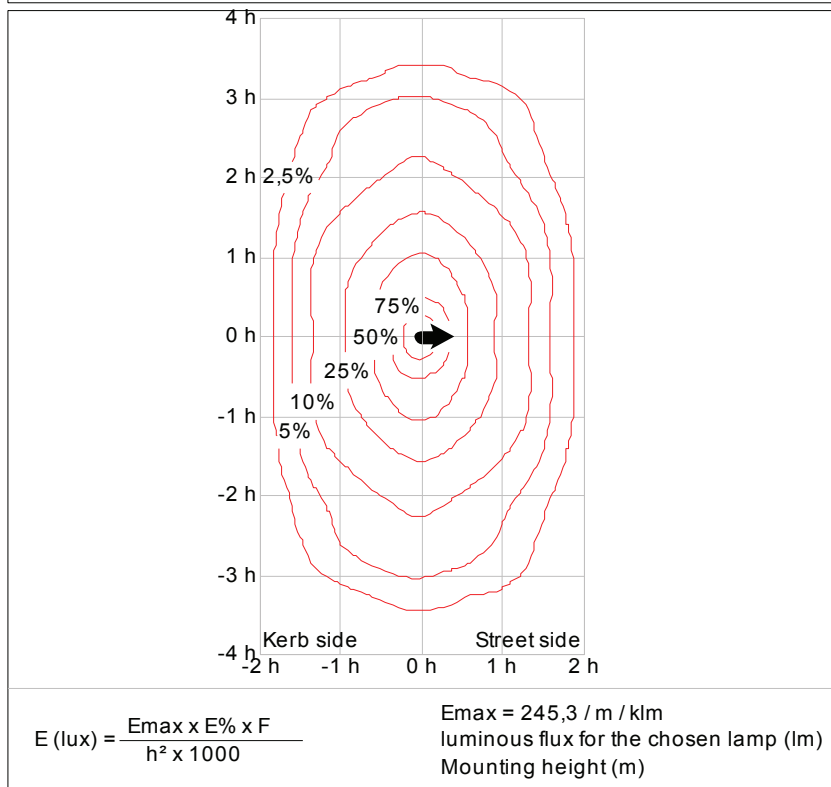

Photometric data file: TLG_SP_0042016.ltd

Luminaire design attitude

Tilt: $\alpha = 0.0^\circ$

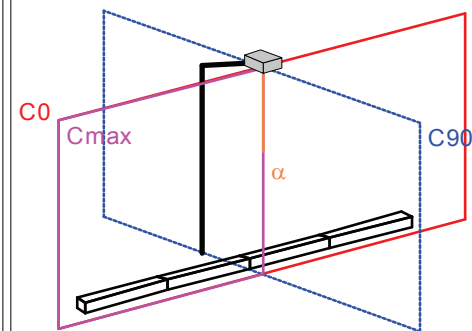

Maximum intensity


I_{max}	477 cd/klm
C_{max}	0°
γ_{max}	70°

Light Output Ratio

Luminaire design attitude	0.0°
LOR	100.00
ULOR	0.00
DLOR	100.00


Upward light output ratio

3% for a tilt = 31°	5% for a tilt = 36°
10% for a tilt = 45°	15% for a tilt = 52°
20% for a tilt = 59°	25% for a tilt = 65°

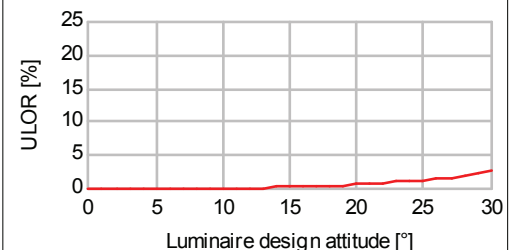

Utilization Factors

0.5H = 0.26	1H = 0.39	2H = 0.47
Kerb side		Street side

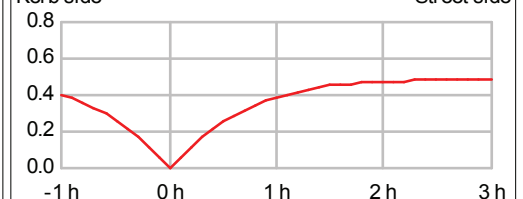

Glare restriction Obtrusive light

Luminous intensity class G4

γ	Meas. Data I_{max} in cd/klm	Specified in EN 13201-2
70°	477	500
80°	36	100
90°	0	10
$>95^\circ$	0	0