




ECONOLED ER73

7 Watts / 865 Lumens / 85+ CRI



7W Recessed low glare LED downlight suitable for the replacement of existing low voltage MR16 downlights. Powered by a high output COB LED with high lumen outputs of 850 lm (3000K) and 865 lm (4000K) with a wide beam angle and a high CRI of 85+. Supplied with remote driver.

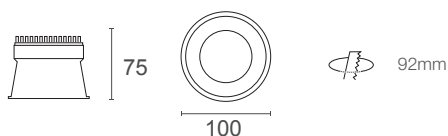

System Power 8.2W

Cut-Out 92mm

LED Power 7W

Weight 175g

IP Rating IP44

	3000K	4000K
COB Lumen Output	850 lm	865 lm
Total Luminous Flux	573 lm	588 lm

Efficacy	71.70 lm/W 4000K	Lifetime	50,000hrs (L70)
Dimming	Leading + Trailing Edge		
Input Voltage	100V - 240V AC 50/60 Hz	Protection	Thermal and Short Circuit
		Power Factor	> 0.95



Optional heatsink cover for IC-F rating.

Product	Description	Product	Description
ER731	Econoled 3000K White Trim	ER735	Econoled 3000K Black Trim
ER732	Econoled 4000K White Trim	ER736	Econoled 4000K Black Trim
ER733	Econoled 3000K White Trim IC-F Cap	ER737	Econoled 3000K Black Trim IC-F Cap
ER734	Econoled 4000K White Trim IC-F Cap	ER738	Econoled 4000K Black Trim IC-F Cap



TREND
LIGHT BY SOLID STATE

Level 3, 290-292 Coward Street, Mascot, NSW, 2020
Ph: (02) 9669 8888 Fax: (02) 9669 8899 Email: sales@trendlighting.com.au