

Up to 525 watt

WST-NGX-D3

N-Type Bifacial Glass-Glass Series

Higher yield solar panel design for a wide range of utility applications



PERFORMANCE WARRANTY



COMPLIMENTARY INSURANCE





Power to Perform




www.winaico.com.au


DIMENSIONS

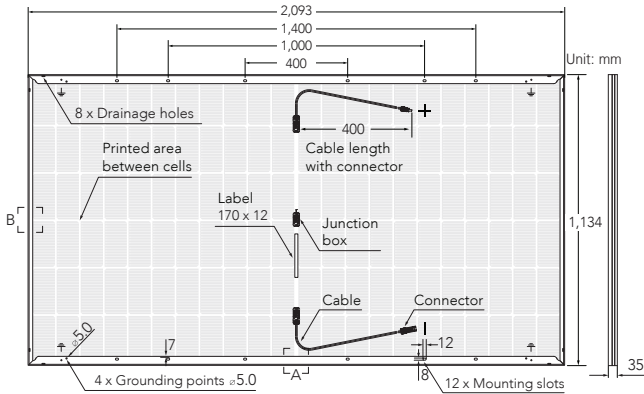

Frame cross section A



Frame cross section B



Mounting slot

PACKAGING



2,143 mm



1,145 mm



1,257 mm



31 modules



982 kg




22 pallets

MECHANICAL DATA WINAICO WST-NGX-D3 SERIES

Cell	Monocrystalline, N-type, bifacial
Quantity and wiring of cells	132 (6 strings x 22 cells)
Bifaciality	Up to 80 %
Dimensions	2,093 x 1,134 x 35 mm (82.40 x 44.65 x 1.38 in)
Weight	29.7 kg (65.48 lbs)
Front-side glass	2.0 mm, tempered solar glass with anti-reflective coating
Back-side glass	2.0 mm, tempered solar glass, partially white printed
Encapsulant material	POE
Frame	Black anodised aluminium
Junction box	IP68, 3 bypass diodes
Connector type	QC4.10 IP68
Cable length (IEC/UL)	Cable 2 x 0.4 m / 4 mm ²
Fire safety class ⁴ (IEC61730)	C
Protection class (IEC 61140)	II

WINAICO PERFORMANCE GUARANTEE

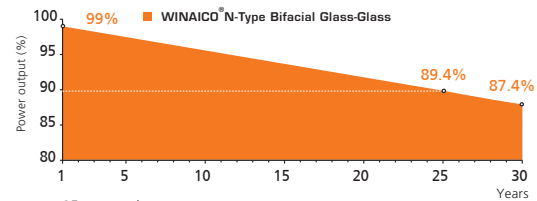

25-year product warranty.
Linear performance guarantee for 30 years.
No more than 0.4% degradation per year from 2nd year to 30th year.

Operating conditions

Operating temperature

Maximum system voltage IEC/UL

Maximum series fuse

Maximum design load (push/pull)

Maximum test load (push/pull)

Nominal module operating temperature NMOT

Temperature coefficient of P_{MAX}

Temperature coefficient of V_{OC}

Temperature coefficient of I_{SC}

Certifications

WINAICO WST-NGX-D3

-40 °C to +85 °C / -40 °F to +185 °F

1,500V/1,500V

30 A

3,600Pa/1,600Pa

5,400Pa/2,400Pa

42 ± 2 °C

-0.30%/°C

-0.25%/°C

0.045%/°C

IEC 61215-1:2016, IEC 61215-2:2016, IEC 61730-1:2016, IEC 61730-2:2016

Electrical data (STC)¹

Nominal performance

P_{MAX}

525

Wp

Voltage at maximum performance

V_{MP}

39.84

V

Current at maximum performance

I_{MP}

13.18

A

Open circuit voltage

V_{OC}

47.22

V

Short circuit current

I_{SC}

13.81

A

Module efficiency

22.10

%

Bifacial gain³

10 % Pmpp

577.5(+53)

W

*Depending on irradiation conditions

15 % Pmpp

603.75(+79)

W

20 % Pmpp

630(+105)

W

Power tolerance

0~+5W

W

Electrical data (NMOT)²

Nominal performance

P_{MAX}

392

Wp

Voltage at maximum performance

V_{MP}

44.61

V

Current at maximum performance

I_{MP}

11.14

A

Open circuit voltage

V_{OC}

37.64

V

Short circuit current

I_{SC}

10.42

A

1. Electrical data applies under standard test conditions (STC): solar radiation 1,000W/m² with light spectrum AM 1.5, with cell temperature 25°C. Measurement tolerance of P_{MAX} at STC: ±3%. Accuracy of other electrical data: ±10%.

2. Electrical data applies under Nominal Module Operating Temperature (NMOT), irradiance of 800 W/m², spectrum AM 1.5, ambient temperature 20°C, wind speed 1 m/s.

3. The additional power gain from the rear side depends on the irradiance conditions at the installation site and the mounting situation.

4. The fire safety test methods according to IEC 61730-2:2016 Annex B, Fire Tests of Roof Coverings.



WINAICO Australia Pty Ltd

Tel + 61 2 8091 2771

australia@winaico.com

<https://www.winaico.com.au/>

3/393 George Street, Sydney NSW 2000, Australia



WINAICO is a trademark of
Win Win Precision Technology Co., Ltd.

Win Win Precision Technology Co., Ltd

Tel + 886 3 568 8699 · info@w-win.com.tw

www.wvpt.com.tw · www.winaico.com

4F., No. 180, Sec. 2, Gongdao 5th Rd., East Dist.,

Hsinchu City 300, Taiwan R.O.C.

Made in China