
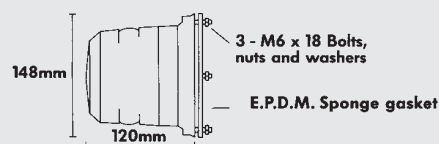


RB Series

- 3 point or magnetic mounting
- Dual voltage 12/24V versions
- Multi-voltage versions for battery powered vehicles
- High efficiency
- Application – commercial vehicles, service vehicles, materials handling, and cleaning machines

Specifications:

Protection:	IP65
Temp rating (°C):	-20 to +55
Cable entry:	Through base
Construction:	ABS base, polycarbonate lens
Weight:	0.4Kg

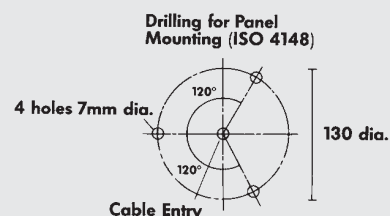

Order Code	Model	Voltage	Current	Flash Energy	Light Output	Flash Rate
DLR401206*	RB4XDV/6	10-32VDC	300-600mA	4J	>50Cd (e)	75fpm
DLR401206*MAG	RB4XDV/6MAG	10-32VDC	300-600mA			
DLR201215*	RB2XDV/15	10-33VDC	0.75-1.5A	6.0 J	>60Cd (e)	125fpm
DLR401002*	RB4XMV/2P	10-100VDC 30-60VAC	145-40mA	1.5 J	>18Cd (e)	75fpm
DLR401005*	RB4XMV/5	10-100VDC 30-60VAC	360-60mA	4.0 J	>44Cd (e)	75fpm

*Specify colour A = Amber, B = Blue, G = Green, R = Red


EL Series

- 3 point or magnetic mounting
- Dual voltage 12/24V versions
- High efficiency
- Double flash
- Application – commercial vehicles, service vehicles, and emergency vehicles



Specifications:

Voltage:	10-33VDC
Current:	1.5-0.75A
Flash rate:	120 fpm
Light output:	>100Cd (e)
Protection:	IP65
Temp rating (°C):	-20 to +55
Cable entry:	Through base
Construction:	ABS base, Polycarbonate lens

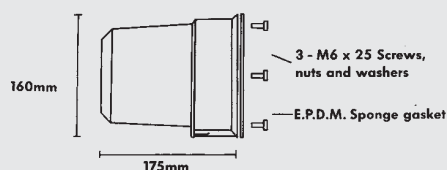

Order Code	Mounting	Weight
DLE201215A	3 point fixed	0.6Kg

*Specify colour A = Amber, B = Blue, G = Greens, R = Red

Accessories and Spare Parts

FX9



FX10



FX12



FX13



FX60



Order Code	Description
DLFX9	FX9 steel guard for RB series
DLFX10	FX10 steel guard for EL series
DLFX60	FX60 magnetic kit RB Series
DLFX11	FX11 magnetic kit EL Series
DLFX7	FX7 single bolt mount RB series
DLFX12	FX12 single bolt mount EL series
DLFX13	FX13 Pole Mount Kit RB - EL Series
DL900050	RB2XDV/15 xenon tube kit
DL900051	RB4XMV/5 xenon tube kit
DL900060	ELB2DXDV/15 Xenon tube kit
DL900030*	RB lens (*Specify colour)
DL900040*	EL lens (*Specify colour)