


HAND OPERATED SERVICE FUSES (SERVICE CUT OUTS)



- Casings are moulded from impact resistant polymers, that display excellent tracking resistance
- Heavy gauge current carrying components to ensure minimum temperature rise and optimum heat dissipation
- Simple and safe cable connection methods. The back wired version featuring screwdriver access without the need to disassemble the fuse base. The line and load terminals cannot be shorted during fit off.
- Sealing tabs designed to allow easier application of sealing wire.
- Anti Intrusion Barriers fitted to 30mm Fuse Bases for NSW.
- Queensland cut out fitted with 125A link and supplied complete with nylon screw, nut and washer.
- Available in Black and Clear. Other colours can be manufactured at additional cost.
- Manufactured in Australia, tested to comply with the requirements of IEC60269.

Part No	Type	Colour	Current Rating	Voltage Rating	Cable Range mm ²	Fuse Link	Max Power (W)	Pack Size
E1036	Back Wired	Black	100	500	4 to 35	22 x 57mm	9.5	20
E1036/C	Back Wired	Clear	100	500	4 to 35	22 x 57mm	9.5	20
E1038	Front Wired	Black	100	500	4 to 35	22 x 57mm	9.5	20
E1037/AIBB	Back Wired	Black	100	500	4 to 35	30 x 57mm	9.5	20
E1034/AIBB	Front Wired	Black	100	500	4 to 35	30 x 57mm	9.5	20
E1037/AIB	Back Wired	Clear	100	500	4 to 35	30 x 57mm	9.5	20
E1034/AIB	Front Wired	Clear	100	500	4 to 35	30 x 57mm	9.5	20
E1036/SLSS	Back Wired	Clear	125	500	4 to 35	Link	6.0	20
E1038/SLSS	Front Wired	Clear	125	500	4 to 35	Link	6.0	20
E1036/SLI	Back Wired	Clear	125	500	4 to 35	Link + Intrusion Barrier	6.0	20

HOUSE SERVICE CUT OUT DIMENSIONS

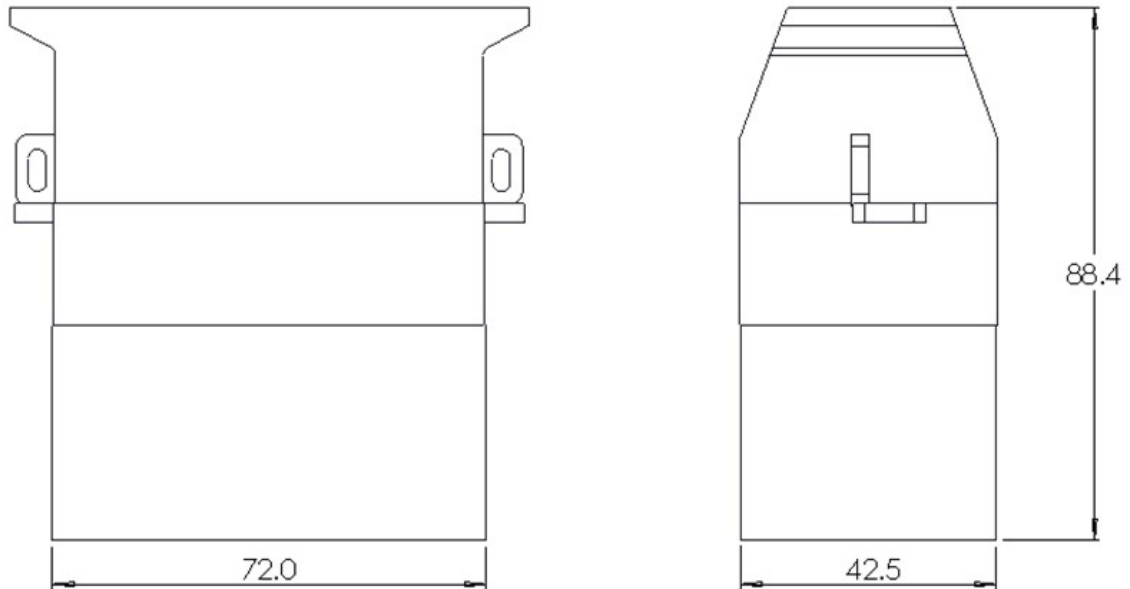

Back Wire Drilling Template

