

FLSWV1G
FLSWV2G
FLSWV3G
FLSWV4G
FLSWV5G
FLSWV6G
FLSW1G
FLSW2G
FLSW3G
FLSW4G
FLSW5G
FLSW6G

Cleaning Guide:

Spraying cleaning products directly on to electrical switches or power points (sockets) is not recommended.

It is important to ensure that switches are turned off before cleaning.


Do not use any cleaning sprays - only wipe down with damp cloth or rub with dry cloth. (Do not use an abrasive cloth as it may scratch the plastic)

Do not use harsh chemical cleaners as these can break down the plastic and cause it to crack.

Do not wash the cover plates in water over 60°C.

Flat Cat Range of Switch Plates

- Switches are rated 10AX/16A 250V~ and approved to AS/NZS3133
- Fits recessed Australian wall boxes and mounting accessories that use 84mm mounting centres
- Uses brass tunnel terminals that have the screws backed out for easier installation of cabling. Switches are two way with looping terminal and suit 4 x 1.5mm² cabling with 4.1 bore
- Slotted head screws for the terminals
- Covers, plates and dollies are made from UV stabilised polycarbonate to avoid discolouring to yellow
- Standard colour is white. Black also stocked - please check availability
- Typical example of size seen below:

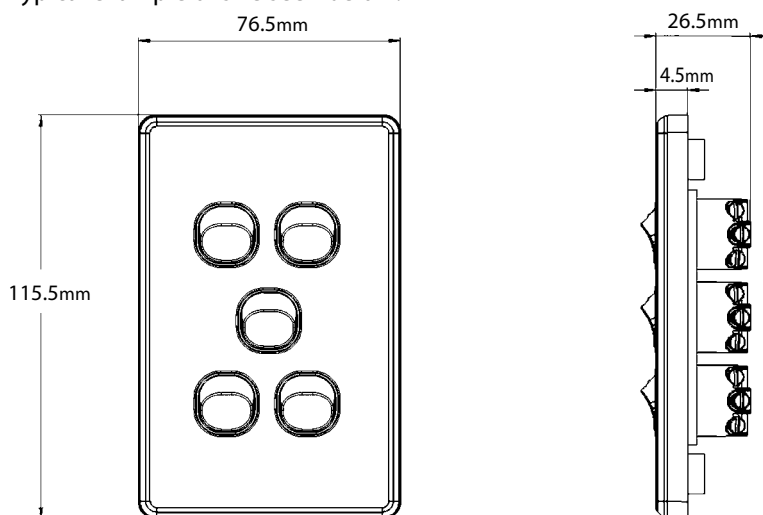

Catalogue Number	Description
FLSWV1G	Switch Vertical 1 Gang, 10AX/16A 250V~
FLSWV2G	Switch Vertical 2 Gang, 10AX/16A 250V~
FLSWV3G	Switch Vertical 3 Gang, 10AX/16A 250V~
FLSWV4G	Switch Vertical 4 Gang, 10AX/16A 250V~
FLSWV5G	Switch Vertical 5 Gang, 10AX/16A 250V~
FLSWV6G	Switch Vertical 6 Gang, 10AX/16A 250V~
FLSW1G	Switch Horizontal 1 Gang, 10AX/16A 250V~
FLSW2G	Switch Horizontal 2 Gang, 10AX/16A 250V~
FLSW3G	Switch Horizontal 3 Gang, 10AX/16A 250V~
FLSW4G	Switch Horizontal 4 Gang, 10AX/16A 250V~
FLSW5G	Switch Horizontal 5 Gang, 10AX/16A 250V~
FLSW6G	Switch Horizontal 6 Gang, 10AX/16A 250V~

**Horizontals
available
by request**

When ordering BLACK product add "BK" to end of catalogue number.

MEERKAT 

MEERKAT Switch Mechanisms are used for all switch plates.
Please refer to Meerkat Mech Matrix for range compatibility.

Certification Number: GMA-103194-EA-011

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au

www.gsme.com.au



Data Specification Sheet
November 2017