




Restrained Range 60A 660/1100V receptacle

Ordering Codes

Part Number	Description
60-40-0660	60A 660V Receptacle with 10mm ² 1.3m Tails
60-40-1100	60A 1100V Receptacle with 10mm ² 1.3m Tails
60-40-0660R	60A 660V Receptacle with 10mm ² Thimbles
60-40-1100R	60A 1100V Receptacle with 10mm ² Thimbles
60-40-0660RGB	60A 660V Receptacle with Gland & Bracket
60-40-1100RGB	60A 1100V Receptacle with Gland & Bracket

Grommet (table 1)

Part Number	Cable O.D.
60-30-1300	10-13mm
60-30-1600	13-16mm
60-30-1900	16-19mm
60-30-2200	19-22mm
60-30-2500	22-25mm
60-30-2800	25-28mm
60-30-3000	28-30mm
60-30-3300	30-33mm
60-30-3500	33-35mm
60-30-3800	35-38mm

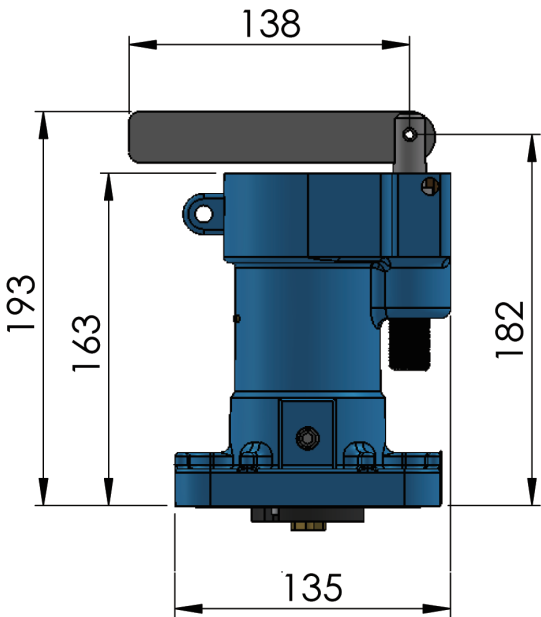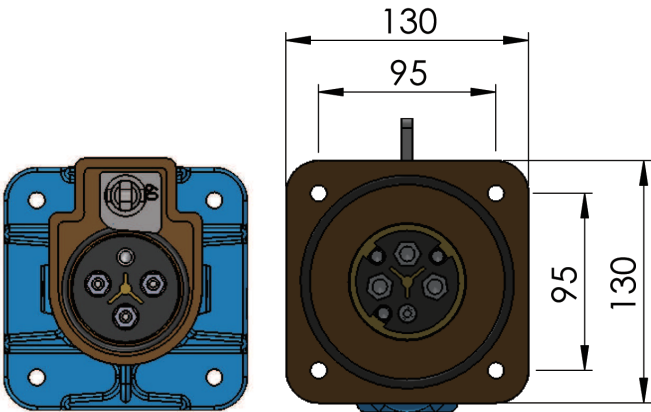

Colour and Orientation for Voltage

Material: Manganese Bronze /EPR Rubber
 Weight: Approx. 6.0kg
 Compliance: AS/NZS1299

Spare Parts

To order spare parts, please identify from exploded view drawing & refer to appropriate table

Item	Part Number	Description	QTY.
1	60-40-0001	Housing 1100V	1
	60-40-0001-OR	Housing 660V	1
2	60-40-0004R	Interior c/w Pins	1
3	60-40-9008	Main Pin	3
4	60-40-9009	Insulator	3
5	60-40-0002	Jacking Screw	1
6	60-40-9003	Dust Plug	1
7	60-30-0903	Earth Block	3
8	970-004-0010	Earth Block Screw	3
9	55-30-0009	Pilot Thimble	1
10	195-60-0040	O-Ring	1
11	195-05-0114	O-Ring	1
12	990-006-0012	Side Screw	2
13	950-604-1030-CP	Copper Washer	2

RGB Spare Parts

Item	Part Number	Description	QTY.
14	60-40-0040	RGB Housing 1100V	1
	60-40-0040-OR	RGB Housing 660V	1
15	60-30-0002	TRS Gland	1
16	60-40-0020	Bracket	1
17	195-05-0114	O-Ring	1
18	See Table 1	Grommet	1
19	990-008-0030	Gland Bolt	2
20	990-006-0012	Side Screw	3
21	300-40-0021	Earth Strap	1

