


PRODUCT DATASHEET


SPC.T FR 15 W 230 V E14

SPECIAL T/FRIDGE | Incandescent lamps, tubular shape, for fridge lighting

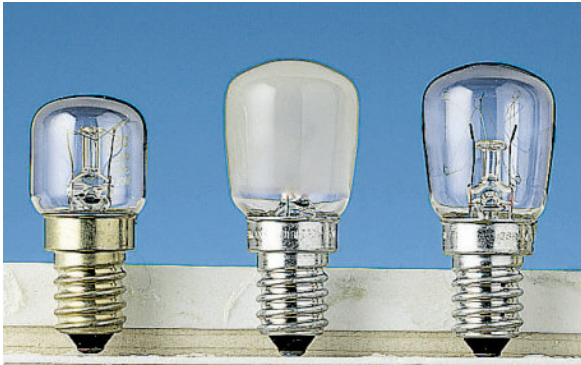

AREAS OF APPLICATION

- Domestic refrigerators
- Sewing machines



TECHNICAL DATA

Electrical data

Nominal wattage	15.00 W
Nominal voltage	230 V
Rated wattage	15.00 W
Power factor λ	1.00



Photometrical data

Luminous flux	90 lm
Nominal luminous flux	90 lm
Rated luminous flux	90 lm
Rated color temperature	2700 K
Light color (designation)	Warm White
Color temperature	2700 K
Color rendering index Ra	99
Color rendering index Ra	99


Light technical data

Starting time	0.0 s
Warm-up time (60 %)	0.00 s

Dimensions & weight



E14
IEC 7004-23



E 14

Diameter	26.0 mm
Length	55.0 mm
Overall length	57.0 mm
Outer bulb	T26
Light center length (LCL)	45.0 mm
Length with base excl. base pins/connection	57.00 mm

Lifespan

Nominal lamp life time	1000 h
Rated lamp life time	1000 h

Additional product data

Base (standard designation)	E14
Mercury content	0.0 mg
Mercury-free	Yes

Capabilities

Dimmable	Yes
----------	-----

Certificates & standards

Energy efficiency class	E
Energy consumption	15 kWh/1000h

Country-specific categorizations

ILCOS	IBT/F-15-230-E14-26
-------	---------------------

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4050300003085	Folding carton box 1	61 mm x 24 mm x 27 mm	14.60 g	0.04 dm ³
4050300555171	Bundle 10	56 mm x 63 mm x 137 mm	129.00 g	0.48 dm ³
4050300555188	Shipping carton box 100	275 mm x 141 mm x 138 mm	1490.00 g	5.35 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.