

10-15% more efficient!

MASTER PL-C 2 Pin



MASTER PL-C is an efficient medium-wattage compact fluorescent lamp, typically used in general downlights for retail, hospitality and office applications. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 2-pin version is designed for operation on electromagnetic gear and is provided with a plug-in/pull-out lamp base.

Benefits

- Optimal light performance for short or long operation per switch-on
- Multiple light color choice
- Good color rendering (CRI >80)

Features

- 2-pin base with a housing incorporating the special instant starter and capacitor
- Fluorescent tri-phosphor technology
- Low light depreciation over lamp life

Application

- Designed for general or supplementary lighting in professional or home environments
- Recessed or surface-mounted downlighters, wall units, table lamps and pendant lamps

Warnings and Safety

- Use only with electromagnetic control gear
- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position
- Dimming is not possible

Related products



10W, G24d-1, 2P



13W, G24d-1, 2P




18W, G24d-2, 2P



26W, G24d-3, 2P

Dimensional drawing

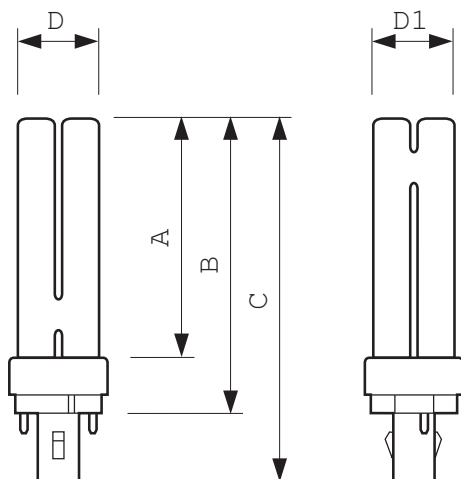

MASTER PL-C 10W/827/2P 1CT

Product	A (Max)	B (Max)	C (Max)	D (Max)	D1 (Max)
PL-C 10W/827/2P	75.7	94.0	116.4	27.1	27.1
PL-C 10W/840/2P	75.7	94.0	116.4	27.1	27.1
PL-C 10W/827/2P	75.7	94.0	116.4	27.1	27.1
PL-C 10W/827/2P	75.7	94.0	116.4	27.1	27.1
PL-C 10W/827/2P	75.7	94.0	116.4	27.1	27.1
PL-C 10W/830/2P	75.7	94.0	116.4	27.1	27.1
PL-C 10W/830/2P	75.7	94.0	116.4	27.1	27.1
PL-C 10W/830/2P	75.7	94.0	116.4	27.1	27.1
PL-C 10W/830/2P	75.7	94.0	116.4	27.1	27.1
PL-C 10W/840/2P	75.7	94.0	116.4	27.1	27.1
PL-C 10W/840/2P	75.7	94.0	116.4	27.1	27.1
PL-C 10W/840/2P	75.7	94.0	116.4	27.1	27.1
PL-C 10W/840/2P	75.7	94.0	116.4	27.1	27.1
PL-C 10W/865/2P	75.5	95.0	117.4	27.1	27.1
PL-C 10W/865/2P	75.5	95.0	117.4	27.1	27.1
PL-C 10W/865/2P	75.5	95.0	117.4	27.1	27.1
PL-C 13W/827/2P	97.7	116.0	138.4	27.1	27.1
PL-C 13W/827/2P	97.7	116.0	138.4	27.1	27.1
PL-C 13W/827/2P	97.7	116.0	138.4	27.1	27.1
PL-C 13W/827/2P	97.7	116.0	138.4	27.1	27.1
PL-C 13W/830/2P	97.7	116.0	138.4	27.1	27.1
PL-C 13W/830/2P	97.7	116.0	138.4	27.1	27.1
PL-C 13W/830/2P	97.7	116.0	138.4	27.1	27.1
PL-C 13W/830/2P	97.7	116.0	138.4	27.1	27.1
PL-C 13W/840/2P	97.7	116.0	138.4	27.1	27.1
PL-C 13W/840/2P	97.7	116.0	138.4	27.1	27.1
PL-C 13W/840/2P	97.7	116.0	138.4	27.1	27.1
PL-C 13W/840/2P	97.7	116.0	138.4	27.1	27.1

Dimensional drawing

PL-C 13W/840/2P	97.7	116.0	138.4	27.1	27.1
PL-C 13W/865/2P	97.7	116.0	138.4	27.1	27.1
PL-C 13W/865/2P	97.7	116.0	138.4	27.1	27.1
PL-C 13W/865/2P	97.7	116.0	138.4	27.1	27.1
PL-C 13W/865/2P	97.7	116.0	138.4	27.1	27.1
PL-C ALTO 13W/827/2P	80.7	99.0	121.6	27.1	27.1
PL-C ALTO 13W/840/2P	80.7	99.0	121.6	27.1	27.1
PL-C 18W/840/2P	109.7	128.0	150.4	27.1	27.1
PL-C 18W/827/2P	109.7	128.0	150.4	27.1	27.1
PL-C 18W/827/2P	109.7	128.0	150.4	27.1	27.1
PL-C 18W/827/2P	109.7	128.0	150.4	27.1	27.1
PL-C 18W/827/2P	109.7	128.0	150.4	27.1	27.1
PL-C 18W/827/2P	109.7	128.0	150.4	27.1	27.1
PL-C 18W/830/2P	109.7	128.0	150.4	27.1	27.1
PL-C 18W/830/2P	109.7	128.0	150.4	27.1	27.1
PL-C 18W/830/2P	109.7	128.0	150.4	27.1	27.1
PL-C 18W/840/2P	109.7	128.0	150.4	27.1	27.1
PL-C 18W/840/2P	109.7	128.0	150.4	27.1	27.1
PL-C 18W/840/2P	109.7	128.0	150.4	27.1	27.1
PL-C 18W/840/2P	109.7	128.0	150.4	27.1	27.1
PL-C 18W/865/2P	109.7	128.0	150.4	27.1	27.1
PL-C 18W/865/2P	109.7	128.0	150.4	27.1	27.1
PL-C 18W/865/2P	109.7	128.0	150.4	27.1	27.1
PL-C 18W/865/2P	109.7	128.0	150.4	27.1	27.1
PL-C 26W/827/2P	130.7	149.0	171.4	27.1	27.1
PL-C 26W/827/2P	130.7	149.0	171.4	27.1	27.1
PL-C 26W/827/2P	130.7	149.0	171.4	27.1	27.1
PL-C 26W/827/2P	130.7	149.0	171.4	27.1	27.1
PL-C 26W/830/2P	130.7	149.0	171.4	27.1	27.1
PL-C 26W/830/2P	130.7	149.0	171.4	27.1	27.1
PL-C 26W/830/2P	130.7	149.0	171.4	27.1	27.1
PL-C 26W/840/2P	130.7	149.0	171.4	27.1	27.1
PL-C 26W/840/2P	130.7	149.0	171.4	27.1	27.1
PL-C 26W/840/2P	130.7	149.0	171.4	27.1	27.1
PL-C 26W/840/2P	130.7	149.0	171.4	27.1	27.1
PL-C 26W/865/2P	130.7	149.0	171.4	27.1	27.1
PL-C 26W/865/2P	130.7	149.0	171.4	27.1	27.1
PL-C 26W/865/2P	130.7	149.0	171.4	27.1	27.1
PL-C 26W/865/2P	130.7	149.0	171.4	27.1	27.1


General Characteristics

Order code	Full product name	Cap-Base	Life to 10% failures EM	Life to 50% failures EM	LSF EM 2000h Rated,3h cycle	LSF EM 4000h Rated,3h cycle	LSF EM 6000h Rated,3h cycle	LSF EM 8000h Rated,3h cycle	LSF EM 12000h Rated,3h cycle	LSF EM 16000h Rated,3h cycle	LSF EM 20000h Rated,3h cycle
927903608299	MASTER PL-C 10W/827/2P 1CT	G24d-1	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%
927903608499	MASTER PL-C 10W/840/2P 1CT	G24d-1	6500 hr	10000 hr	98 %	95 %	91 %	80 %	%	%	%
927903882701	MASTER PL-C 10W/827/2P 1CT	G24d-1	6500 hr	10000 hr	98 %	95 %	91 %	80 %	%	%	%
927903882705	MASTER PL-C 10W/827/2P 1CT	G24d-1	6500 hr	10000 hr	98 %	95 %	91 %	80 %	%	%	%
927903882740	MASTER PL-C 10W/827/2P 1CT	G24d-1	6500 hr	10000 hr	98 %	95 %	91 %	80 %	%	%	%
927903883001	MASTER PL-C 10W/830/2P 1CT	G24d-1	6500 hr	10000 hr	98 %	95 %	91 %	80 %	%	%	%
927903883005	MASTER PL-C 10W/830/2P 1CT	G24d-1	6500 hr	10000 hr	98 %	95 %	91 %	80 %	%	%	%
927903883040	MASTER PL-C 10W/830/2P 1CT	G24d-1	6500 hr	10000 hr	98 %	95 %	91 %	80 %	%	%	%
927903884002	MASTER PL-C 10W/840/2P 1CT	G24d-1	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%
927903884005	MASTER PL-C 10W/840/2P 1CT	G24d-1	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%
927903884040	MASTER PL-C 10W/840/2P 1CT	G24d-1	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%
927903886502	MASTER PL-C 10W/865/2P 1CT	G24d-1	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%
927903886505	MASTER PL-C 10W/865/2P 1CT	G24d-1	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%
927903886599	MASTER PL-C 10W/865/2P 1CT	G24d-1	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%
927904882701	MASTER PL-C 13W/827/2P 1CT	G24d-1	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%
927904882705	MASTER PL-C 13W/827/2P 1CT	G24d-1	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%
927904882740	MASTER PL-C 13W/827/2P 1CT	G24d-1	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%
927904882799	MASTER PL-C 13W/827/2P 1CT	G24d-1	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%
927904883001	MASTER PL-C 13W/830/2P 1CT	G24d-1	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%
927904883005	MASTER PL-C 13W/830/2P 1CT	G24d-1	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%
927904883040	MASTER PL-C 13W/830/2P 1CT	G24d-1	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%
927904884002	MASTER PL-C 13W/840/2P 1CT	G24d-1	6500 hr	10000 hr	99 %	98 %	92 %	80 %	%	%	%
927904884005	MASTER PL-C 13W/840/2P 1CT	G24d-1	6500 hr	10000 hr	99 %	98 %	92 %	80 %	%	%	%
927904884040	MASTER PL-C 13W/840/2P 1CT	G24d-1	6500 hr	10000 hr	99 %	98 %	92 %	80 %	%	%	%
927904884099	MASTER PL-C 13W/840/2P 1CT	G24d-1	6500 hr	10000 hr	99 %	98 %	92 %	80 %	%	%	%
927904886502	MASTER PL-C 13W/865/2P 1CT	G24d-1	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%
927904886505	MASTER PL-C 13W/865/2P 1CT	G24d-1	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%
927904886540	MASTER PL-C 13W/865/2P 1CT	G24d-1	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%


Order code	Full product name	Cap-Base	Life to 10% failures EM	Life to 50% failures EM	LSF EM 2000h Rated,3h cycle	LSF EM 4000h Rated,3h cycle	LSF EM 6000h Rated,3h cycle	LSF EM 8000h Rated,3h cycle	LSF EM 12000h Rated,3h cycle	LSF EM 16000h Rated,3h cycle	LSF EM 20000h Rated,3h cycle
927904886599	MASTER PL-C 13W/865/2P 1CT	G24d-1	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%
927904982762	MASTER PL-C 13W/827 GX23-2/2P 1CT	GX23-2	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%
927904984062	MASTER PL-C 13W/840 GX23-2/2P 1CT	GX23-2	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%
927905408499	MASTER PL-C 18W/840/2P 1CT	G24d-2	6500 hr	10000 hr	98 %	95 %	91 %	80 %	%	%	%
927905782701	MASTER PL-C 18W/827/2P 1CT	G24d-2	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%
927905782703	MASTER PL-C 18W/827/2P 1CT	G24d-2	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%
927905782705	MASTER PL-C 18W/827/2P 1CT	G24d-2	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%
927905782740	MASTER PL-C 18W/827/2P 1CT	G24d-2	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%
927905782799	MASTER PL-C 18W/827/2P 1CT	G24d-2	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%
927905783001	MASTER PL-C 18W/830/2P 1CT	G24d-2	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%
927905783005	MASTER PL-C 18W/830/2P 1CT	G24d-2	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%
927905783040	MASTER PL-C 18W/830/2P 1CT	G24d-2	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%
927905784001	MASTER PL-C 18W/840/2P 1CT	G24d-2	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%
927905784003	MASTER PL-C 18W/840/2P 1CT	G24d-2	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%
927905784005	MASTER PL-C 18W/840/2P 1CT	G24d-2	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%
927905784040	MASTER PL-C 18W/840/2P 1CT	G24d-2	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%
927905786502	MASTER PL-C 18W/865/2P 1CT	G24d-2	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%
927905786505	MASTER PL-C 18W/865/2P 1CT	G24d-2	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%
927905786540	MASTER PL-C 18W/865/2P 1CT	G24d-2	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%
927905786566	MASTER PL-C 18W/865/2P 1CT	G24d-2	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%
927906182701	MASTER PL-C 26W/827/2P 1CT	G24d-3	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%
927906182703	MASTER PL-C 26W/827/2P 1CT	G24d-3	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%
927906182705	MASTER PL-C 26W/827/2P 1CT	G24d-3	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%
927906182740	MASTER PL-C 26W/827/2P 1CT	G24d-3	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%
927906182766	MASTER PL-C 26W/827/2P 1CT	G24d-3	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%
927906183001	MASTER PL-C 26W/830/2P 1CT	G24d-3	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%
927906183005	MASTER PL-C 26W/830/2P 1CT	G24d-3	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%
927906183040	MASTER PL-C 26W/830/2P 1CT	G24d-3	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%

Order code	Full product name	Cap-Base	Life to 10% failures EM	Life to 50% failures EM	LSF EM 2000h Rated,3h cycle	LSF EM 4000h Rated,3h cycle	LSF EM 6000h Rated,3h cycle	LSF EM 8000h Rated,3h cycle	LSF EM 12000h Rated,3h cycle	LSF EM 16000h Rated,3h cycle	LSF EM 20000h Rated,3h cycle
927906184001	MASTER PL-C 26W/840/2P 1CT	G24d-3	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%
927906184003	MASTER PL-C 26W/840/2P 1CT	G24d-3	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%
927906184005	MASTER PL-C 26W/840/2P 1CT	G24d-3	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%
927906184040	MASTER PL-C 26W/840/2P 1CT	G24d-3	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%
927906184066	MASTER PL-C 26W/840/2P 1CT	G24d-3	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%
927906186502	MASTER PL-C 26W/865/2P 1CT	G24d-3	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%
927906186505	MASTER PL-C 26W/865/2P 1CT	G24d-3	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%
927906186540	MASTER PL-C 26W/865/2P 1CT	G24d-3	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%
927906186566	MASTER PL-C 26W/865/2P 1CT	G24d-3	6500 hr	10000 hr	99 %	98 %	92 %	78 %	%	%	%


Installation diagrams

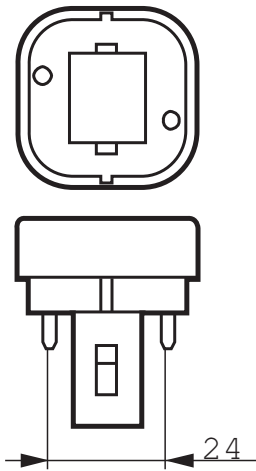

G24d-1

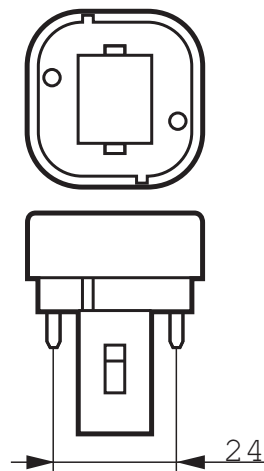

G24d-2

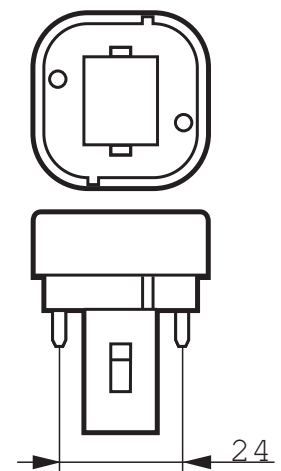

G24d-3

Light Technical Characteristics (1/2)

Order code	Full product name	Color Code	Color Rendering Index	Color Designation (text)	Color Temperature	Luminous Flux EM 25°C, Rated	Luminous Flux EM 25°C, Nominal	Lum Efficacy Rated EM 25°C	LLMF EM 2000h Rated	LLMF EM 4000h Rated	LLMF EM 6000h Rated
927903608299	MASTER PL-C 10W/ 827/2P 1CT	827	82 Ra8	Incandescent White	2700 K	600 Lm	600 Lm	60 Lm/W	92 %	87 %	83 %
927903608499	MASTER PL-C 10W/ 840/2P 1CT	840	82 Ra8	Cool White	4000 K	600 Lm	600 Lm	60 Lm/W	92 %	87 %	83 %
927903882701	MASTER PL-C 10W/ 827/2P 1CT	827	83 Ra8	Incandescent White	2700 K	600 Lm	600 Lm	60 Lm/W	92 %	87 %	83 %

Order code	Full product name	Color Code	Color Rendering Index	Color Designation (text)	Color Temperature	Luminous Flux EM 25°C, Rated	Luminous Flux EM 25°C, Nominal	Lum Efficacy Rated EM 25°C	LLMF EM 2000h Rated	LLMF EM 4000h Rated	LLMF EM 6000h Rated
927903882705	MASTER PL-C 10W/ 827/2P 1CT	827	83 Ra8	Incandescent White	2700 K	600 Lm	600 Lm	60 Lm/W	92 %	87 %	83 %
927903882740	MASTER PL-C 10W/ 827/2P 1CT	827	83 Ra8	Incandescent White	2700 K	600 Lm	600 Lm	60 Lm/W	92 %	87 %	83 %
927903883001	MASTER PL-C 10W/ 830/2P 1CT	830	83 Ra8	Warm White	3000 K	600 Lm	600 Lm	60 Lm/W	92 %	87 %	83 %
927903883005	MASTER PL-C 10W/ 830/2P 1CT	830	83 Ra8	Warm White	3000 K	600 Lm	600 Lm	60 Lm/W	92 %	87 %	83 %
927903883040	MASTER PL-C 10W/ 830/2P 1CT	830	83 Ra8	Warm White	3000 K	600 Lm	600 Lm	60 Lm/W	92 %	87 %	83 %
927903884002	MASTER PL-C 10W/ 840/2P 1CT	840	82 Ra8	Cool White	4000 K	600 Lm	600 Lm	60 Lm/W	92 %	87 %	84 %
927903884005	MASTER PL-C 10W/ 840/2P 1CT	840	82 Ra8	Cool White	4000 K	600 Lm	600 Lm	60 Lm/W	92 %	87 %	84 %
927903884040	MASTER PL-C 10W/ 840/2P 1CT	840	82 Ra8	Cool White	4000 K	600 Lm	600 Lm	60 Lm/W	92 %	87 %	84 %
927903886502	MASTER PL-C 10W/ 865/2P 1CT	865	82 Ra8	Cool Daylight	6500 K	600 Lm	600 Lm	56 Lm/W	90 %	85 %	81 %
927903886505	MASTER PL-C 10W/ 865/2P 1CT	865	82 Ra8	Cool Daylight	6500 K	600 Lm	600 Lm	56 Lm/W	90 %	85 %	81 %
927903886599	MASTER PL-C 10W/ 865/2P 1CT	865	82 Ra8	Cool Daylight	6500 K	600 Lm	600 Lm	56 Lm/W	90 %	85 %	81 %
927904882701	MASTER PL-C 13W/ 827/2P 1CT	827	83 Ra8	Incandescent White	2700 K	900 Lm	900 Lm	67 Lm/W	92 %	87 %	84 %
927904882705	MASTER PL-C 13W/ 827/2P 1CT	827	83 Ra8	Incandescent White	2700 K	900 Lm	900 Lm	67 Lm/W	92 %	87 %	84 %
927904882740	MASTER PL-C 13W/ 827/2P 1CT	827	83 Ra8	Incandescent White	2700 K	900 Lm	900 Lm	67 Lm/W	92 %	87 %	84 %
927904882799	MASTER PL-C 13W/ 827/2P 1CT	827	83 Ra8	Incandescent White	2700 K	900 Lm	900 Lm	67 Lm/W	92 %	87 %	84 %
927904883001	MASTER PL-C 13W/ 830/2P 1CT	830	82 Ra8	Warm White	3000 K	900 Lm	900 Lm	67 Lm/W	92 %	87 %	84 %
927904883005	MASTER PL-C 13W/ 830/2P 1CT	830	82 Ra8	Warm White	3000 K	900 Lm	900 Lm	67 Lm/W	92 %	87 %	84 %
927904883040	MASTER PL-C 13W/ 830/2P 1CT	830	82 Ra8	Warm White	3000 K	900 Lm	900 Lm	67 Lm/W	92 %	87 %	84 %
927904884002	MASTER PL-C 13W/ 840/2P 1CT	840	82 Ra8	Cool White	4000 K	900 Lm	900 Lm	67 Lm/W	92 %	87 %	84 %
927904884005	MASTER PL-C 13W/ 840/2P 1CT	840	82 Ra8	Cool White	4000 K	900 Lm	900 Lm	67 Lm/W	92 %	87 %	84 %
927904884040	MASTER PL-C 13W/ 840/2P 1CT	840	82 Ra8	Cool White	4000 K	900 Lm	900 Lm	67 Lm/W	92 %	87 %	84 %
927904884099	MASTER PL-C 13W/ 840/2P 1CT	840	82 Ra8	Cool White	4000 K	900 Lm	900 Lm	67 Lm/W	92 %	87 %	84 %
927904886502	MASTER PL-C 13W/ 865/2P 1CT	865	80 Ra8	Cool Daylight	6500 K	840 Lm	840 Lm	63 Lm/W	90 %	85 %	81 %
927904886505	MASTER PL-C 13W/ 865/2P 1CT	865	80 Ra8	Cool Daylight	6500 K	840 Lm	840 Lm	63 Lm/W	90 %	85 %	81 %
927904886540	MASTER PL-C 13W/ 865/2P 1CT	865	80 Ra8	Cool Daylight	6500 K	840 Lm	840 Lm	63 Lm/W	90 %	85 %	81 %
927904886599	MASTER PL-C 13W/ 865/2P 1CT	865	80 Ra8	Cool Daylight	6500 K	840 Lm	840 Lm	63 Lm/W	90 %	85 %	81 %
927904982762	MASTER PL-C 13W/827 GX23-2/2P 1CT	827	82 Ra8	Incandescent White	2700 K	800 Lm	800 Lm	62 Lm/W	92 %	87 %	84 %

Order code	Full product name	Color Code	Color Rendering Index	Color Designation (text)	Color Temperature	Luminous Flux EM 25°C, Rated	Luminous Flux EM 25°C, Nominal	Lum Efficacy Rated EM 25°C	LLMF EM 2000h Rated	LLMF EM 4000h Rated	LLMF EM 6000h Rated
927904984062	MASTER PL-C 13W/840 GX23-2/2P 1CT	840	80 Ra8	Cool White	4000 K	800 Lm	800 Lm	62 Lm/W	92 %	87 %	84 %
927905408499	MASTER PL-C 18W/ 840/2P 1CT	840	82 Ra8	Cool White	4000 K	1200 Lm	1200 Lm	67 Lm/W	92 %	87 %	83 %
927905782701	MASTER PL-C 18W/ 827/2P 1CT	827	82 Ra8	Incandescent White	2700 K	1200 Lm	1200 Lm	67 Lm/W	92 %	87 %	84 %
927905782703	MASTER PL-C 18W/ 827/2P 1CT	827	82 Ra8	Incandescent White	2700 K	1200 Lm	1200 Lm	67 Lm/W	92 %	87 %	84 %
927905782705	MASTER PL-C 18W/ 827/2P 1CT	827	82 Ra8	Incandescent White	2700 K	1200 Lm	1200 Lm	67 Lm/W	92 %	87 %	84 %
927905782740	MASTER PL-C 18W/ 827/2P 1CT	827	82 Ra8	Incandescent White	2700 K	1200 Lm	1200 Lm	67 Lm/W	92 %	87 %	84 %
927905782799	MASTER PL-C 18W/ 827/2P 1CT	827	82 Ra8	Incandescent White	2700 K	1200 Lm	1200 Lm	67 Lm/W	92 %	87 %	84 %
927905783001	MASTER PL-C 18W/ 830/2P 1CT	830	82 Ra8	Warm White	3000 K	1200 Lm	1200 Lm	67 Lm/W	92 %	87 %	84 %
927905783005	MASTER PL-C 18W/ 830/2P 1CT	830	82 Ra8	Warm White	3000 K	1200 Lm	1200 Lm	67 Lm/W	92 %	87 %	84 %
927905783040	MASTER PL-C 18W/ 830/2P 1CT	830	82 Ra8	Warm White	3000 K	1200 Lm	1200 Lm	67 Lm/W	92 %	87 %	84 %
927905784001	MASTER PL-C 18W/ 840/2P 1CT	840	82 Ra8	Cool White	4000 K	1200 Lm	1200 Lm	67 Lm/W	92 %	87 %	84 %
927905784003	MASTER PL-C 18W/ 840/2P 1CT	840	82 Ra8	Cool White	4000 K	1200 Lm	1200 Lm	67 Lm/W	92 %	87 %	84 %
927905784005	MASTER PL-C 18W/ 840/2P 1CT	840	82 Ra8	Cool White	4000 K	1200 Lm	1200 Lm	67 Lm/W	92 %	87 %	84 %
927905784040	MASTER PL-C 18W/ 840/2P 1CT	840	82 Ra8	Cool White	4000 K	1200 Lm	1200 Lm	67 Lm/W	92 %	87 %	84 %
927905786502	MASTER PL-C 18W/ 865/2P 1CT	865	82 Ra8	Cool Daylight	6500 K	1120 Lm	1200 Lm	67 Lm/W	90 %	85 %	81 %
927905786505	MASTER PL-C 18W/ 865/2P 1CT	865	82 Ra8	Cool Daylight	6500 K	1120 Lm	1200 Lm	67 Lm/W	90 %	85 %	81 %
927905786540	MASTER PL-C 18W/ 865/2P 1CT	865	82 Ra8	Cool Daylight	6500 K	1120 Lm	1200 Lm	67 Lm/W	90 %	85 %	81 %
927905786566	MASTER PL-C 18W/ 865/2P 1CT	865	82 Ra8	Cool Daylight	6500 K	1120 Lm	1200 Lm	67 Lm/W	90 %	85 %	81 %
927906182701	MASTER PL-C 26W/ 827/2P 1CT	827	83 Ra8	Incandescent White	2700 K	1800 Lm	1800 Lm	68 Lm/W	92 %	87 %	84 %
927906182703	MASTER PL-C 26W/ 827/2P 1CT	827	83 Ra8	Incandescent White	2700 K	1800 Lm	1800 Lm	68 Lm/W	92 %	87 %	84 %
927906182705	MASTER PL-C 26W/ 827/2P 1CT	827	83 Ra8	Incandescent White	2700 K	1800 Lm	1800 Lm	68 Lm/W	92 %	87 %	84 %
927906182740	MASTER PL-C 26W/ 827/2P 1CT	827	83 Ra8	Incandescent White	2700 K	1800 Lm	1800 Lm	68 Lm/W	92 %	87 %	84 %
927906182766	MASTER PL-C 26W/ 827/2P 1CT	827	83 Ra8	Incandescent White	2700 K	1800 Lm	1800 Lm	68 Lm/W	92 %	87 %	84 %
927906183001	MASTER PL-C 26W/ 830/2P 1CT	830	83 Ra8	Warm White	3000 K	1800 Lm	1800 Lm	68 Lm/W	92 %	87 %	84 %
927906183005	MASTER PL-C 26W/ 830/2P 1CT	830	83 Ra8	Warm White	3000 K	1800 Lm	1800 Lm	68 Lm/W	92 %	87 %	84 %
927906183040	MASTER PL-C 26W/ 830/2P 1CT	830	83 Ra8	Warm White	3000 K	1800 Lm	1800 Lm	68 Lm/W	92 %	87 %	84 %
927906184001	MASTER PL-C 26W/ 840/2P 1CT	840	82 Ra8	Cool White	4000 K	1800 Lm	1800 Lm	68 Lm/W	92 %	87 %	84 %

Order code	Full product name	Color Code	Color Rendering Index	Color Designation (text)	Color Temperature	Luminous Flux EM 25°C, Rated	Luminous Flux EM 25°C, Nominal	Lum Efficacy Rated EM 25°C	LLMF EM 2000h Rated	LLMF EM 4000h Rated	LLMF EM 6000h Rated
927906184003	MASTER PL-C 26W/ 840/2P 1CT	840	82 Ra8	Cool White	4000 K	1800 Lm	1800 Lm	68 Lm/W	92 %	87 %	84 %
927906184005	MASTER PL-C 26W/ 840/2P 1CT	840	82 Ra8	Cool White	4000 K	1800 Lm	1800 Lm	68 Lm/W	92 %	87 %	84 %
927906184040	MASTER PL-C 26W/ 840/2P 1CT	840	82 Ra8	Cool White	4000 K	1800 Lm	1800 Lm	68 Lm/W	92 %	87 %	84 %
927906184066	MASTER PL-C 26W/ 840/2P 1CT	840	82 Ra8	Cool White	4000 K	1800 Lm	1800 Lm	68 Lm/W	92 %	87 %	84 %
927906186502	MASTER PL-C 26W/ 865/2P 1CT	865	82 Ra8	Cool Daylight	6500 K	1740 Lm	1740 Lm	66 Lm/W	90 %	85 %	81 %
927906186505	MASTER PL-C 26W/ 865/2P 1CT	865	82 Ra8	Cool Daylight	6500 K	1740 Lm	1740 Lm	66 Lm/W	90 %	85 %	81 %
927906186540	MASTER PL-C 26W/ 865/2P 1CT	865	82 Ra8	Cool Daylight	6500 K	1740 Lm	1740 Lm	66 Lm/W	90 %	85 %	81 %
927906186566	MASTER PL-C 26W/ 865/2P 1CT	865	82 Ra8	Cool Daylight	6500 K	1740 Lm	1740 Lm	66 Lm/W	90 %	85 %	81 %

Light Technical Characteristics (2/2)

Order code	Full product name	LLMF EM 8000h Rated	LLMF EM 12000h Rated	LLMF EM 16000h Rated	LLMF EM 20000h Rated	Design Temperature	Chromaticity Coordinate X	Chromaticity Coordinate Y
927903608299	MASTER PL-C 10W/827/2P 1CT	81 %	%	%	%	28 C	455 -	415 -
927903608499	MASTER PL-C 10W/840/2P 1CT	81 %	%	%	%	28 C	380 -	380 -
927903882701	MASTER PL-C 10W/827/2P 1CT	81 %	%	%	%	28 C	463 -	420 -
927903882705	MASTER PL-C 10W/827/2P 1CT	81 %	%	%	%	28 C	463 -	420 -
927903882740	MASTER PL-C 10W/827/2P 1CT	81 %	%	%	%	28 C	463 -	420 -
927903883001	MASTER PL-C 10W/830/2P 1CT	81 %	%	%	%	28 C	440 -	403 -
927903883005	MASTER PL-C 10W/830/2P 1CT	81 %	%	%	%	28 C	440 -	403 -
927903883040	MASTER PL-C 10W/830/2P 1CT	81 %	%	%	%	28 C	440 -	403 -
927903884002	MASTER PL-C 10W/840/2P 1CT	81 %	%	%	%	28 C	380 -	380 -
927903884005	MASTER PL-C 10W/840/2P 1CT	81 %	%	%	%	28 C	380 -	380 -
927903884040	MASTER PL-C 10W/840/2P 1CT	81 %	%	%	%	28 C	380 -	380 -
927903886502	MASTER PL-C 10W/865/2P 1CT	77 %	%	%	%	28 C	313 -	337 -
927903886505	MASTER PL-C 10W/865/2P 1CT	77 %	%	%	%	28 C	313 -	337 -
927903886599	MASTER PL-C 10W/865/2P 1CT	77 %	%	%	%	28 C	313 -	337 -
927904882701	MASTER PL-C 13W/827/2P 1CT	81 %	%	%	%	28 C	463 -	420 -
927904882705	MASTER PL-C 13W/827/2P 1CT	81 %	%	%	%	28 C	463 -	420 -
927904882740	MASTER PL-C 13W/827/2P 1CT	81 %	%	%	%	28 C	463 -	420 -
927904882799	MASTER PL-C 13W/827/2P 1CT	81 %	%	%	%	28 C	463 -	420 -
927904883001	MASTER PL-C 13W/830/2P 1CT	81 %	%	%	%	28 C	440 -	403 -
927904883005	MASTER PL-C 13W/830/2P 1CT	81 %	%	%	%	28 C	440 -	403 -
927904883040	MASTER PL-C 13W/830/2P 1CT	81 %	%	%	%	28 C	440 -	403 -
927904884002	MASTER PL-C 13W/840/2P 1CT	81 %	%	%	%	28 C	380 -	380 -
927904884005	MASTER PL-C 13W/840/2P 1CT	81 %	%	%	%	28 C	380 -	380 -
927904884040	MASTER PL-C 13W/840/2P 1CT	81 %	%	%	%	28 C	380 -	380 -
927904884099	MASTER PL-C 13W/840/2P 1CT	81 %	%	%	%	28 C	380 -	380 -
927904886502	MASTER PL-C 13W/865/2P 1CT	77 %	%	%	%	28 C	313 -	337 -
927904886505	MASTER PL-C 13W/865/2P 1CT	77 %	%	%	%	28 C	313 -	337 -

Order code	Full product name	LLMF EM 8000h Rated	LLMF EM 12000h Rated	LLMF EM 16000h Rated	LLMF EM 20000h Rated	Design Temperature	Chromaticity Coordinate X	Chromaticity Coordinate Y
927904886540	MASTER PL-C 13W/865/2P 1CT	77 %	%	%	%	28 C	313 -	337 -
927904886599	MASTER PL-C 13W/865/2P 1CT	77 %	%	%	%	28 C	313 -	337 -
927904982762	MASTER PL-C 13W/827 GX23-2/2P 1CT	81 %	%	%	%	28 C	458 -	418 -
927904984062	MASTER PL-C 13W/840 GX23-2/2P 1CT	81 %	%	%	%	28 C	383 -	387 -
927905408499	MASTER PL-C 18W/840/2P 1CT	81 %	%	%	%	28 C	381 -	380 -
927905782701	MASTER PL-C 18W/827/2P 1CT	81 %	%	%	%	28 C	463 -	420 -
927905782703	MASTER PL-C 18W/827/2P 1CT	81 %	%	%	%	28 C	463 -	420 -
927905782705	MASTER PL-C 18W/827/2P 1CT	81 %	%	%	%	28 C	463 -	420 -
927905782740	MASTER PL-C 18W/827/2P 1CT	81 %	%	%	%	28 C	463 -	420 -
927905782799	MASTER PL-C 18W/827/2P 1CT	81 %	%	%	%	28 C	463 -	420 -
927905783001	MASTER PL-C 18W/830/2P 1CT	81 %	%	%	%	28 C	440 -	403 -
927905783005	MASTER PL-C 18W/830/2P 1CT	81 %	%	%	%	28 C	440 -	403 -
927905783040	MASTER PL-C 18W/830/2P 1CT	81 %	%	%	%	28 C	440 -	403 -
927905784001	MASTER PL-C 18W/840/2P 1CT	81 %	%	%	%	28 C	380 -	380 -
927905784003	MASTER PL-C 18W/840/2P 1CT	81 %	%	%	%	28 C	380 -	380 -
927905784005	MASTER PL-C 18W/840/2P 1CT	81 %	%	%	%	28 C	380 -	380 -
927905784040	MASTER PL-C 18W/840/2P 1CT	81 %	%	%	%	28 C	380 -	380 -
927905786502	MASTER PL-C 18W/865/2P 1CT	77 %	%	%	%	28 C	313 -	337 -
927905786505	MASTER PL-C 18W/865/2P 1CT	77 %	%	%	%	28 C	313 -	337 -
927905786540	MASTER PL-C 18W/865/2P 1CT	77 %	%	%	%	28 C	313 -	337 -
927905786566	MASTER PL-C 18W/865/2P 1CT	77 %	%	%	%	28 C	313 -	337 -
927906182701	MASTER PL-C 26W/827/2P 1CT	81 %	%	%	%	28 C	463 -	420 -
927906182703	MASTER PL-C 26W/827/2P 1CT	81 %	%	%	%	28 C	463 -	420 -
927906182705	MASTER PL-C 26W/827/2P 1CT	81 %	%	%	%	28 C	463 -	420 -
927906182740	MASTER PL-C 26W/827/2P 1CT	81 %	%	%	%	28 C	463 -	420 -
927906182766	MASTER PL-C 26W/827/2P 1CT	81 %	%	%	%	28 C	463 -	420 -
927906183001	MASTER PL-C 26W/830/2P 1CT	81 %	%	%	%	28 C	440 -	403 -
927906183005	MASTER PL-C 26W/830/2P 1CT	81 %	%	%	%	28 C	440 -	403 -
927906183040	MASTER PL-C 26W/830/2P 1CT	81 %	%	%	%	28 C	440 -	403 -
927906184001	MASTER PL-C 26W/840/2P 1CT	81 %	%	%	%	28 C	380 -	380 -
927906184003	MASTER PL-C 26W/840/2P 1CT	81 %	%	%	%	28 C	380 -	380 -
927906184005	MASTER PL-C 26W/840/2P 1CT	81 %	%	%	%	28 C	380 -	380 -
927906184040	MASTER PL-C 26W/840/2P 1CT	81 %	%	%	%	28 C	380 -	380 -
927906184066	MASTER PL-C 26W/840/2P 1CT	81 %	%	%	%	28 C	380 -	380 -
927906186502	MASTER PL-C 26W/865/2P 1CT	77 %	%	%	%	28 C	313 -	337 -
927906186505	MASTER PL-C 26W/865/2P 1CT	77 %	%	%	%	28 C	313 -	337 -
927906186540	MASTER PL-C 26W/865/2P 1CT	77 %	%	%	%	28 C	313 -	337 -
927906186566	MASTER PL-C 26W/865/2P 1CT	77 %	%	%	%	28 C	313 -	337 -


Electrical Characteristics

Order code	Full product name	Lamp Wattage	Lamp Wattage EM 25°C, Nominal	Lamp Wattage EM 25°C, Rated	Lamp Voltage EM 25°C	Lamp Current EM 25°C	Dimmable
927903608299	MASTER PL-C 10W/827/2P 1CT	10 W	10 W	10.0 W	64 V	0.190 A	No
927903608499	MASTER PL-C 10W/840/2P 1CT	10 W	10 W	10.0 W	64 V	0.190 A	No
927903882701	MASTER PL-C 10W/827/2P 1CT	10 W	10 W	10.0 W	63 V	0.190 A	No


Order code	Full product name	Lamp Wattage	Lamp Wattage EM 25°C, Nominal	Lamp Wattage EM 25°C, Rated	Lamp Voltage EM 25°C	Lamp Current EM 25°C	Dimmable
927903882705	MASTER PL-C 10W/827/2P 1CT	10 W	10 W	10.0 W	63 V	0.190 A	No
927903882740	MASTER PL-C 10W/827/2P 1CT	10 W	10 W	10.0 W	63 V	0.190 A	No
927903883001	MASTER PL-C 10W/830/2P 1CT	10 W	10 W	10.0 W	63 V	0.190 A	No
927903883005	MASTER PL-C 10W/830/2P 1CT	10 W	10 W	10.0 W	63 V	0.190 A	No
927903883040	MASTER PL-C 10W/830/2P 1CT	10 W	10 W	10.0 W	63 V	0.190 A	No
927903884002	MASTER PL-C 10W/840/2P 1CT	10 W	10 W	10.0 W	63 V	0.190 A	No
927903884005	MASTER PL-C 10W/840/2P 1CT	10 W	10 W	10.0 W	63 V	0.190 A	No
927903884040	MASTER PL-C 10W/840/2P 1CT	10 W	10 W	10.0 W	63 V	0.190 A	No
927903886502	MASTER PL-C 10W/865/2P 1CT	10 W	10 W	10.0 W	63 V	0.190 A	No
927903886505	MASTER PL-C 10W/865/2P 1CT	10 W	10 W	10.0 W	63 V	0.190 A	No
927903886599	MASTER PL-C 10W/865/2P 1CT	10 W	10 W	10.0 W	63 V	0.190 A	No
927904882701	MASTER PL-C 13W/827/2P 1CT	13 W	13 W	13.4 W	95 V	0.170 A	No
927904882705	MASTER PL-C 13W/827/2P 1CT	13 W	13 W	13.4 W	95 V	0.170 A	No
927904882740	MASTER PL-C 13W/827/2P 1CT	13 W	13 W	13.4 W	95 V	0.170 A	No
927904882799	MASTER PL-C 13W/827/2P 1CT	13 W	13 W	13.4 W	95 V	0.170 A	No
927904883001	MASTER PL-C 13W/830/2P 1CT	13 W	13 W	13.4 W	95 V	0.170 A	No
927904883005	MASTER PL-C 13W/830/2P 1CT	13 W	13 W	13.4 W	95 V	0.170 A	No
927904883040	MASTER PL-C 13W/830/2P 1CT	13 W	13 W	13.4 W	95 V	0.170 A	No
927904884002	MASTER PL-C 13W/840/2P 1CT	13 W	13 W	13.4 W	95 V	0.170 A	No
927904884005	MASTER PL-C 13W/840/2P 1CT	13 W	13 W	13.4 W	95 V	0.170 A	No
927904884040	MASTER PL-C 13W/840/2P 1CT	13 W	13 W	13.4 W	95 V	0.170 A	No
927904884099	MASTER PL-C 13W/840/2P 1CT	13 W	13 W	13.4 W	95 V	0.170 A	No
927904886502	MASTER PL-C 13W/865/2P 1CT	13 W	13 W	13.4 W	95 V	0.170 A	No
927904886505	MASTER PL-C 13W/865/2P 1CT	13 W	13 W	13.4 W	95 V	0.170 A	No
927904886540	MASTER PL-C 13W/865/2P 1CT	13 W	13 W	13.4 W	95 V	0.170 A	No
927904886599	MASTER PL-C 13W/865/2P 1CT	13 W	13 W	13.4 W	95 V	0.170 A	No
927904982762	MASTER PL-C 13W/827 GX23-2/2P 1CT	13 W	13 W	12.7 W	56 V	0.290 A	No
927904984062	MASTER PL-C 13W/840 GX23-2/2P 1CT	13 W	13 W	12.7 W	56 V	0.290 A	No
927905408499	MASTER PL-C 18W/840/2P 1CT	18 W	18 W	17.9 W	100 V	0.220 A	No
927905782701	MASTER PL-C 18W/827/2P 1CT	18 W	18 W	17.9 W	95 V	0.230 A	No
927905782703	MASTER PL-C 18W/827/2P 1CT	18 W	18 W	17.9 W	95 V	0.230 A	No
927905782705	MASTER PL-C 18W/827/2P 1CT	18 W	18 W	17.9 W	95 V	0.230 A	No
927905782740	MASTER PL-C 18W/827/2P 1CT	18 W	18 W	17.9 W	95 V	0.230 A	No
927905782799	MASTER PL-C 18W/827/2P 1CT	18 W	18 W	17.9 W	95 V	0.230 A	No
927905783001	MASTER PL-C 18W/830/2P 1CT	18 W	18 W	17.9 W	95 V	0.230 A	No
927905783005	MASTER PL-C 18W/830/2P 1CT	18 W	18 W	17.9 W	95 V	0.230 A	No
927905783040	MASTER PL-C 18W/830/2P 1CT	18 W	18 W	17.9 W	95 V	0.230 A	No
927905784001	MASTER PL-C 18W/840/2P 1CT	18 W	18 W	17.9 W	95 V	0.230 A	No
927905784003	MASTER PL-C 18W/840/2P 1CT	18 W	18 W	17.9 W	95 V	0.230 A	No
927905784005	MASTER PL-C 18W/840/2P 1CT	18 W	18 W	17.9 W	95 V	0.230 A	No
927905784040	MASTER PL-C 18W/840/2P 1CT	18 W	18 W	17.9 W	95 V	0.230 A	No
927905786502	MASTER PL-C 18W/865/2P 1CT	18 W	18 W	17.9 W	95 V	0.230 A	No
927905786505	MASTER PL-C 18W/865/2P 1CT	18 W	18 W	17.9 W	95 V	0.230 A	No
927905786540	MASTER PL-C 18W/865/2P 1CT	18 W	18 W	17.9 W	95 V	0.230 A	No
927905786566	MASTER PL-C 18W/865/2P 1CT	18 W	18 W	17.9 W	95 V	0.230 A	No
927906182701	MASTER PL-C 26W/827/2P 1CT	26 W	26 W	26.5 W	100 V	0.335 A	No
927906182703	MASTER PL-C 26W/827/2P 1CT	26 W	26 W	26.5 W	100 V	0.335 A	No
927906182705	MASTER PL-C 26W/827/2P 1CT	26 W	26 W	26.5 W	100 V	0.335 A	No

Order code	Full product name	Lamp Wattage	Lamp Wattage EM 25°C, Nominal	Lamp Wattage EM 25°C, Rated	Lamp Voltage EM 25°C	Lamp Current EM 25°C	Dimmable
927906182740	MASTER PL-C 26W/827/2P 1CT	26 W	26 W	26.5 W	100 V	0.335 A	No
927906182766	MASTER PL-C 26W/827/2P 1CT	26 W	26 W	26.5 W	100 V	0.335 A	No
927906183001	MASTER PL-C 26W/830/2P 1CT	26 W	26 W	26.5 W	100 V	0.335 A	No
927906183005	MASTER PL-C 26W/830/2P 1CT	26 W	26 W	26.5 W	100 V	0.335 A	No
927906183040	MASTER PL-C 26W/830/2P 1CT	26 W	26 W	26.5 W	100 V	0.335 A	No
927906184001	MASTER PL-C 26W/840/2P 1CT	26 W	26 W	26.5 W	100 V	0.335 A	No
927906184003	MASTER PL-C 26W/840/2P 1CT	26 W	26 W	26.5 W	100 V	0.335 A	No
927906184005	MASTER PL-C 26W/840/2P 1CT	26 W	26 W	26.5 W	100 V	0.335 A	No
927906184040	MASTER PL-C 26W/840/2P 1CT	26 W	26 W	26.5 W	100 V	0.335 A	No
927906184066	MASTER PL-C 26W/840/2P 1CT	26 W	26 W	26.5 W	100 V	0.335 A	No
927906186502	MASTER PL-C 26W/865/2P 1CT	26 W	26 W	26.5 W	100 V	0.335 A	No
927906186505	MASTER PL-C 26W/865/2P 1CT	26 W	26 W	26.5 W	100 V	0.335 A	No
927906186540	MASTER PL-C 26W/865/2P 1CT	26 W	26 W	26.5 W	100 V	0.335 A	No
927906186566	MASTER PL-C 26W/865/2P 1CT	26 W	26 W	26.5 W	100 V	0.335 A	No


Performance diagrams



cycle

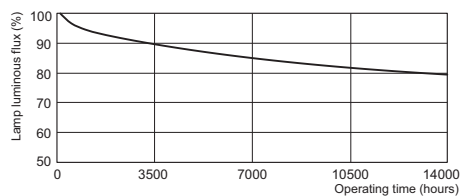

Lumen Maintenance 3h + 12 h cycle

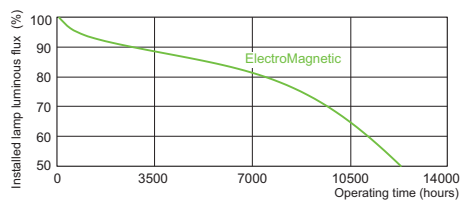

Service Lifetime 3 h cycle

Environmental Characteristics

Order code	Full product name	Energy Efficiency Label (EEL)	Mercury (Hg) Content
927903608299	MASTER PL-C 10W/827/2P 1CT	B	1.4 mg
927903608499	MASTER PL-C 10W/840/2P 1CT	B	1.4 mg
927903882701	MASTER PL-C 10W/827/2P 1CT	B	1.4 mg
927903882705	MASTER PL-C 10W/827/2P 1CT	B	1.4 mg

Order code	Full product name	Energy Efficiency Label (EEL)	Mercury (Hg) Content
927903882740	MASTER PL-C 10W/827/2P 1CT	B	1.4 mg
927903883001	MASTER PL-C 10W/830/2P 1CT	B	1.4 mg
927903883005	MASTER PL-C 10W/830/2P 1CT	B	1.4 mg
927903883040	MASTER PL-C 10W/830/2P 1CT	B	1.4 mg

Order code	Full product name	Energy Efficiency Label (EEL)	Mercury (Hg) Content
927903884002	MASTER PL-C 10W/840/2P 1CT	B	1.4 mg
927903884005	MASTER PL-C 10W/840/2P 1CT	B	1.4 mg
927903884040	MASTER PL-C 10W/840/2P 1CT	B	1.4 mg
927903886502	MASTER PL-C 10W/865/2P 1CT	B	-
927903886505	MASTER PL-C 10W/865/2P 1CT	B	-
927903886599	MASTER PL-C 10W/865/2P 1CT	B	-
927904882701	MASTER PL-C 13W/827/2P 1CT	A	1.4 mg
927904882705	MASTER PL-C 13W/827/2P 1CT	A	1.4 mg
927904882740	MASTER PL-C 13W/827/2P 1CT	A	1.4 mg
927904882799	MASTER PL-C 13W/827/2P 1CT	A	1.4 mg
927904883001	MASTER PL-C 13W/830/2P 1CT	A	1.4 mg
927904883005	MASTER PL-C 13W/830/2P 1CT	A	1.4 mg
927904883040	MASTER PL-C 13W/830/2P 1CT	A	1.4 mg
927904884002	MASTER PL-C 13W/840/2P 1CT	A	1.4 mg
927904884005	MASTER PL-C 13W/840/2P 1CT	A	1.4 mg
927904884040	MASTER PL-C 13W/840/2P 1CT	A	1.4 mg
927904884099	MASTER PL-C 13W/840/2P 1CT	A	1.4 mg
927904886502	MASTER PL-C 13W/865/2P 1CT	B	1.4 mg
927904886505	MASTER PL-C 13W/865/2P 1CT	B	1.4 mg
927904886540	MASTER PL-C 13W/865/2P 1CT	B	1.4 mg
927904886599	MASTER PL-C 13W/865/2P 1CT	B	1.4 mg
927904982762	MASTER PL-C 13W/827 GX23-2/2P 1CT	A	1.4 mg
927904984062	MASTER PL-C 13W/840 GX23-2/2P 1CT	A	1.4 mg
927905408499	MASTER PL-C 18W/840/2P 1CT	B	1.4 mg
927905782701	MASTER PL-C 18W/827/2P 1CT	B	1.4 mg
927905782703	MASTER PL-C 18W/827/2P 1CT	B	1.4 mg
927905782705	MASTER PL-C 18W/827/2P 1CT	B	1.4 mg
927905782740	MASTER PL-C 18W/827/2P 1CT	B	1.4 mg
927905782799	MASTER PL-C 18W/827/2P 1CT	B	1.4 mg

Order code	Full product name	Energy Efficiency Label (EEL)	Mercury (Hg) Content
927905783001	MASTER PL-C 18W/830/2P 1CT	B	1.4 mg
927905783005	MASTER PL-C 18W/830/2P 1CT	B	1.4 mg
927905783040	MASTER PL-C 18W/830/2P 1CT	B	1.4 mg
927905784001	MASTER PL-C 18W/840/2P 1CT	B	1.4 mg
927905784003	MASTER PL-C 18W/840/2P 1CT	B	1.4 mg
927905784005	MASTER PL-C 18W/840/2P 1CT	B	1.4 mg
927905784040	MASTER PL-C 18W/840/2P 1CT	B	1.4 mg
927905786502	MASTER PL-C 18W/865/2P 1CT	B	1.4 mg
927905786505	MASTER PL-C 18W/865/2P 1CT	B	1.4 mg
927905786540	MASTER PL-C 18W/865/2P 1CT	B	1.4 mg
927905786566	MASTER PL-C 18W/865/2P 1CT	B	1.4 mg
927906182701	MASTER PL-C 26W/827/2P 1CT	B	1.4 mg
927906182703	MASTER PL-C 26W/827/2P 1CT	B	1.4 mg
927906182705	MASTER PL-C 26W/827/2P 1CT	B	1.4 mg
927906182740	MASTER PL-C 26W/827/2P 1CT	B	1.4 mg
927906182766	MASTER PL-C 26W/827/2P 1CT	B	1.4 mg
927906183001	MASTER PL-C 26W/830/2P 1CT	B	1.4 mg
927906183005	MASTER PL-C 26W/830/2P 1CT	B	1.4 mg
927906183040	MASTER PL-C 26W/830/2P 1CT	B	1.4 mg
927906184001	MASTER PL-C 26W/840/2P 1CT	B	1.4 mg
927906184003	MASTER PL-C 26W/840/2P 1CT	B	1.4 mg
927906184005	MASTER PL-C 26W/840/2P 1CT	B	1.4 mg
927906184040	MASTER PL-C 26W/840/2P 1CT	B	1.4 mg
927906184066	MASTER PL-C 26W/840/2P 1CT	B	1.4 mg
927906186502	MASTER PL-C 26W/865/2P 1CT	B	1.4 mg
927906186505	MASTER PL-C 26W/865/2P 1CT	B	1.4 mg
927906186540	MASTER PL-C 26W/865/2P 1CT	B	1.4 mg
927906186566	MASTER PL-C 26W/865/2P 1CT	B	1.4 mg



© 2013 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2013, March 26
data subject to change