


VELCRO® Brand

Product Catalog

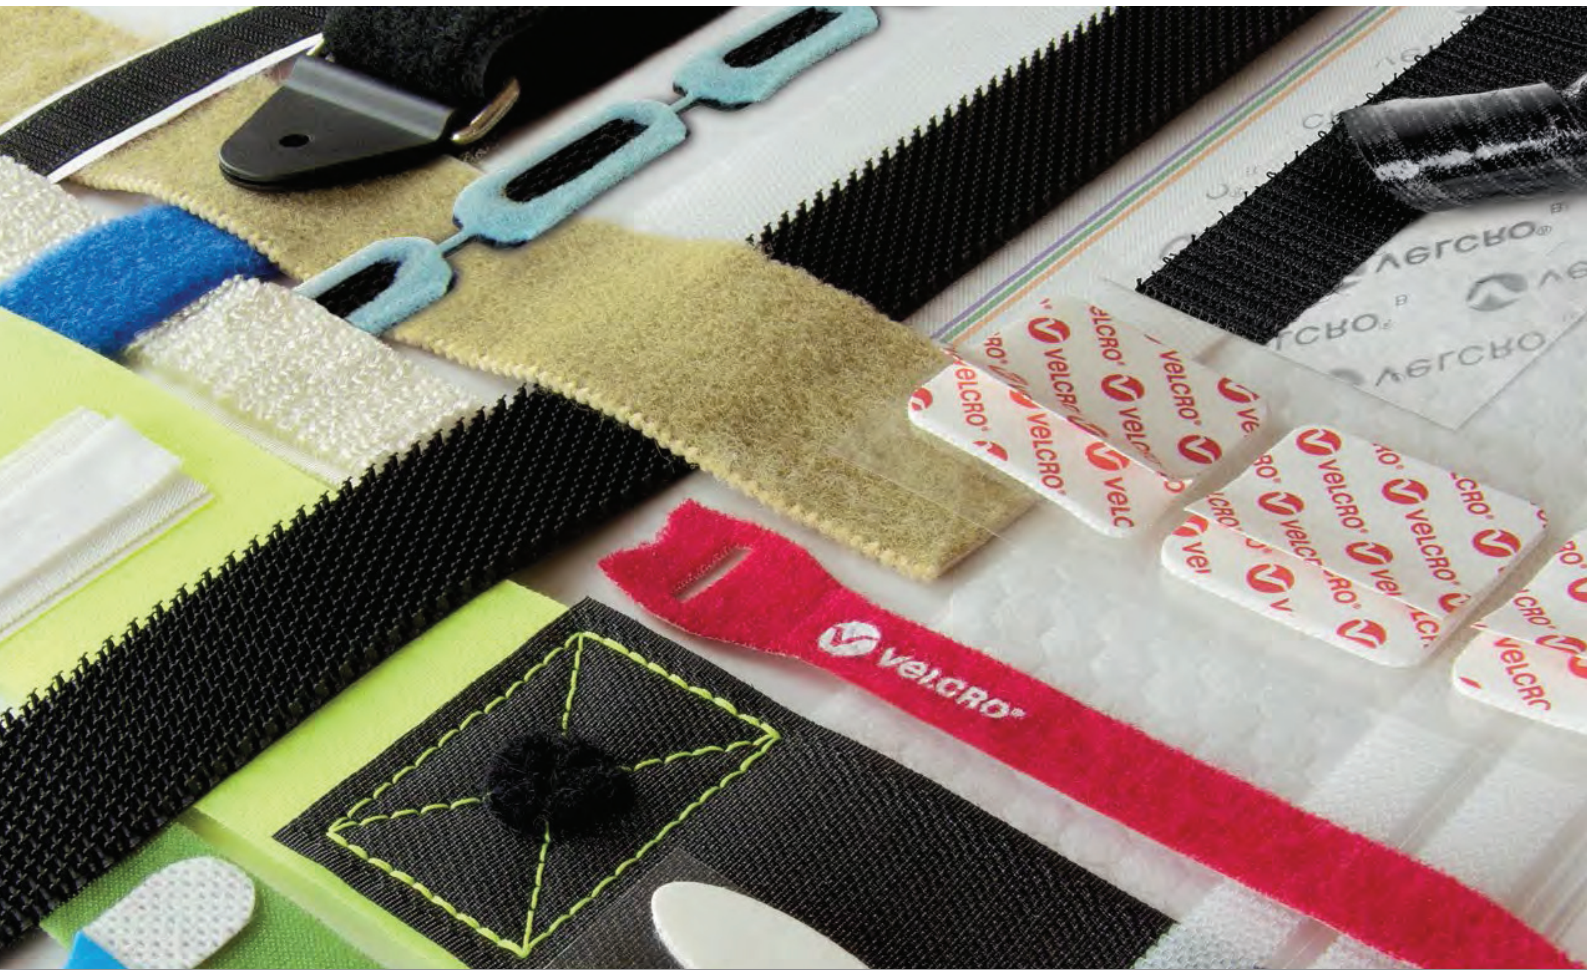

PRESSURE SENSITIVE • SEW-ON • CABLE MANAGEMENT
SPECIALTY HOOK & LOOP • STRAPS • RETAIL PACKS



Table of Contents



Pressure Sensitive

Hook 88.....	6
Loop 1000.....	6
Hook 89.....	6
Loop 1100.....	7
Hook 65.....	7
Loop 2000.....	7
Hook 81.....	8
Loop 9000.....	8
VELCOIN®.....	8
Hook 705.....	9
Hook 805.....	9
Hook 711.....	9
Hook 811.....	10
Loop 3905.....	10
Loop 3610.....	10
Loop 3003.....	11
Adhesives.....	12-15



Sew-On

Hook 88.....	18
Loop 1000.....	18
Hook 89.....	18
Loop 1100.....	19
Hook 65.....	19
Loop 2000.....	19
Hook 81.....	20
Loop 9000.....	20
VELCOIN®.....	20
Hook 705.....	21
Hook 805.....	21
Hook 711.....	21
Hook 811.....	22
Loop 3905.....	22
Loop 3610.....	22
Loop 3003.....	23



Cable Management

ONE-WRAP®.....	26
ONE-WRAP® Strap.....	26
ONE-WRAP® - FR.....	26
ONE-WRAP® Strap - FR.....	27
QWIK TIE.....	27
QWIK TIE Straps.....	27
BUNDLE TIES.....	28



Specialty Hook & Loop

MOLDED HOOK

Hook 511.....	32
Hook 757.....	32

HEAT, SOLVENT & WELDABLE FASTENERS

Loop 1000.....	32
Hook 88.....	33
Hook 848.....	33
Knit Loop 3607.....	33

ELASTIC LOOP

VELSTRETCH® Loop 151.....	34
Loop 152.....	34

FR & HIGH TEMPERATURE

HI-AIR® Hook 66.....	34
HI-AIR® Loop 3000.....	35
HI-GARDE® Hook 46.....	35
HI-GARDE® Loop 8000.....	35

WOVEN

VEL-LOC® 87S.....	36
-------------------	----

DISPLAY

VELTEX® Laminated Loop.....	36
-----------------------------	----

HARDWARE

VELSTICK®.....	37
----------------	----



Straps

VELSTRAP®.....	40
LOGISTRAP™.....	40



Retail Packs

90070.....	
STICKY BACK 5/8" Coins.....	44
90081.....	
STICKY BACK 15' x 3/4" Tape.....	44
90082.....	
STICKY BACK 15' x 3/4" Tape.....	44
90197.....	
INDUSTRIAL STRENGTH 15' x 2" Tape.....	45
90198.....	
INDUSTRIAL STRENGTH 15' x 2" Tape.....	45
90924.....	
ONE-WRAP® Thin Ties 8" x 1/2".....	45
91140.....	
ONE-WRAP® Thin Ties 8" x 1/2".....	46
91365.....	
INDUSTRIAL STRENGTH EXTREME 10' x 1" Tape.....	46



VELCRO® Brand

Hook 88

Apparel, cable management, polishing discs, mop heads, orthopedics, seat trim, aviation, furnishings, straps.

Base material: Nylon

Standard colors: Black, white

Standard widths (inches): 1/2, 5/8, 3/4, 1, 1-1/2, 2, 3, 4

Standard put-ups (yards): 25 yd roll

Adhesive type: 15, 19, 72

Cycle life: High

Suggested mating component: Loop 1000



VELCRO® Brand

Loop 1000

Apparel, cable management, polishing discs, mop heads, orthopedics, seat trim, aviation, furnishings, straps.

Base material: Nylon

Standard colors: Black, white

Standard widths (inches): 1/2, 5/8, 3/4, 1, 1-1/2, 2, 3, 4

Standard put-ups (yards): 25 yd roll

Adhesive type: 15, 19, 72

Cycle life: High

Suggested mating component: Hook 88



VELCRO® Brand

Hook 89

Professional apparel (military, firefighters, etc.), mop heads, applications requiring IR resistance.

Base material: Nylon

Standard colors: Black, tan, coyote, foliage green

Standard widths (inches): 1/2, 5/8, 3/4, 1, 1-1/2, 2, 3, 4

Standard put-ups (yards): 25 yd roll

Adhesive type: 19, 72

Cycle life: High

Suggested mating component: Loop 1100



Pressure Sensitive

VELCRO® Brand

Loop 1100

Professional apparel (military, firefighters, etc.), mop heads, applications requiring IR resistance.

Base material: Nylon

Standard colors: Black, tan, coyote, foliage green

Standard widths (inches): 1/2, 5/8, 3/4, 1, 1-1/2, 2, 3, 4

Standard put-ups (yards): 25 yd roll

Adhesive type: 19, 72

Cycle life: High

Suggested mating component: Hook 89



VELCRO® Brand

Hook 65

Apparel, cable management, orthopedics, seat trim, aviation, furnishings, straps.

Base material: Nylon

Standard colors: Black, white

Standard widths (inches): 1/2, 5/8, 3/4, 1, 1-1/2, 2, 3, 4

Standard put-ups (yards): 25 yd roll

Adhesive type: 15, 19, 72

Cycle life: High

Suggested mating component: Loop 2000



VELCRO® Brand

Loop 2000

Apparel, cable management, polishing disks, mop heads, orthopedics, seat trim, aviation, furnishings, straps.

Base material: Nylon

Standard colors: Black

Standard widths (inches): 1/2, 5/8, 3/4, 1, 1-1/2, 2, 3, 4

Standard put-ups (yards): 25 yd roll

Adhesive type: 15, 19, 72

Cycle life: High

Suggested mating component: Hook 88





VELCRO® Brand

Hook 81

Apparel, outdoor applications, other applications requiring weather (UV and moisture) resistance.

Base material: Polyester

Standard colors: Black, white

Standard widths (inches): 5/8, 3/4, 1, 1-1/2, 2, 4

Standard put-ups (yards): 25 yd roll

Adhesive type: 13, 72

Cycle life: Medium

Suggested mating component: Loop 9000 Polyester



VELCRO® Brand

Loop 9000

Apparel, outdoor applications, other applications requiring weather (UV and moisture) resistance.

Base material: Polyester

Standard colors: Black, white

Standard widths (inches): 5/8, 3/4, 1, 1-1/2, 2, 4

Standard put-ups (yards): 25 yd roll

Adhesive type: 13, 72

Cycle life: Medium

Suggested mating component: Hook 081 Polyester



VELCRO® Brand

VELCOIN®

Apparel, office folders, stationery, rigid packaging and trays, bag closure.

Base material: Nylon

Standard colors: Black, white

Standard widths (inches): 1/2, 5/8, 3/4, 7/8, 1-3/8, 1-7/8

Standard put-ups (yards): 25 yd roll

Adhesive type: 72

Cycle life: High

Suggested mating component: Hook 88, Loop 1000



Pressure Sensitive

VELCRO® Brand

Hook 705

Adjustable straps, signage, POP, displays.

Base material: Nylon

Standard colors: Black, white

Standard widths (inches): 5/8, 3/4, 1, 1-1/2, 2, 4

Standard put-ups (yards): 50 yd roll

Adhesive type: 15, 19, 72

Cycle life: High / Medium

Suggested mating component: Loop 1000, Loop 3003



VELCRO® Brand

Hook 805

Polishing discs, headgear, orthopaedic braces, helmets, molding, RF weldable.

Base material: Nylon

Standard colors: Black, white

Standard widths (inches): 5/8, 3/4, 1, 1-1/2, 2, 4

Standard put-ups (yards): 50 yd roll

Adhesive type: 15, 19, 72

Cycle life: High / Medium

Suggested mating component: Loop 3610



VELCRO® Brand

Hook 711

Medical applications, sports equipment.

Base material: Polyethylene

Standard colors: Black, white, natural

Standard widths (inches): 5/8, 3/4, 1, 1-1/2, 2, 4

Standard put-ups (yards): 25 yd roll

Adhesive type: 15, 19

Cycle life: Medium / Low

Suggested mating component: Loop 3003, Loop 3200





VELCRO® Brand

Hook 811



Medical disposable, sterilize goods, single use straps, economical.

Base material: Polyethylene

Standard colors: Black, white

Standard widths (inches): 5/8, 3/4, 1, 1-1/2, 2, 4

Standard put-ups (yards): 50 yd roll

Adhesive type: 15, 19

Cycle life: Medium / Low

Suggested mating component: Loop 3905, Loop 3610



VELCRO® Brand

Loop 3905

Medical, orthopedic braces, blood pressure cuffs, supports, sports apparel, cleaning products.

Base material: Nylon

Standard colors: Black, white

Standard widths (inches): 5/8, 3/4, 1, 1-1/2, 2

Standard put-ups (yards): 100 yd roll, 250 yd roll

Adhesive type: 19, 72

Cycle life: Low

Suggested mating component: Hook 830, Hook 811



VELCRO® Brand

Loop 3610

Medical, orthopedic braces, blood pressure cuffs, supports, sports apparel, cleaning products.

Base material: Nylon

Standard colors: Black, white, beige

Standard widths (inches): 5/8, 3/4, 1, 1-1/2, 2, 4

Standard put-ups (yards): 50 yd roll, 100 yd roll

Adhesive type: 19, 72

Cycle life: Medium

Suggested mating component: Hook 845, Hook 811



VELCRO® Brand

Loop 3003

Medical, orthopedic braces, supports, sports apparel, cleaning products, displays.

Base material: Nylon

Standard colors: Black, white

Standard widths (inches): 5/8, 3/4, 1, 1-1/2, 2, 4

Standard put-ups (yards): 40 yd roll, 60 yd roll

Cycle life: High / Medium

Suggested mating component: Hook 88







Pressure sensitive adhesives are popular because of the ease of application. Simply remove the release liner and press the VELCRO® Brand tape in place. Pressure sensitive adhesives should always be considered semi-permanent bonds. VELCRO® Brand pressure sensitive adhesives have been engineered to offer specific performance characteristics to meet different requirements.

Acrylic: Pressure sensitive adhesives offer up to 225°F short-term heat resistance as well as good shear strength and good adhesion to most metal and medium / high surface energy plastics.

Rubber: Pressure sensitive adhesive offers up to 185°F short-term heat resistance as well as good adhesion to low surface energy substrates. They should be used indoors, at room temperature.

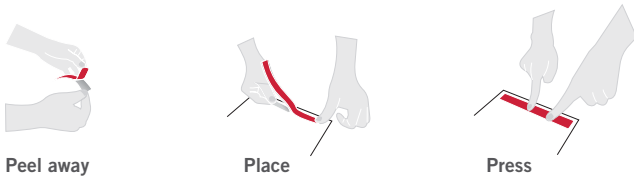Fire retardant: Fire retardant pressure sensitive adhesives are suitable for use in applications requiring certification to industry specifications, such as automotive.



	 ACRYLIC		 SYNTHETIC RUBBER				 FIRE RETARDANT	
CHARACTERISTICS	Adhesive 72	Adhesive 75	Adhesive 13	Adhesive 15	Adhesive 19	Adhesive 32	Adhesive 8219	Adhesive 8224
TACK	Moderate		High				High	
BOND STRENGTH	Achieves 80% bond strength in an hour. Full strength in 24 hours		Achieves 80% bond strength in an hour. Full strength in 24 hours				Achieves 80% bond strength in an hour. Full strength in 24 hours	
TEMPERATURE OPERATING RANGE	-30°F to 140°F		-30°F to 110°F				Temperature operating range -30°F to 110°F	
APPLICATION METHOD	Pressure		Pressure				Pressure	
SHORT-TERM HEAT RESISTANCE	225°F		185°F				185°F	
SPECIAL FEATURES	-		-				Certified to FAR 25.853 60 second burn test for nylon hook and loop and 12 second burn test for polyester hook and loop	Certified to BMS 8-285 60 second burn test for nylon hook and loop and 12 second burn test for polyester hook and loop*

*Only available to Boeing companies. All others will be certified to equivalent FAR 25.853 vertical burn tests.


Solvent and Heat Activated Adhesives



Permanent

Solvent and heat activated adhesives, available on most VELCRO® Brand hook and loop tapes, provide the strongest bond to the tape itself and can be made ready for instant bonding by many easy methods of application (e.g. solvent, heat, ultrasonic, dielectric).

Solvent: Solvent activated adhesives are recommended for applications where a more permanent bond is desired. Dry to the touch, these adhesives become tacky upon activation using solvents.

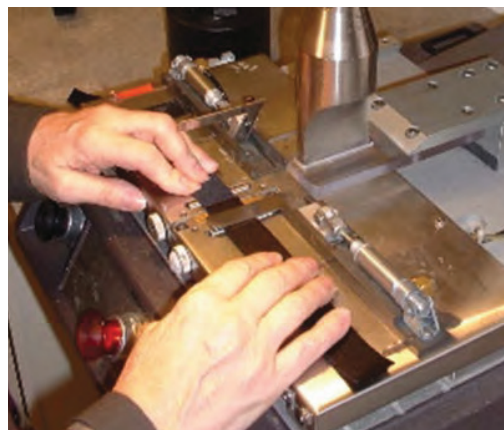
Heat Activated: Heat activated adhesives are recommended for applications where a more permanent bond is desired. Dry to the touch, these adhesives become tacky upon activation using RF welding or ironing.



	 SOLVENT	 HEAT ACTIVATED
CHARACTERISTICS	**Adhesive 40	**Adhesive 43
BOND STRENGTH	Ultimate bond strength is achieved in 24 hours	Ultimate bond strength is achieved in 24 hours
TEMPERATURE OPERATING RANGE	-40° F to 250° F	-40° F to 160° F
APPLICATION METHOD	MEK, acetone or MCL. Liquid adhesive or ultrasonically welded (porous substrates).	Ultrasonic and dielectric (RF), machinery, iron-on heat, other heat generating equipment.

**Additional testing is needed to verify these values.

Recommended Substrates

SURFACE ENERGY		SUBSTRATE	ADHESIVE	ADDITIONAL INFORMATION
<div>High</div> <div>Medium</div> <div>Low</div>		ALUMINUM	13, 15, 19, 32, 35, 72, 75	Depending on Operating Environment
		STAINLESS STEEL	13, 15, 19, 32, 35, 72, 75	Depending on Operating Environment
		COPPER	13, 15, 19, 32, 35, 72, 75	Depending on Operating Environment
		GLASS	13, 15, 19, 32, 35, 72, 75	Depending on Operating Environment
		NYLON	72, 75	
		POLYESTER	72, 75	
		POLYURETHANE	72, 75	
		ABS	72, 75	
		POLYCARBONATE	72, 75	
		ACRYLIC	72, 75	
		PVC	72, 75	
		PET	72, 75	
		POLYSTYRENE	13, 15, 19, 32, 35	
		PVA	13, 15, 19, 32, 35	
		EVA	13, 15, 19, 32, 35	
		POLYETHYLENE	13, 15, 19, 32, 35	
		POLYPROPYLENE	13, 15, 19, 32, 35	
		PTFE	13, 15, 19, 32, 35	
		PVDF	13, 15, 19, 32, 35	
		SILICONE	13, 15, 19, 32, 35	



VELCRO® Brand

Hook 88

Apparel, cable management, polishing discs, mop heads, orthopedics, seat trim, aviation, furnishings, straps.

Base material: Nylon

Standard colors: Black, white

Standard widths (inches): 1/2, 5/8, 3/4, 1, 1-1/2, 2, 3, 4

Standard put-ups (yards): 25 yd roll

Cycle life: High

Suggested mating component: Loop 1000



VELCRO® Brand

Loop 1000

Apparel, cable management, polishing discs, mop heads, orthopedics, seat trim, aviation, furnishings, straps.

Base material: Nylon

Standard colors: Black, white

Standard widths (inches): 1/2, 5/8, 3/4, 1, 1-1/2, 2, 3, 4

Standard put-ups (yards): 25 yd roll

Cycle life: High

Suggested mating component: Hook 88



VELCRO® Brand

Hook 89

Professional apparel (military, firefighters, etc.), mop heads, applications requiring IR resistance.

Base material: Nylon

Standard colors: Black, tan, coyote, foliage green

Standard widths (inches): 1/2, 5/8, 3/4, 1, 1-1/2, 2, 3, 4

Standard put-ups (yards): 25 yd roll

Cycle life: High

Suggested mating component: Loop 1100



VELCRO® Brand

Loop 1100

Professional apparel (military, firefighters, etc.), mop heads, applications requiring IR resistance.

Base material: Nylon

Standard colors: Black, tan, coyote, foliage green

Standard widths (inches): 1/2, 5/8, 3/4, 1, 1-1/2, 2, 3, 4

Standard put-ups (yards): 25 yd roll

Cycle life: High

Suggested mating component: Hook 89



VELCRO® Brand

Hook 65

Apparel, cable management, orthopedics, seat trim, aviation, furnishings, straps.

Base material: Nylon

Standard colors: Black, white

Standard widths (inches): 1/2, 5/8, 3/4, 1, 1-1/2, 2, 3, 4

Standard put-ups (yards): 25 yd roll

Cycle life: High

Suggested mating component: Loop 2000



VELCRO® Brand

Loop 2000

Apparel, cable management, polishing discs, mop heads, orthopedics, seat trim, aviation, furnishings, straps.

Base material: Nylon

Standard colors: Black

Standard widths (inches): 1/2, 5/8, 3/4, 1, 1-1/2, 2, 3, 4

Standard put-ups (yards): 25 yd roll

Cycle life: High

Suggested mating component: Hook 88





VELCRO® Brand

Hook 81

Apparel, outdoor applications, other applications requiring weather (moisture and UV) resistance.

Base material: Polyester

Standard colors: Black, white

Standard widths (inches): 5/8, 3/4, 1, 1-1/2, 2, 4

Standard put-ups (yards): 25 yd roll

Cycle life: Medium

Suggested mating component: Loop 9000 Polyester



VELCRO® Brand

Loop 9000

Apparel, outdoor applications, other applications requiring weather (moisture and UV) resistance.

Base material: Polyester

Standard colors: Black, white

Standard widths (inches): 5/8, 3/4, 1, 1-1/2, 2, 4

Standard put-ups (yards): 25 yd roll

Cycle life: Medium

Suggested mating component: Hook 081 Polyester



VELCRO® Brand

VELCOIN®

Apparel, office folders, stationery, rigid packaging and trays, bag closure.

Base material: Nylon

Standard colors: Black, white

Standard widths (inches): 1/2, 5/8, 3/4, 7/8, 1-3/8, 1-7/8

Standard put-ups (yards): 25 yd roll

Cycle life: High

Suggested mating component: Hook 88, Loop 1000



VELCRO® Brand

Hook 705

Adjustable straps, signage, POP, displays.**Base material:** Nylon**Standard colors:** Black, white**Standard widths (inches):** 5/8, 3/4, 1, 1-1/2, 2, 4**Standard put-ups (yards):** 50 yd roll**Cycle life:** High / Medium**Suggested mating component:** Loop 1000, Loop 3003

VELCRO® Brand

Hook 805

Polishing discs, headgear, orthopaedic braces, helmets, moulding, RF weldable.**Base material:** Nylon**Standard colors:** Black, white**Standard widths (inches):** 5/8, 3/4, 1, 1-1/2, 2, 4**Standard put-ups (yards):** 50 yd roll**Cycle life:** High / Medium**Suggested mating component:** Loop 3610

VELCRO® Brand

Hook 711

Medical applications, sports equipment.**Base material:** Polyethylene**Standard colors:** Black, white, natural**Standard widths (inches):** 5/8, 3/4, 1, 1-1/2, 2, 4**Standard put-ups (yards):** 25 yd roll**Cycle life:** Medium / Low**Suggested mating component:** Loop 3003, Loop 3200



VELCRO® Brand

Hook 811



Medical disposable, sterilize goods, single use straps, economical.

Base material: Polyethylene

Standard colors: Black, white

Standard widths (inches): 5/8, 3/4, 1, 1-1/2, 2, 4

Standard put-ups (yards): 50 yd roll

Cycle life: Medium / Low

Suggested mating component: Loop 3905, Loop 3610



VELCRO® Brand

Loop 3905

Medical, orthopedic braces, blood pressure cuffs, supports, sports apparel, cleaning products.

Base material: Nylon

Standard colors: Black, white

Standard widths (inches): 5/8, 3/4, 1, 1-1/2, 2

Standard put-ups (yards): 100 yd roll, 250 yd roll

Cycle life: Low

Suggested mating component: Hook 830, Hook 811



VELCRO® Brand

Loop 3610

Medical, orthopedic braces, blood pressure cuffs, supports, sports apparel, cleaning products.

Base material: Nylon

Standard colors: Black, white, beige

Standard widths (inches): 5/8, 3/4, 1, 1-1/2, 2, 4

Standard put-ups (yards): 50 yd roll, 100 yd roll

Cycle life: Medium

Suggested mating component: Hook 845, Hook 811



VELCRO® Brand

Loop 3003

Medical, orthopedic braces, supports, sports apparel, cleaning products, displays.

Base material: Nylon

Standard colors: Black, white

Standard widths (inches): 5/8, 3/4, 1, 1-1/2, 2, 4

Standard put-ups (yards): 40 yd roll, 60 yd roll

Cycle life: High / Medium

Suggested mating component: Hook 88





VELCRO® Brand

ONE-WRAP®

Cable/wire management, electrical wires, adjustable straps, materials handling.

Base material: Polyethylene / Nylon Knit

Standard colors: Black (330), white (010), beige (200), royal blue (155), light grey (300), red (520), coachman green (650), yellow (750), purple (557), brown (250)

Standard widths (inches): 3/8, 1/2, 5/8, 3/4, 1, 1-1/2, 2, 4

Standard put-ups (yards): 25 yd roll, 150 yd roll, 200 yd roll

Adhesive type: N/A

Cycle life: Medium

Suggested mating component: Self-engaging



VELCRO® Brand

ONE-WRAP® Strap

Cable/wire management, electrical wires, adjustable straps, materials handling.

Base material: Polyethylene / Nylon Knit

Standard colors: Black (330), white (010), beige (200), royal blue (155), light grey (300), red (520), coachman green (650), yellow (750), purple (557), brown (250)

Standard widths (inches): 1/2 x 8, 1/2 x 10, 3/4 x 5, 3/4 x 6, 3/4 x 8, 3/4 x 12, 3/4 x 18, 1 x 8, 1 x 12, 1-3/4 x 23-1/2

Standard put-ups (yards): 25 yd roll, 150 yd roll, 200 yd roll

Adhesive type: N/A

Cycle life: Medium

Suggested mating component: Self-engaging



VELCRO® Brand

ONE-WRAP® - FR

Plenum rated, cable/wire management, electrical wires, materials handling.

Base material: Polypropylene / Nylon Knit

Standard colors: Black (330), cranberry

Standard widths (inches): 3/8, 1/2, 5/8, 3/4, 1, 1-1/2, 2, 4

Standard put-ups (yards): 25 yd roll, 150 yd roll, 200 yd roll

Adhesive type: N/A

Cycle life: Medium

Suggested mating component: Self-engaging



Cable Management

VELCRO® Brand

ONE-WRAP® Strap - FR

Plenum rated, cable/wire management, electrical wires, adjustable straps, materials handling.

Base material: Polyethylene / Nylon Knit

Standard colors: Black (330), cranberry

Standard widths (inches): 1/2 x 8, 1/2 x 10, 3/4 x 5, 3/4 x 6, 3/4 x 8, 3/4 x 12, 3/4 x 18, 1 x 8, 1 x 12, 1-3/4 x 23-1/2

Standard put-ups (yards): 25 yd roll, 150 yd roll, 200 yd roll

Adhesive type: N/A

Cycle life: Medium

Suggested mating component: Self-engaging



VELCRO® Brand

QWIK TIE

Cable/wire management, electrical wires, materials handling, printable.

Base material: Polyethylene / Nylon

Standard colors: Black (330), white (010), red (514), gray (303)

Standard widths (inches): 1/2, 5/8, 3/4, 1

Standard put-ups (yards): 25 yd roll

Adhesive type: N/A

Cycle life: Medium

Suggested mating component: Self-engaging



VELCRO® Brand

QWIK TIE Straps

Cable/wire management, electrical wires, materials handling, printable.

Base material: Polyethylene / Nylon

Standard colors: Black (330), white (010), red (514), gray (303)

Standard widths (inches): 3/4 x 5, 3/4 x 6, 3/4 x 8, 3/4 x 12

Standard put-ups (yards): 25 yd roll

Adhesive type: N/A

Cycle life: Medium

Suggested mating component: Self-engaging





VELCRO® Brand

BUNDLE TIES

Cable/wire management (disposable), agriculture, produce bundling, gardening, single-use straps.

Base material: Polypropylene / polyester nonwoven

Standard colors: Black (330), white (010), emerald green (632), moss green (684)

Standard widths (inches): 1/2, 5/8, 3/4, 1

Standard put-ups (yards): 10 yd roll, 30 yd roll, 38.5 yd roll, 50 yd roll

Adhesive type: N/A

Cycle life: Low

Suggested mating component: Self-engaging





VELCRO® Brand

Hook 511

Molded Hook designed for applications which require higher peel and shear strength.

Base material: Nylon

Standard colors: Black, natural

Standard widths (inches): 1"

Standard put-ups (yards): 25 yd roll

Adhesive type: 15, 72

Cycle life: Medium / Low

Suggested mating component: Loop 1000



Specialty Hook & Loop

Molded Hook

VELCRO® Brand

Hook 757

Molded Hook designed for strong hook engagement. RV panels, attach scrubbing pads, ceiling panels.

Base material: Nylon

Standard colors: Black


Standard widths (inches): 5/8, 3/4, 1, 1-1/2, 2, 4

Standard put-ups (yards): 25 yd roll

Adhesive type: 15, 72

Cycle life: Low

Suggested mating component: Loop 1000, Loop 3001

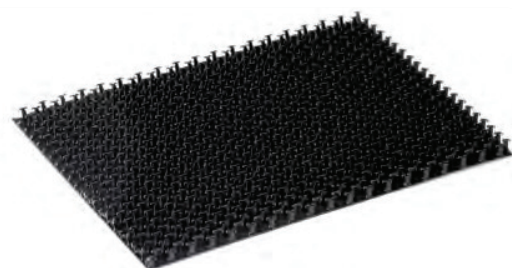

VELCRO® Brand

Loop 1000

Apparel, cable management, polishing discs, mop heads, orthopedics, seat trim, aviation, furnishings, straps.

Base material: Nylon

Standard colors: Black, white

Standard widths (inches): 1/2, 5/8, 3/4, 1, 1-1/2, 2, 3, 4

Standard put-ups (yards): 25 yd roll

Adhesive type: 40 (solvent), 43 (heat)

Cycle life: High

Suggested mating component: Hook 88



Specialty Hook & Loop

Heat, Solvent or Weldable

Specialty Hook & Loop

Heat, Solvent or Weldable

VELCRO® Brand

Hook 88

Apparel, cable management, polishing discs, mop heads, orthopedics, seat trim, aviation, furnishings, straps.

Base material: Nylon

Standard colors: Black, white

Standard widths (inches): 1/2, 5/8, 3/4, 1, 1-1/2, 2, 3, 4

Standard put-ups (yards): 25 yd roll

Adhesive type: 40 (solvent), 43 (heat)

Cycle life: High

Suggested mating component: Loop 1000



VELCRO® Brand

Hook 848

Blood pressure cuffs, vinyl pouches.

Other applications requiring welding onto vinyl substrates.

Base material: Vinyl

Standard colors: Black, white

Standard widths (inches): 5/8, 3/4, 1, 1-1/2, 2, 4, 12

Standard put-ups (yards): 50 yd roll

Adhesive type: N/A

Cycle life: High / Medium

Suggested mating component: Loop 3607



VELCRO® Brand

Knit Loop 3607

Blood pressure cuffs, vinyl pouches.

Other weldable applications onto vinyl substrates.

Base material: Nylon / Backing PVC film

Standard colors: Black, white

Standard widths (inches): 5/8, 3/4, 1, 1-1/2, 2, 4, 50

Standard put-ups (yards): 50 yd roll

Adhesive type: N/A

Cycle life: Medium

Suggested mating component: Hook 848





Specialty Hook & Loop Elastic Loop

VELCRO® Brand

VELSTRETCH® Loop 151

Elastic straps, fetal monitor, headgear, orthopedic immobilizers, straps.

Base material: Nylon, elastomer

Standard colors: Black, white

Standard widths (inches): 5/8, 3/4, 1, 1-1/2, 2

Standard put-ups (yards): 25 yd roll, 40 yd roll

Adhesive type: N/A

Cycle life: High / Medium

Suggested mating component: Hook 65



VELCRO® Brand

Loop 152

Medical applications, sports equipment.

Base material: Nylon / Spandex

Standard colors: Black, white

Standard widths (inches): 1, 1-1/2, 2

Standard put-ups (yards): 25 yd roll

Adhesive type: N/A

Cycle life: Medium / Low

Suggested mating component: Hook 88, Hook 745



Specialty Hook & Loop FR & High Temperature

VELCRO® Brand

HI-AIR® Hook 66

Self-extinguishing garments, military apparel, transportation interiors.

Base material: Nylon, NOMEX® fibers

Standard colors: Natural

Standard widths (inches): 1, 2

Standard put-ups (yards): 50 yd roll

Adhesive type: 72

Cycle life: High

Suggested mating component: HI-AIR® Loop 3000



Specialty Hook & Loop

FR & High Temperature

VELCRO® Brand

HI-AIR® Loop 3000

Self-extinguishing garments, military apparel, transportation interiors.

Base material: Nylon, NOMEX® fibers

Standard colors: Natural

Standard widths (inches): 1, 2

Standard put-ups (yards): 50 yd roll

Adhesive type: 72

Cycle life: Medium

Suggested mating component: HI-AIR® Hook 66



VELCRO® Brand

HI-GARDE® Hook 46

Heat and chemical resistant applications.

Base material: Stainless Steel

Standard colors: Steel Grey

Standard widths (inches): 1

Standard put-ups (yards): 75 ft roll

Adhesive type: N/A

Cycle life: Low

Suggested mating component: HI-GARDE® Loop 8000



VELCRO® Brand

HI-GARDE® Loop 8000

Heat and chemical resistant applications.

Base material: Stainless Steel

Standard colors: Steel Grey

Standard widths (inches): 1

Standard put-ups (yards): 75 ft roll

Adhesive type: N/A

Cycle life: Low

Suggested mating component: HI-GARDE® Hook 46





VELCRO® Brand

VEL-LOC® 87S

Automotive, apparel, shoes, bags.

Base material: Polypropylene mushroom Hook

Standard colors: Black, white

Standard widths (inches): 1, 1-1/2, 2

Standard put-ups (yards): 50 yd roll

Adhesive type: 15

Cycle life: Medium / Low

Suggested mating component: Loop 1000



VELCRO® Brand

VELTEX® Laminated Loop

Exhibits, tradeshow displays, POP.

Base material: Nylon knit fabric, polyester / polyurethane foam, nylon tricot back fabric

Standard colors: Black (803), white (819), eggshell (818), beige (817), pink (822), spanish red (813), par green (834), jungle green (814), ice blue (806), royal blue (807), navy (805), purple (839), sterling (800), platinum (820), antique grey (821)

Standard widths (inches): 60

Standard put-ups (yards): 40 yd roll

Adhesive type: N/A

Cycle life: Medium

Suggested mating component: Hook 88



Specialty Hook & Loop Woven



Specialty Hook & Loop Display



Specialty Hook & Loop Hardware

VELCRO® Brand

VELSTICK®

Automotive headliners, attaching cushions, mounting gym wall mats.

Base material: Nylon, polyester, polypropylene

Standard colors: Black

Standard widths (inches): 1, 1-3/4

Standard put-ups (yards): 4ft lengths, 500 ft rolls

Adhesive type: N/A

Cycle life: High

Suggested mating component: Can be riveted, stapled or nailed





VELCRO® Brand

VELSTRAP®, Facestrap, Backstrap, Cinch Straps



Cable management, tourniquets, packaging, automotive accessories, wrapping, cinching, bundling.

Base material: Nylon / Polyester

Standard colors: Black, white

Standard widths (inches): 1, 2

Standard put-ups (each): Custom fabrication available

Adhesive type: N/A

Cycle life: High / Medium

Suggested mating component: Hook 88, Loop 1000



VELCRO® Brand

LOGISTRAP™

Pallet fastening, warehouse management, fastening systems.

Base material: Nylon

Standard colors: Blue, orange

Standard widths (inches): 2

Standard put-ups (yards): 2" x 16' or 2" x 23'

Adhesive type: None

Cycle life: High

Suggested mating component: Self-engaging

