

FNCEF200 FNCEF250



Cleaning Guide:

See instructions with product packaging

Falcon Ceiling Exhaust Fans

- Easy to clean clip on grille
- High performance ball bearing motor
- Compatible with our Hyena Surface Sockets

FNCEF200 - Ceiling Exhaust Fan 200mm

- **Cut out size: Ø 240mm / Overall diameter 300mm**
- 107mm product height without fascia
- 117mm product height including fascia
- 100mm minimum height clearance from rooftop to ceiling
- 214mm air outlet diameter
- Air flow 240m³ per hour
- 25 Watt ball bearing motor



Easy to Clean Grille



High Performance
Ball Bearing Motor

FNCEF250 - Ceiling Exhaust Fan 250mm

- **Cut out size: Ø 290mm / Overall diameter 355mm**
- 103mm product height without fascia
- 112mm product height including fascia
- 100mm minimum height clearance from rooftop to ceiling
- 270mm air outlet diameter
- Air flow 401m³ per hour
- 35 Watt ball bearing motor



Frame design has rotating clamp
lugs for ease of installation.

Cross Reference Chart

Trader	Clipsal*
FNCEF200	CE200
FNCEF250	CE250

Catalogue Number	Description
FNCEF200	Ceiling Exhaust Fan 200mm
FNCEF250	Ceiling Exhaust Fan 250mm

*The Clipsal brand and associated products are registered trademarks of Schneider Electric (Australia) Pty Ltd. GSM Electrical (Australia) Pty Ltd, the TRADER brand and its products, have no endorsement or affiliation with Schneider Electric Pty Ltd.

Certification Number: GMA-510581-EA

GSM Electrical (Australia) Pty Ltd

Level 2, 142-144 Fullarton Road, Rose Park SA 5067

P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au

www.gsme.com.au



Data Specification Sheet
220504



**FNCEFDSR
FNCEFDSS**




Cleaning Guide:

See instructions with product packaging

Falcon Ceiling Exhaust Fans Ducted Round or Square

- High air extraction up to 270m³/hr
- Energy efficient 30 Watt ball bearing motor
- Rated voltage 220-240V~50Hz
- Cutout size Ø240mm
- Ducting Outlet Ø100mm
- Power cord included
- Slide is ducted with draft stopper
- Cutting Template Ø240mm (on inside top flap of packaging), also provided in box
- Does not come with duct or outlet grille
- Quick and easy installation
- Ideal for bathrooms, toilets, or kitchens

SAFETY WARNING: All power outlets or electrical wiring must be installed by a licensed and qualified electrician.

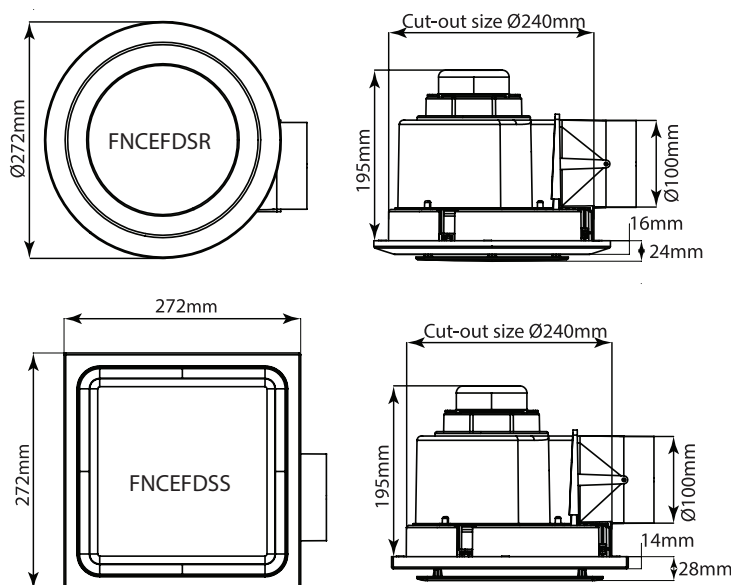

Catalogue Number	Description
FNCEFDSR	Ceiling Exhaust Fan Ducted, 240mm cut-out, Small, Round Fascia
FNCEFDSS	Ceiling Exhaust Fan Ducted, 240mm cut-out, Small, Square Fascia

Certification Number:
GMA-512149-EA

GSM Electrical (Australia) Pty Ltd
Level 2, 142-144 Fullarton Road, Rose Park SA 5067
P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au
www.gsme.com.au



Data Specification Sheet
January 2023



**FNCEFDR
FNCEFDS
FNCEFDG**



Cleaning Guide:

See instructions with product packaging





Falcon Ceiling Exhaust Fan Ducted


- Ideal for rapid removal of steam and odours
- Easy to clean grille
- Quiet operation
- Built in non-return draft excluder
- Retro-fit for 290mm round cut-out
- Plug and lead fitted
- No duct included (150mm duct compatible)
- Suitable for ceilings between 5mm and 12mm
- 40 Watt Ball Bearing Motor
- Ducting Outlet Ø150mm
- Airflow 350 m³/h
- Cutout size Ø290mm
- **FNCEFDS** once the fascia has been attached the fascia can be rotated approx. 45deg clockwise/anti-clockwise to gain the correct alignment.
- **FNCEFDG** (Grille) - includes fly mesh and duct clamps (150mm duct compatible)

SAFETY WARNING: All power outlets or electrical wiring must be installed by a licensed and qualified electrician.

Catalogue Number	Description
FNCEFDR	Ceiling Exhaust Fan Ducted, Round
FNCEFDS	Ceiling Exhaust Fan Ducted, Square
FNCEFDG	Ceiling Exhaust Fan Ducted, Grille

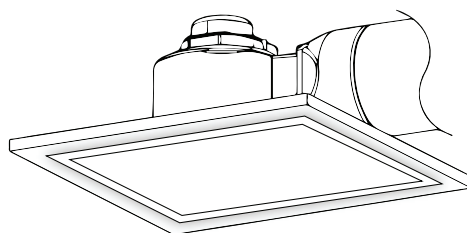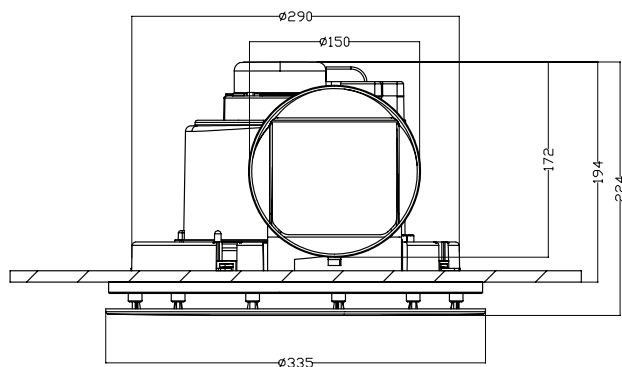

FNCEFDS

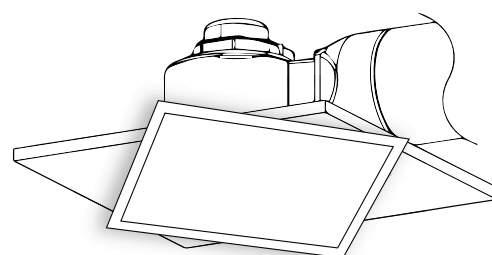

FNCEFDS rotated approx 45deg

Certification Number:
GMA-512149-EA

GSM Electrical (Australia) Pty Ltd
Level 2, 142-144 Fullarton Road, Rose Park SA 5067
P: 1300 301 838 F: 1300 301 778 E: service@gsme.com.au
www.gsme.com.au



Data Specification Sheet
January 2023