

WALL MOUNTED FANS




HXM Fans

The HXM Series of wall mounted square plate fans is designed for general ventilation applications such as cafés, bars, industrial laundries and workshops.



Applications


- Work shops
- Store rooms
- Industrial laundries
- Cooking areas
- Fast food shops
- Under floor ventilation

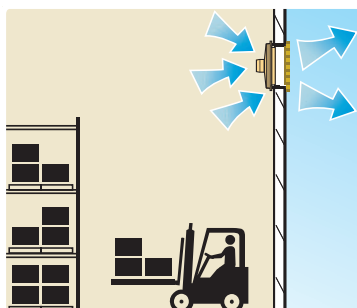

Features

- High air flow at a low cost.
- Light weight metal construction.
- Rated "Continuous Run".
- Self setting thermal cut-out switch.
- Speed-controllable.
- IP Rating-IP40 to model 350, IP44 model 400.
- 220-240V, single-phase, 50Hz.

Performance Curve

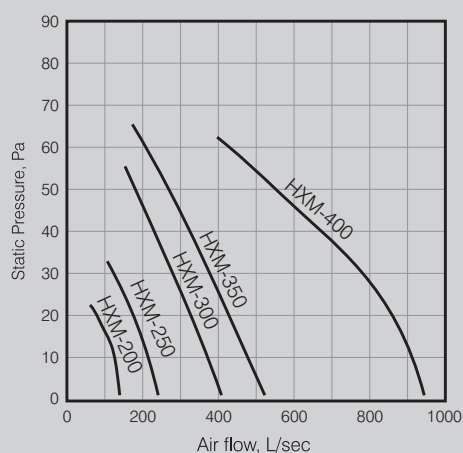


Technical Data

Model No.	m ³ /hr†	L/sec†	Fan Speed, rpm	dB(A) @ 3m	Watts
HXM-200	504	140	1300	30	16
HXM-250	900	250	1300	36	22
HXM-300	1440	390	1300	42	22
HXM-350	1800	500	1300	47	40
HXM-400	3384	940	1320	51	170

† Maximum air flow without duct and fittings

Dimensions

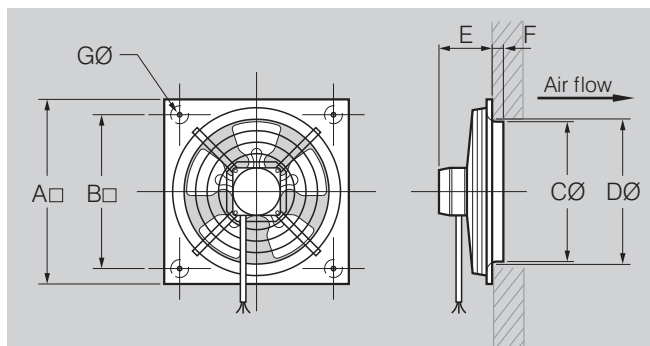

Model Number	A	B	C	D	E	F	G
HXM-200	266	222	205	211	86	19	9
HXM-250	333	276	255	261	93	31	9
HXM-300	400	337	305	311	93	36	10.5
HXM-350	465	390	361	371	106	35	10.5
HXM-400	500	420	400	414	141	52	10

All dimensions in mm.

Accessories

- Run-on Timer (page 29)
- Speed Controller/Switch (page 30)
- External Grilles (Gravity louvre) (Contact Fantech)
- Wall Tube (page 34)