



garland
cables

pro series

Industrial / Power / Data / Security / Fibre

Garland's Pro Series range is the experts' choice for high quality cables.

Part No: TCW84CL

Description	Stranded 13AWG PACW, Figure 8 construction, PVC Insulation.
Applicable Standards	AS/NZS 1125, AS/NZS 3808
Suitable Applications	For the wiring of electronic and allied equipment, extension speakers, security system etc.

Cable Construction Drawing



Cable Construction Relative Parts

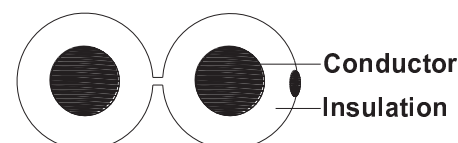


Figure 8 Cable

Cable Description

Conductor	AWG	Stranding	Area(mm ²)	Diameter(mm)	Material
	13	84/0.2	2.64	2.11	PACW
Insulation	Cores : Material : Colour :		2 PVC Transparent Pink/Black Stripe		
	Nominal Thickness (mm) :		1.2		
	Nominal OD (mm) :		4.5 x 9.0		

Electrical Properties

Max. Conductor DC Resistance @ 20°C	7.7Ω/km
Min. Insulation Resistance @ 20°C	50MΩ.km
Voltage Test: Conductor to core	1.0 kV ac/1min

With Garland, you are always well connected.

Sales Enquiries 1800 66 99 99
www.madisontech.com.au/garland

made by





garland
cables

pro series

Industrial / Power / Data / Security / Fibre

Garland's Pro Series range is the experts' choice for high quality cables.

Voltage Rating	ELV
----------------	-----

Mechanical Properties

Operating Temperature Range	-15 to 70°C
Max. Recommended Pulling Tension	369N
Min. Bend Radius (install)	45mm
Approximate Mass	8.38kg/100m

Supply Information

Pack Size	Pack Type	Dimensions	Qty Per Carton	Cartons Per Pallet
100m	Plastic Reel	10 x 4.5 x 5.2"	2R	
500m	Wooden Reel	W42 x H21.8cm	1R	

- Madison reserves the right to make changes to the products described in this specification without prior notice
- All values subject to factory tolerances

With Garland, you are always well connected.

Sales Enquiries **1800 66 99 99**
www.madisontech.com.au/garland

made by



madison