


RU Series - Universal Relays



- 100% robotic assembly
- DPDT 10A, 4PDT 6A and bifurcated 4PDT 3A contacts
- Spot-welding technology eliminates internal wires and solder
- Non-polarized, green LED
- Color-coded, snap-on marking plates
- RoHS compliant

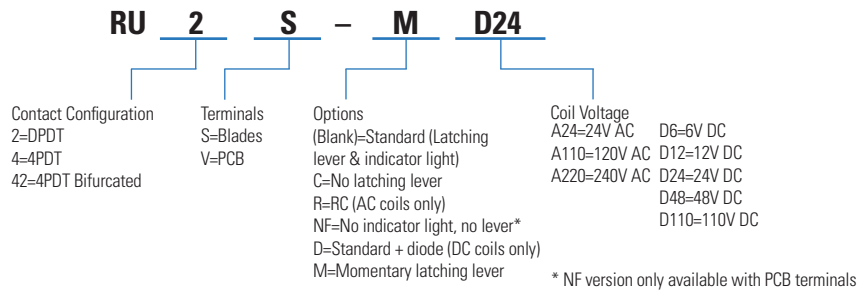

Specs		RU2	RU4	RU42
	Contact Material	AgSn0In	AuAg/Ag	AuAg/AgNi
	Contact Rating	10A	6A	3A (bifurcated)
	Minimum Load (reference values)	5mA@24V DC		
	Dimensions (w x d x h) mm	21x27.5x41.4		

Relays		Spring Clamp DIN Rail Mount	Standard DIN Rail Mount	Finger-safe DIN Rail Mount	Panel Mount	PCB Mount
Sockets	RU2S (DPDT)	SU2S-11L	SM2S-05	SM2S-05C	SY4S-51	SM2S-61
	RU4S (4PDT)	SU4S-11L	SY4S-05	SY4S-05C		SM2S-62
	RU42S (4PDT)					SY4S-61
						SY4S-62

800.262.4332

www.IDEC.com/relays

		Relays / Sockets	Description	For DIN Mount Socket	For Through Panel & PCB Mount Socket
Accessories	Hold Down Springs & Clips	RU2S/RU4S/RU42S	Pullover Wire Spring	SY4S-02F1	SY4S-51F1
		RU2S/RU4S/RU42S	Leaf Spring (side latch)	SFA-202	SFA-302
		RU2S/RU4S/RU42S	Leaf Spring (top latch)	SFA-101	SFA-301
	DIN Rail	all DIN mount sockets	Aluminum DIN Rail (1 meter length)	BNDN1000	—
			DIN Rail End Stop	BNL5	—
	Marking Plate	all RU relays	Replacement Marking Plates	RU9Z-P* (*Specify color code. A=orange, G=green, W=white, Y=yellow)	