



Representative Photo Only
(actual product may vary based on configuration selections)

Delta AC Max 22 kW Type 2 Plug 5 m Cable Basic

- Charging at 32 A, 415 V, Three phase, 22 kW output
- IP55 Ingress Protection
- IK09 Enclosure Protection according to IEC62262
- 5 m Type 2 cable (Mennekes)
- Modern and Stylish design
- Maximum charging current selected by hardware DIP switch
- Wall mounted or Stand
- Internal RCD AC 30 mA , DC 6 mA
- Single Phase: 230 V, 50-60 Hz, 32 A (maximum)
- Three Phase: 400 V, 50-60 Hz, 16 A, 32 A (maximum)
- CE , UKCA , AS/NZS 3000:2007 , IEC 60947-2 , IEC 61851-1, IEC 62196-2
- 22 kW AC charger improves parking turnover
- Low standby power consumption for energy-saving
- Ideal for Residential Area, Parking , Commercial Buildings

SPECIFICATIONS

Component Type Electric Vehicle Charging	AC Chargers
Height	371 mm
Width	218 mm
Depth	167 mm
Weight	3.7 kg
Relative Humidity, Max	95 %RH
Humidity Type	Non-condensing
Operating Temperature, Min	-30 °C min
Operating Temperature, Max	50 °C max
Storage Temperature, Min	-40 °C min
Storage Temperature, Max	80 °C max
CE Marked	Yes
Input Current, Max	32 A max
Output Current, Max	32 A max
Input Voltage, 1ph, min (rms)	200 V AC min (rms)
Input Voltage, 1ph, max (rms)	230 V AC max (rms)
Input voltage, 3ph, nom (rms)	415 V AC nom (rms)
Input Voltage, 3ph, min (rms)	400 V AC min (rms)
Input Voltage, 3ph, max (rms)	415 V AC max (rms)
Input Frequency, Min	50 Hz
Input Frequency, Max	60 Hz
Altitude, Operating, Max	2000 m
Connector(s), Vehicle	Type 2 vehicle
Certifications	CE RCM
IK Rating	IK09
IP Rating	IP55
Standards Compliance	AS/NZS 3000:2007 IEC 60947-2

Catalogue No: **EIAWE22KTBE5A02**

DELTA AC MAX BASIC 22kW EV CHARGER T2 TETHERED 5M CABLE

Electric Vehicle Charging Equipment > AC Chargers > AC Chargers up to 22kW > AC Max 22 kW Chargers > AC Max Three Phase Chargers > Type 2 Tethered Cable



REFERENCES

IECEX Certificate -


Supplier Declaration of
Conformity: -

Installation Guide: -

User Manual: -

Manufacturer Datasheet: -

Manufacturer Catalogue
& Product Selection: -

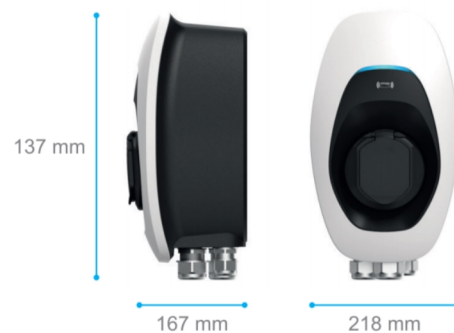

Dimension Diagram