

# MASTER TL5 Circular

MASTER TL5 Circular 40W/830 1CT/10

16 mm tube diameter circular fluorescent lamps with a choice of various diameters



## Product data

### • General Information

Cap base	2GX13 [ 2GX13]
Bulb shape	C-T5 [ C-T 16 mm]
Life to 50% failures preheat (nom.)	12000 h
LSF Preheat 2000 h Rated	99 %
LSF Preheat 4000 h Rated	99 %
LSF Preheat 6000 h Rated	96 %
LSF Preheat 8000 h Rated	89 %
LSF Preheat 16000 h Rated	10 %
LSF Preheat 20000 h Rated	1 %

### • Light Technical

Lamp Luminous Flux 25°C EL (Nom)	3300 lm
Lamp Luminous Flux (Nom)	3300 lm
Colour Designation	Warm white (WW)
Chromaticity coordinate X (nom.)	440
Chromaticity coordinate Y (nom.)	403
Colour Temperature, horizontal (Nom)	3000 K
Lamp Luminous Efficacy EM (Nom)	83 lm/W
Colour Rendering Index,horiz (Max)	85
Colour Rendering Index,horiz (Min)	80

Colour Rendering Index,horiz (Nom)	85
LLMF 2000 h Rated	91 %
LLMF 4000 h Rated	87 %
LLMF 6000 h Rated	84 %
LLMF 8000 h Rated	81 %
LLMF 12000 h Rated	77 %
LLMF 16000 h Rated	74 %
LLMF 20000 h Rated	72 %

### • Operating and Electrical

Power (Rated) (Nom)	39.9 W
Lamp current (nom.)	0.320 A

### • Temperature

Design temperature (nom.)	35 °C
---------------------------	-------

### • Controls and Dimming

Dimmable	yes
----------	-----

### • Approval and Application

Energy efficiency label (EEL)	A
Mercury (Hg) content (nom.)	2.5 mg
Energy Consumption kWh/1000 h	44 kWh

### • Product Data

Full product code	871150064097025
-------------------	-----------------

# PHILIPS

# MASTER TL5 Circular

Order product name MASTER TL5 Circular 40W/830  
1CT/10  
EAN/UPC – product 8711500640970  
Order code 927965583013  
Local Code TL5C40W830  
Numerator – quantity per pack 1


Numerator – packs per outer box 10  
Material no. (12NC) 927965583013  
Net weight (piece) 110.000 g  
ILCOS Code FSC40/30/1B-L/P-2GX13-16

## Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and

remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


## Dimensional drawing

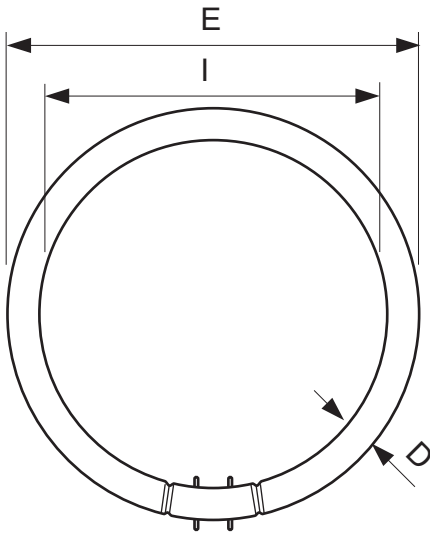


C-T5, 2GX13

## TL5-C 40W/830

Product	D	D	E	E	I	I
MASTER TL5 Circular 40W/830 1CT/10	18 mm	14 mm	293 mm	305 mm	260 mm	272 mm



## Photometric data

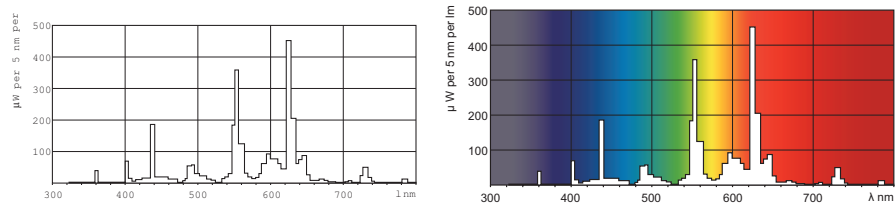

© 2015 Philips Lighting Holding B.V.  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2015, December 28  
data subject to change