


METALARC™ BRITELINE



- MetalArc Briteline is a well established and popular family of linear double ended Metal Halide lamps
- Optimised lamp design complements fixture designs providing excellent optical control and high efficiencies as required in large area indoor and outdoor lighting projects
- High luminous efficiency of up to 107 lm/W
- Colour Rendering Index Class: 2B
- Average lamp life based on following switching cycles:
 2000T8/SB @ 4 hrs 6000 hours
 1500W @ 5 hrs: 3000 hours
 2000W T8/T9 @5 hrs 3000 hours
 2000W T10 @5 hrs 6000 hours
 @11hrs 8000 hours

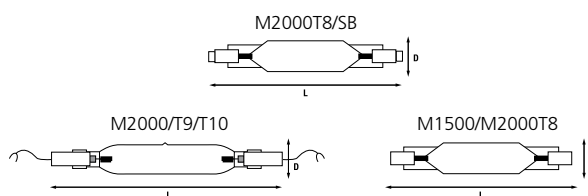

Briteline	1500W	2000WT8	M2000T8/SB	2000WT9	2000WT10
L	256	274	311	254	268
D	22	25	25	29	32

METALARC BRITELINE

Code	Description	Watt	Volt	Current	Cap	Lamp Finish	Colour Temp	CRI Group	Luminous Flux	Packing Qty.
Metalarc Briteline										
662060	M1500T7/DE	1500W	500V	3.20A	RX7s	Clear	4200K	2B	150000 lm	10
666270	M2000T8/DE	2000W	250V	8.50A	RX7s	Clear	4000K	2B	200000 lm	10
666280	M2000T8/SB	2100W	230V	10.30A	Special	Frosted	5200K	2B	215000 lm	2
666310	M2000T9/DE	2000W	250V	8.50A	Cable	Clear	4200K	2B	180000 lm	10
203399	M2000T10/DE	2100W	220V	10.70A	Cable	Clear	4100K	2B	225000 lm	10

